

NEON CATALOG

LED NEON



◀ 2026 ▶

Tailored Excellence. Flexible Solutions.



TAILORED EXCELLENCE. FLEXIBLE SOLUTIONS.

INDEX

TOP BENDING

NDF1617	043
NDF1617-DMX	045
NDF1617L	046
NDF1617A	047
NDF1617H	048
NDF1617-Black	049
NDF1717SS	050
NDF1212	051
NDF1010	052
NDF1010-WN	053
NDF1010-RGB	054
NDF1010-RGBW	055
NDF1010A	056
NDF1005	057
NDF1306-COB	058
NDR2018	059
NDR2018-SPI	060
NDR1414	061
NDR0604-COB Plus	062
NDR1004-COB Plus	063

SIDE BENDING

NSF1617	067
NSF1617-Black	069
NSF1617TS	070
NSF1212	071
NSF1220	072
NSF1017	073
NSF1010	074
NSF1010A	075
NSF0612	076
NSF0410	077
NSF0309	078
NSF0306	079
NSR1025	080
NSR0817	081
NSR0615	082
NSR0512	083
N2-4 pro	084
N2-4 plus	085

3D NEON

N2-8 Pro	087
N2-8 Plus	089
N2-8 Plus	090
N2-8 Plus	091
NMF1616TS	092
NMF1010	093
NMF1617-W	094

360° NEON

NCR32	097
NCR23	098
NCR23H	099
NCR23A	100
NCR23S	101
NCR23L	102
NCR13-COB	103

HIGH VOLTAGE SERIES

AN2-4	105
AWHE1608-D	106
AWHE1707	107
ASN2-3	108

UNDERWATER NEON

UMF2020(L)	111
UMF2020(H)	112
UMF2222-WN	113
UMF2222-RGB	114
UMF2222-RGBW	115
UMF2222-PTW-WN	116
UMF2222-SPI	117
UMF2222-DMX	118

FLEXIBLE WALL WASHER

P2-8	121
P2-8	122
P2-8 Pro	123
WHE2014	124
SFO1616	125
SFO2317	126
MFO1611	127
MFO3525	128

SAUNA ROOM SERIES

NSF1617-SN-Single color	131
NSF1617-SN-Multiple colors	132
NSF1617-SN-DMX	133
NDF1617-SN-Single color	134
NDF1617-SN-Multiple colors	135
NDF1617-SN-DMX	136
WHE1608-SN-Single color	137
WHE1608-SN-SPI	138
WHE1608-SN-DMX	139

COMPANY PROFILE

Blueview Elec-Optic Tech Co.,Ltd. is a pioneer developer in China's LED signage lighting and linear lighting market, not only participating but also promoting the development of the entire LED industry.

Blueview has been offering professional integrated and ingenious solutions with abundant products including signage, lighting products and others since 2004.

To lead the innovation trend, Blueview introduced “Smart Control” to its products which triggered a major breakthrough for the whole LED industry. Blueview aims to provide customers with complete LED smart lighting system solutions, from lamps to systems to IOT, everything.

We always pursuit the faith that Better light could bring Better life and we never slow down the path for innovation&creation.



CULTURE&VALUES

- Perfectionism.
- We always treat every detail with rigorous and severe attitude.
- Consumer Satisfaction.
- We always provide customization and circumspect lighting solution services for each individual project.
- Innovation.
- We always challenge ourselves and exploit new path to “Blue Sea”.
- High Performance Cost Ratio.
- We always require our products possessed with remarkable performance and reasonable cost.

STRENGTH

- Meticulous Quality Control system.
- High reputation around the world.
- Seasoned and professional project experiences .
- Persistent Research&Development.

MISSIONS

- Lead the development for LED industry while shouldering the social responsibilities.
- Bring the maximum profits to our consumers while maintaining the highest level of lighting solution services.

COMPANY INTRODUCTION

 EMBRANCHMENT
50 directly affiliated offices in China, 19 branches.

 SCALE 50,000m²  PRODUCT LINES
LED Signage, LED Lightbox,
LED Smart Lighting System, LED Commercial Lighting.

 CERTIFICATES
UL, RoHS, CE, CB, UKCA, ErP, ENEC, BSCI, FCC, REACH,
TITLE 24, etc.

 MANAGEMENT SYSTEM
Acquired international management system certification of TÜV, ISO9001,
ISO1400, ISO45001, quality, environment, occupational health and safety.


 MARKET SHARE
Own the largest market shares for LED advertising signage lighting.

 EMPLOYEES 1,300+  SALES \$122 millions

 GLOBAL BUSINESS
Domestic: 55%
Overseas: 45%



PRODUCTION BASE IN

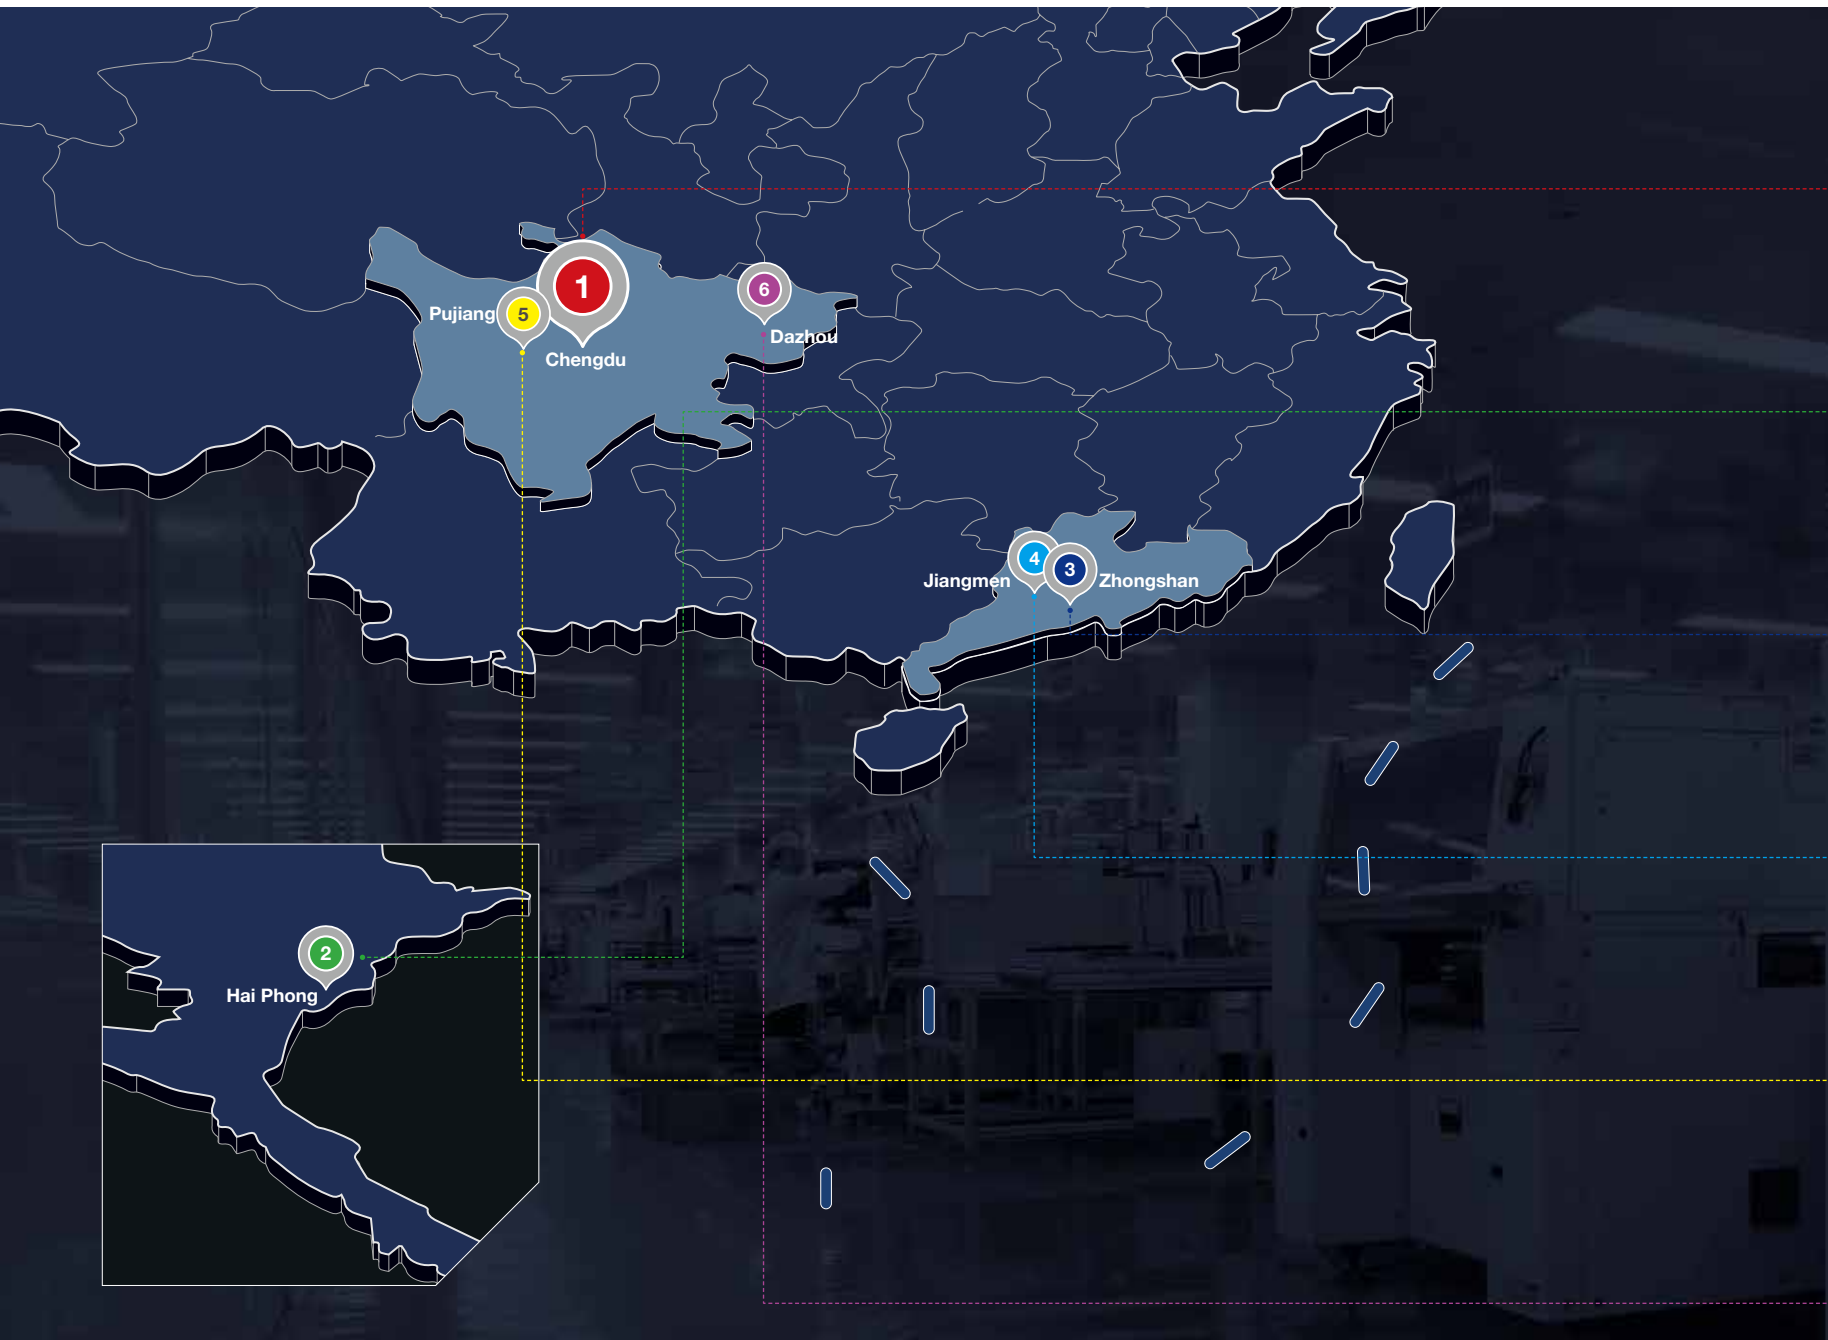

1 Chengdu, Sichuan



2 Hai Phong, Vietnam



3 Zhongshan, Guangdong



4 Jiangmen, Guangdong
40,000m² under construction



5 Pujiang, Sichuan



6 Dazhou, Sichuan





QUALITY CONTROL

Professional Quality Control
The management and QC team at Blueview Vietnam Factory come from Blueview headquarters in China, with strong management and quality control experience. They are familiar with current standards, ensuring effective execution of quality policies.



PRODUCTION LINE

PRODUCTION CAPACITY




PRODUCTION BASE IN HAI PHONG, VIETNAM

Blueview Vietnam Production Base was officially completed and started operation in August **2023**. It is the first oversea production base of Blueview. Located in Hai Phong, Vietnam's second-largest port city. Covering with **2700m²** workshop. **80+** sets of machines, professional management team from headquarters and over **160** skillful workers, we aim for consistent product quality and fast leading time for customer.



HISTORY & EVENTS

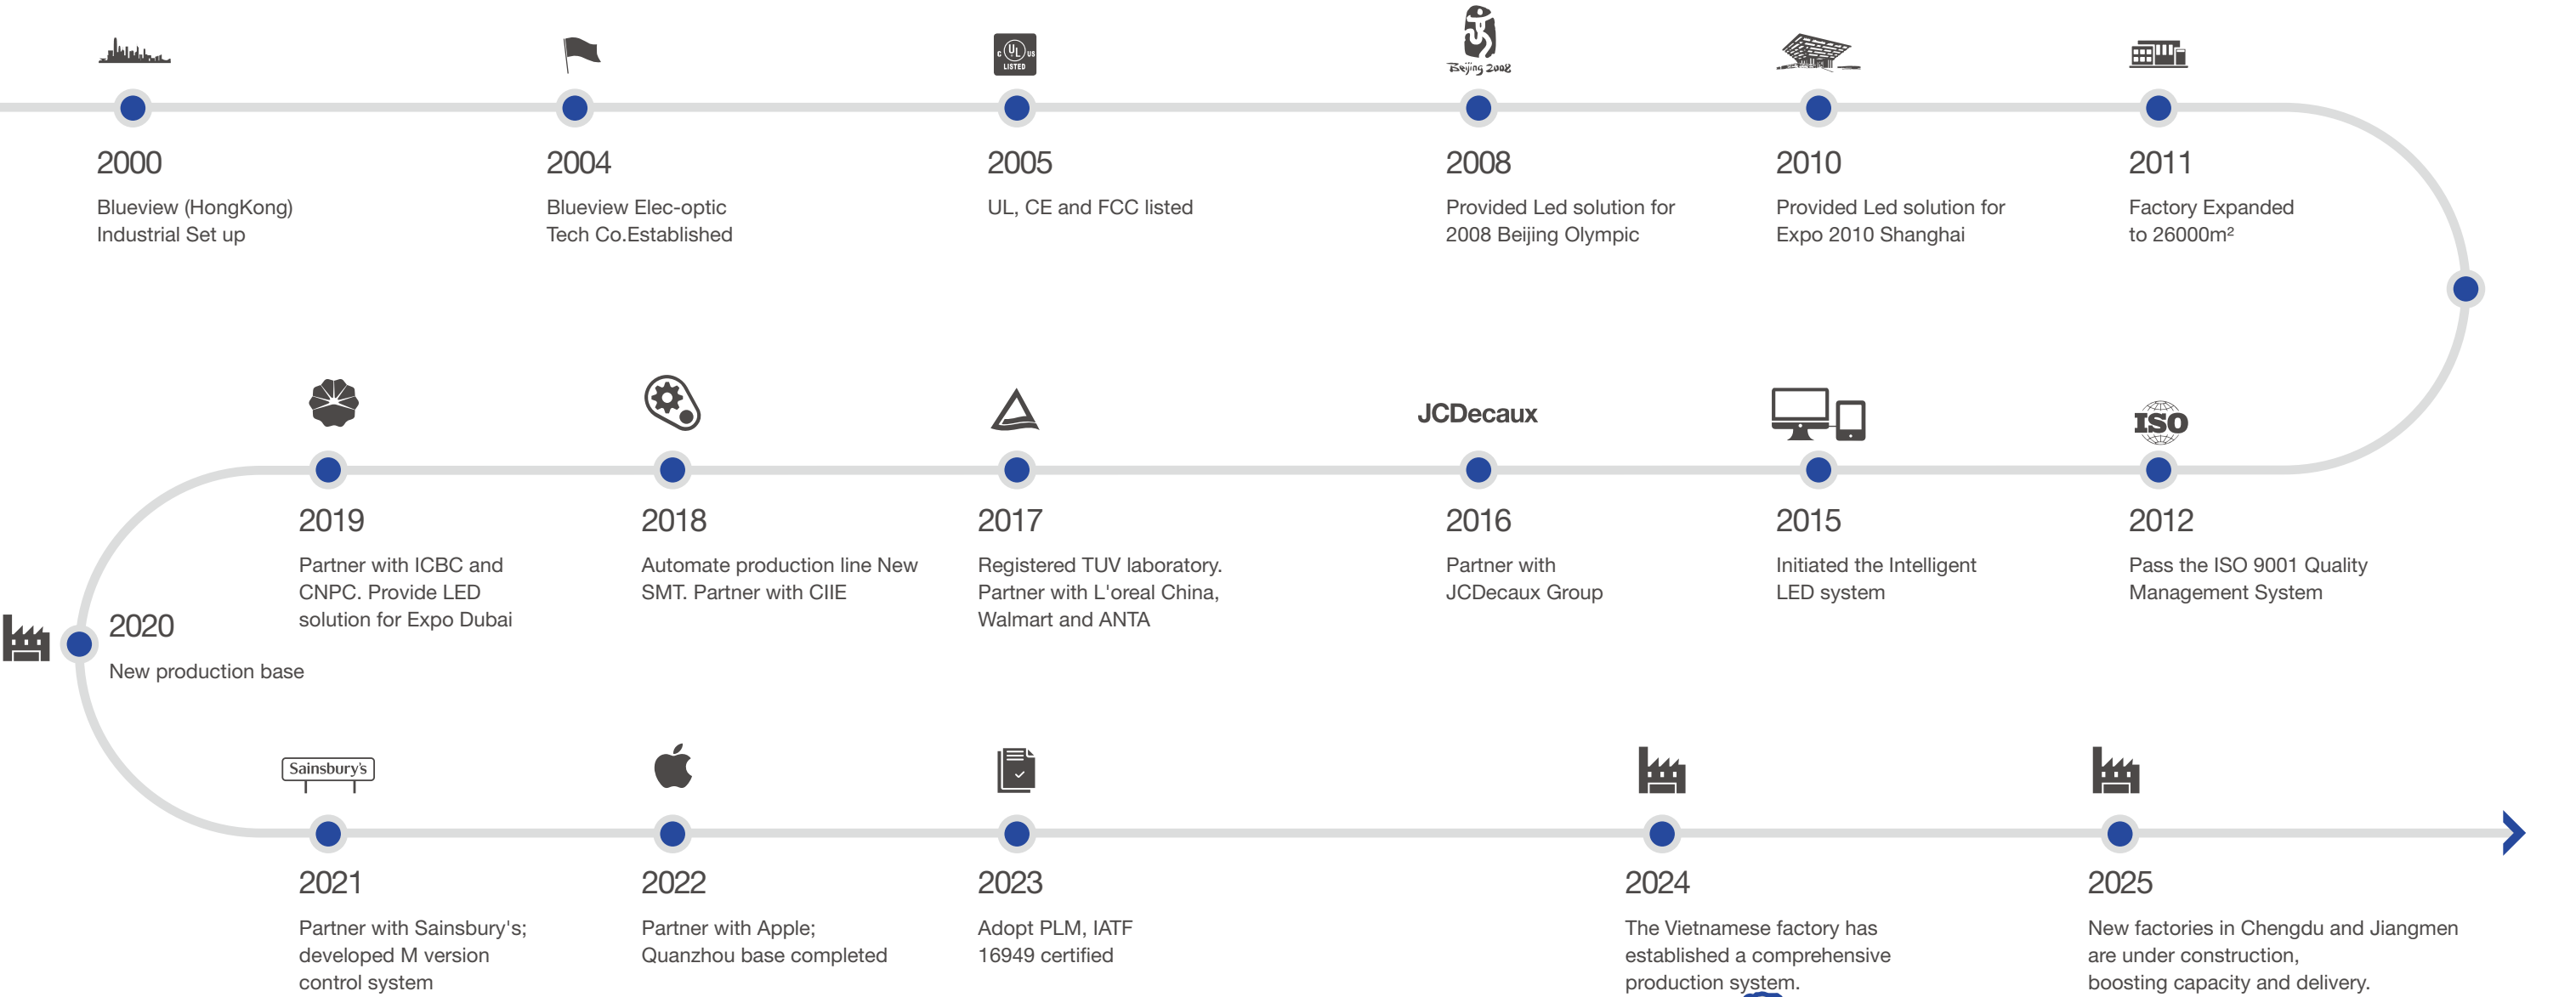

R&D INVESTMENT

76

R&D Engineers

5

Senior Engineers

Chengdu R&D Center

Developing the entire industry chain system, including smart systems and supporting devices.



Zhongshan R&D Center

Developing commercial lighting and LED linear lighting products



SGS AUTHORIZED FIRST-CLASS LABORATORY

It has a complete set of testing equipment, which can independently undertake products testings



ACOUSTICAL LABORATORY

Our Acoustic Testing Facility is designed to comply with ISO 354 standards. Our laboratory proudly carries accreditation from the China Inspection Body and Laboratory Mandatory Approva (CMA).

PATENT & CERTIFICATE



International Certificates
UL, ENEC, CE, CB, UKCA, BSCI, FCC, REACH, RoHS, ErP, TITLE 24, etc

MANAGEMENT SYSTEM

ISO 9001 QMS

ISO 14001 EMS

ISO 45001 OH&S

IATF 16949 Automotive Quality Management

ISO 14064 Greenhouse Gas

PAS 2060 Carbon-neutral

BSCI



LIGHT QUALITY


Healthy Lighting

LED white light consistency


The color consistency of LED lighting product is an important index for color quality, and color tolerance is significant reference standard to measure the index. Products from Blueview mainly adopt 3 step of color tolerance , pure light color and perfect consistency, which nearly cannot be recognized by human eyes on the subtle differences.

Color tolerance: one way to judge accuracy that human eye's on the vision discrepancy so as to distinguish the quality of similar color
To measure it by the size of ellipse, unit: step (SDCM): The smaller the ellipse is, the higher the accuracy will be.


Different steps ellipse diagram

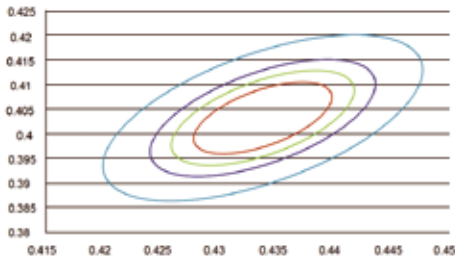

The C.I.E 1931 Chromaticity Diagram C.I.E 1931

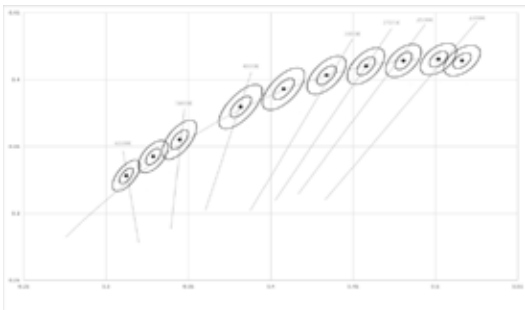

National standard: color tolerance ≤ 7 step (SDCM, step)
EU ERP instruction: color tolerance ≤ 6 step (SDCM, step)
Energy star ANSI: color tolerance ≤ 7 step (SDCM,step)
Color tolerance ≤ 3 step, Human eyes can barely recognize color differences
Color tolerance ≤ 5 step, Human eyes can recognize the subtle color difference.
Color tolerance ≤ 7 step, Human eyes can obviously recognize the color difference.

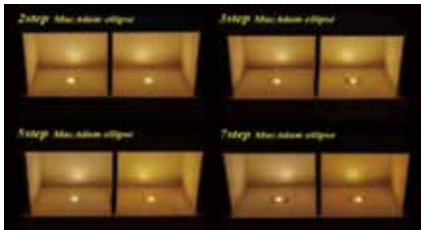

High CRI (Color rendering index)

CRI is an important method to evaluate lighting and also an important parameter to measure the color characteristics of artificial light source, Index: Ra/CR

Generally, higher CRI is more close to the color of the Sun light and the color of the object. The CRI products supplied by Blueview are usually more than 95 according to customers' requirements, which can really restore the color of the products in the lighting and thus stimulate the customers' shopping desire.



CRI>95



CRI>80



CRI<80

Ra &R9, R15

Ra is the average from R1 to R8.We should not only take attention on average Ra but also on the saturation red special R9 and the average Ra(9-12) of red, yellow, green, blue when design high CRI LED.We believe that these index really represent the quality of LED light source, and for prop commercial lighting light source, only when these index have a high value can ensure the high color rendering of LED.



R9 is rendering capability of red color. Higher value is more close to the original color. Simply to say, the higher R9 for the lighting products,the better effect and bright-colored will be shown on the fruit or flowers.




R15 is rendering capability to skin of Asian woman, higher R15 is more close to the original color of the skin. It's important in special counter lighting like cosmetic and clothing industry.

Harm of blue light


With the popularity of LED, the hazards or overflow of LED blue light has become a problem that all human beings must face and solve.

The harm of blue light is mainly reflected in the following aspects. First of all, it is easy to cause vision fatigue. Over time, it will cause vision loss. Secondly, it will cause irreversible damage to the eyes. Because the extremely high energy of harmful blue light can directly penetrate the lens to reach the retina, not only affecting vision, but also cause maculopathy and cataract, for the period of growth and development. Children's influence is more obvious

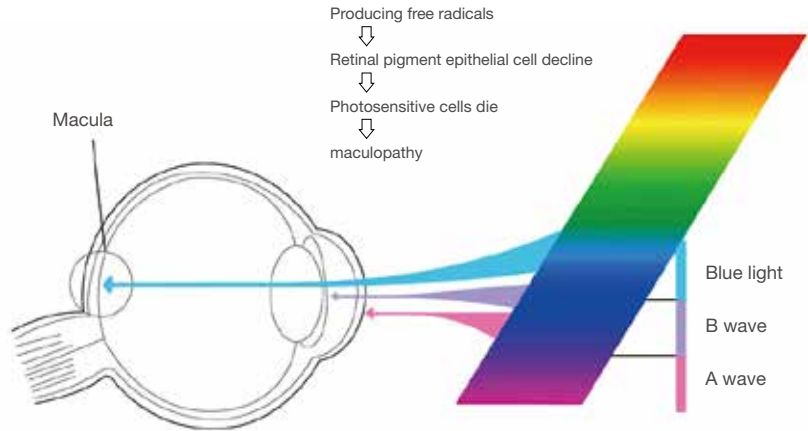


LED Full Spectrum

Blueview developed full spectrum products based on reducing the hazards of blue light. One typical feature is that it is the closest to sun light, and light spectrum continuity is good, high capability to restore the original color. The CRI is nearly to 100 (Ra>97, CRI>95, Rf>95, Rg>98)

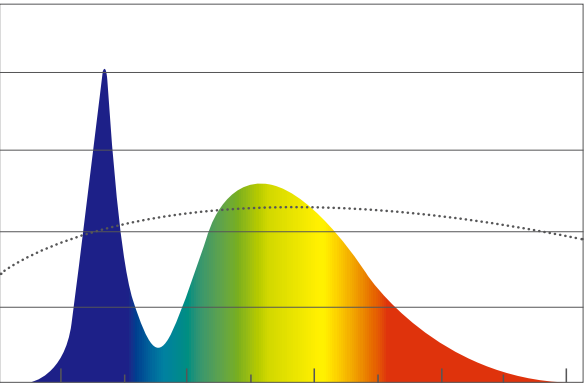

Normal LED spectrum

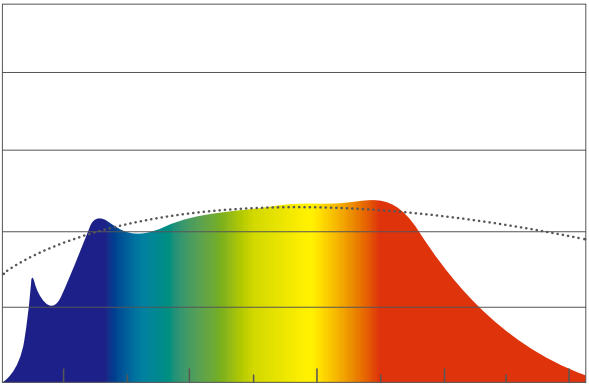


Sunlight spectrum

LED CHIPS OPTIONS

We use LED chips from multiple internationally recognized brands. By selecting high-quality components from trusted suppliers, we ensure stable performance, excellent color consistency, and long-term reliability across our products.This flexible chip selection also allows us to meet diverse application requirements and customer needs, delivering dependable lighting solutions for a wide range of projects.


THREE LAYERS WHITE PRINTED
PI POLYIMIDE FILM

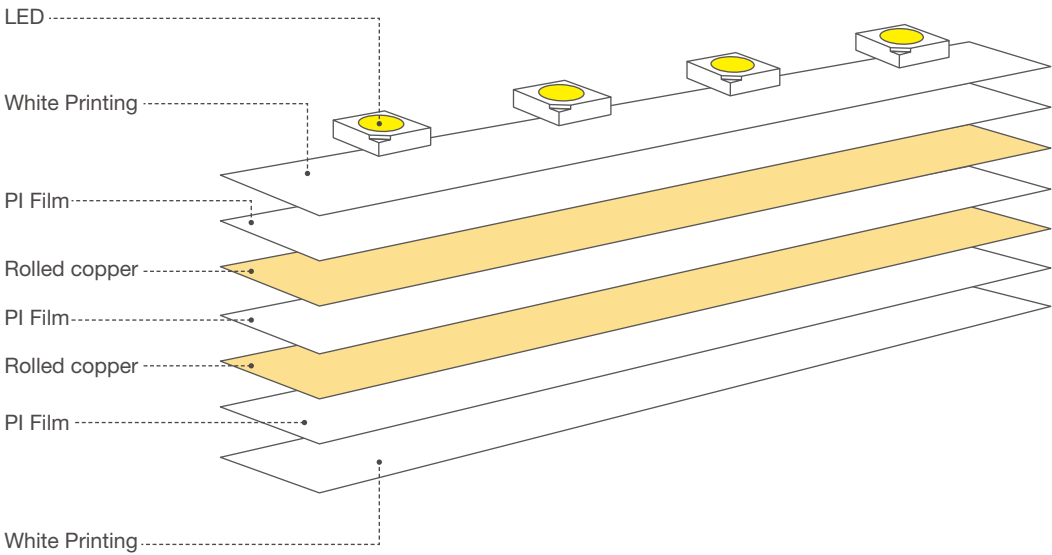


Blueview tape light structure as above diagram

PET film(polyethylene terephthalate),PI films max working temperature can reach to 200±5°C, which PET=50±5°C

PCB Width

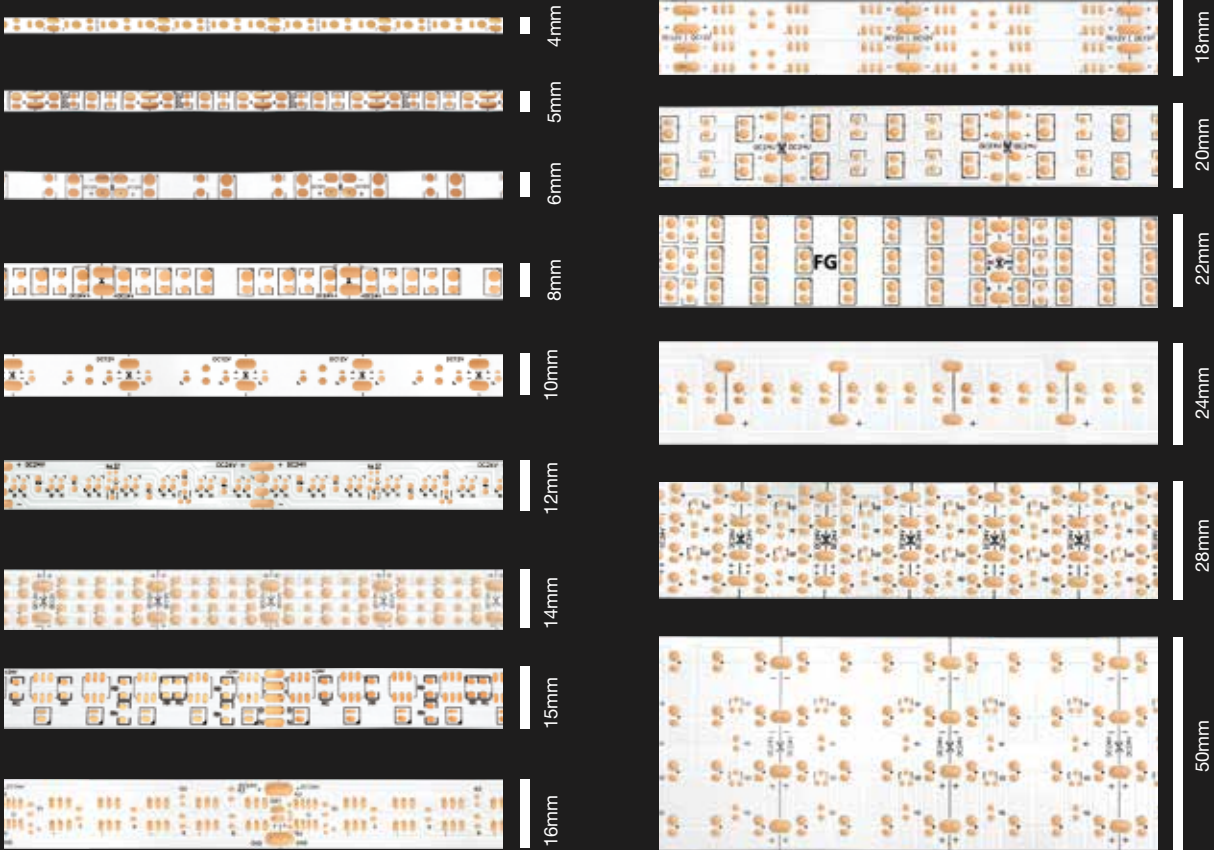

Color

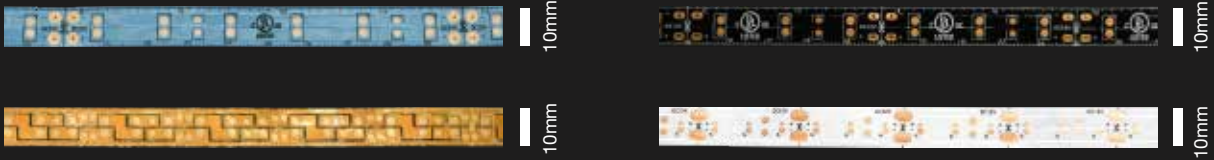

Printing



FACILITIES

Blueview has a full set of incoming material inspection, environmental test, measurement, and analytical equipment. Additionally, Blueview possesses an extensive range of advanced production equipment to ensure high-quality manufacturing and efficient processes.



Main Production Equipment List

SMT Machine	31	sets
Reflow soldering machine	9	sets
Extrusion machine	9	sets
Wire Bonding Machine	19	sets
Soldering Machine	32	sets
Solder Paste Printer	31	sets
PCB Separating machines	11	sets
Laser Marking Machine	26	sets
Laser Cutting Machine	2	sets
Industrial Robotic Arm	12	sets
Electric Blast Drying Box	11	sets
UV Oven	7	sets
Production line	42	sets
AOI	5	sets
Solder Paste Printer	31	sets
Capacitor Shaping Machine	4	sets
Laser Engraving Machine	2	sets
Auto Lens Mounter	13	sets
Tunnel Oven	4	sets
Glue Dispenser	24	sets
Ultrasonic Press Molding Machine	6	sets
Wave soldering machine	1	sets
Automatic Stencil Clean	1	sets
Offline 3D Solder Paste Inspection	2	set

Main Testing Equipment List

Coordinate Measuring Machine	1	set
Pressure Tester	1	set
Copper Foil Peel Strength Tester	1	set
Two-Dimensional Tester	1	set
Metallographic Microscope	1	set
Drop Test Machine	1	set
Vibration Test Bench	1	set
LCR Tester	1	set
Xenon Lamp Weather Test Box	1	set
Programmable High And Low Temperature Test Chamber	1	set
Tensile Testing Machine	1	set
RoHS Test System	1	set
Electronic Load Tester	1	set
Ground Resistance Tester	1	set
HAAS-2000 High Precision Fast Spectrum Tester	1	set
Safety Performance Tester	1	set
UV Weather Resistance Test Chamber	1	set
LED Signage Light Source Product Aging Line	75	sets
Light Color Electrical Test System	1	set
Goniophotometers System	1	set
ICT Test System	2	sets
X-RAY	1	set
DC Low Resistance Tester	1	set
Antistatic Tester	1	set
Spark Erosion Machine	1	set

GUARANTEED TO WORK



Twisting

Test Condition: Keep lighting and twist at

Test Time(or Cycles): 15000 cycles

Sample Length: 0.5m

Test Result: No cracking and other damage.



UV

Test Condition:
Test light temperature 60°C, ultraviolet wavelengths: 280 nm to 315 nm.4 hours of lighting, 4 hours of condensation or 8 hours of lighting, 4 hours of condensation as a cycle.

Test Time: 144 h

Sample Length: 0.5m

Test Result:
No color changing of samples, no deformation, no crack, and other damage.



Flammability


Test Condition: Vertical sample stops burning

Test Time: Within 30 seconds

Sample Length: 0.5m

Test Result:
The sample is extinguished immediately after it is removed from the flame.

Guaranteed To Work

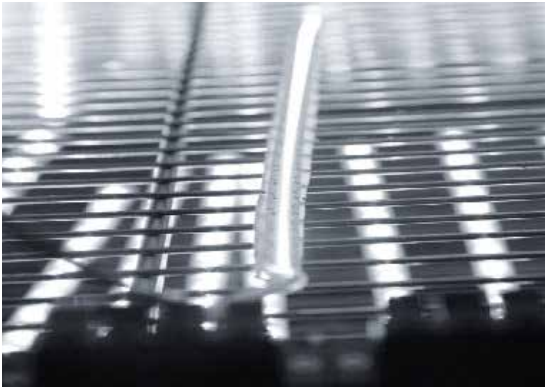

Temperature and Humidity

Test Condition:
High temperature 80°C/humidity 85% 4H, normal temperature 20°C 30 minutes/low temperature -40°C 4H, continuous cycle, and the rated operating voltage is switched once every 1 hour.

Test Time: 144 hours

Sample Length: 0.5m

Test Result: No dead light, no cracking, no embrittlement or other damage.



Temperature Cycling

Test Condition:
High temperature 60°C 4H, normal temperature 20°C 1H, and low temperature -40°C 4H. The rated operating voltage is switched once every 5 minutes.

Test Time: 144 hours

Sample Length: 0.5m

Test Result: No dead light, no cracking, no embrittlement or other damage.



Aging

Test Condition: Continuous lighting at room temperature.

Test Time: 144 hours

Sample Length: 0.5m

Test Result: The samples have no color change,no failure, no crack and other damage

PRODUCT LIST

TOP BENDING

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
NDF1617	24V DC	Single colorWNRGBRGBWPixel		Top: ∅120mm	5years 3years
NDF1617-DMX	24V DC	Single colorWNRGBRGBWPixel			
NDF1617L	24V DC	Single colorWNRGBRGBWPixel			
NDF1617-48V	48V DC	Single colorWNRGBRGBWPixel			
NDF1617A	24V DC	Single colorWNRGBRGBWPixel			
NDF1617H	24V DC	Single colorWNRGBRGBWPixel			
NDF1617-black	24V DC	Single colorWNRGBRGBWPixel		Top: ∅120mm	5years 3years
NDF1717SS	24V DC	Single colorWNRGBRGBWPixel		Top: ∅60mm	5years 3years
NDF1212	24V DC	Single colorWNRGBRGBWPixel		Top: ∅60mm	5years 3years
NDF1010	24V DC	Single colorWNRGBRGBWPixel		Top: ∅60mm	5years 3years
NDF1010-WN	24V DC	Single colorWNRGBRGBWPixel			
NDF1010-WN	24V DC	Single colorWNRGBRGBWPixel			
NDF1010	24V DC	Single colorWNRGBRGBWPixel			
NDF1010-RGB	24V DC	Single colorWNRGBRGBWPixel			
NDF1010A	24V DC	Single colorWNRGBRGBWPixel			
NDF1010-RGBW	24V DC	Single colorWNRGBRGBWPixel		Top: ∅30mm	5years 3years
NDF1005	24V DC	Single colorWNRGBRGBWPixel			
NDF1306-COB	24V DC	Single colorWNRGBRGBWPixel		Top: ∅60mm	5years 3years

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
NDF1306-COB	24V DC	Single colorWNRGBRGBWPixel		Top: ∅60mm	5years 3years
NDR2018	24V DC	Single colorWNRGBRGBWPixel		Top: ∅120mm	5years 3years
NDR2018-SPI		Single colorWNRGBRGBWPixel			
NDR1414	24V DC	Single colorWNRGBRGBWPixel		Top: ∅60mm	5years 3years
NDR0604-COB Plus	24V DC	Single colorWNRGBRGBWPixel		Top: ∅60mm	5years 3years
NDR1004-COB Plus	24V DC	Single colorWNRGBRGBWPixel		Top: ∅60mm	5years 3years

SIDE BENDING

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
NSF1617	24V DC	Single colorWNRGBRGBWPixel		Side: ∅120mm	5years 3years
NSF1617-Black	24V DC	Single colorWNRGBRGBWPixel			
NSF1617TS	24V DC	Single colorWNRGBRGBWPixel			
NSF1212	24V DC	Single colorWNRGBRGBWPixel		Side: ∅60mm	5years 3years
NSF1220	48V DC	Single colorWNRGBRGBWPixel		Side: ∅60mm	5years 3years
NSF1017	24V DC	Single colorWNRGBRGBWPixel		Side: ∅60mm	5years 3years
NSF1010	24V DC	Single colorWNRGBRGBWPixel		Side: ∅60mm	5years 3years
NSF1010A	24V DC	Single colorWNRGBRGBWPixel			5years 3years
NSF0612	12V DC	Single colorWNRGBRGBWPixel		Side: ∅30mm	5years 3years
NSF0410	24V DC	Single colorWNRGBRGBWPixel		Side: ∅25mm	5years 3years
NSF0309	24V DC	Single colorWNRGBRGBWPixel		Side: ∅60mm	5years 3years
NSF0306	24V DC	Single colorWNRGBRGBWPixel		Side: ∅60mm	5years 3years

SIDE BENDING

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
NSR1025	24V DC	☐ Single color ☒ WN ☒ RGB ☒ RGBW ☒ Pixel		Side: Ø60mm	🏠 5years 🏠 3years
NSR0817	24V DC	☒ Single color ☒ WN ☒ RGB ☐ RGBW ☐ Pixel		Side: Ø60mm	🏠 5years 🏠 3years
NSR0615	24V DC	☒ Single color ☒ WN ☐ RGB ☐ RGBW ☐ Pixel		Side: Ø30mm	🏠 5years 🏠 3years
NSR0512	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Side: Ø30mm	🏠 5years 🏠 3years
N2-4 pro	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Side: Ø60mm	🏠 5years 🏠 3years
N2-4 plus	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Side: Ø100mm	🏠 5years 🏠 3years

3D NEON

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
N2-8 Pro	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø200mm Side: Ø500mm	🏠 5years 🏠 3years
N2-8 Plus	24V DC	☒ Single color ☒ WN ☒ RGB ☐ RGBW ☐ Pixel		Top: Ø200mm Side: Ø300mm	🏠 5years 🏠 3years
		☒ Single color ☒ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø300mm Side: Ø800mm	🏠 5years 🏠 3years
NMF1616TS	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø500mm Side: Ø500mm	🏠 5years 🏠 3years
NMF1010	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø60mm Side: Ø150mm	🏠 5years 🏠 3years
NMF1617-W	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø120mm Side: Ø300mm	🏠 5years 🏠 3years

360° NEON

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
NCR32	24V DC	☒ Single color ☐ WN ☐ RGB ☒ RGBW ☒ Pixel		Ø 300mm	🏠 5years 🏠 3years
NCR23	24V DC	☒ Single color ☐ WN ☒ RGB ☐ RGBW ☐ Pixel		Ø 120mm	🏠 5years 🏠 3years
NCR23H	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Ø 120mm	🏠 5years 🏠 3years

360° NEON

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
NCR23A	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Ø 120mm	🏠 5years 🏠 3years
NCR23S	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Ø 200mm	🏠 5years 🏠 3years
NCR13-COB	24V DC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Ø 120mm	🏠 5years 🏠 3years

HIGH VOLTAGE SERIES

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
AN2-4	220V AC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Side: Ø30mm	🏠 5years 🏠 3years
AWHE1608-D	230V AC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø50mm	🏠 5years 🏠 3years
AWHE1707	120V AC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø120mm	🏠 5years 🏠 3years
ASN2-3	230V AC	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Side: Ø120mm	🏠 5years 🏠 3years

UNDERWATER NEON

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
UMF2020(L)	DC 24V	☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø200mm Side: Ø300mm	3years
UMF2020(H)		☒ Single color ☐ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø200mm Side: Ø300mm	
UMF2222-WN	DC 24V	☐ Single color ☒ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø200mm Side: Ø500mm	3years
UMF2222-RGB		☐ Single color ☐ WN ☒ RGB ☐ RGBW ☐ Pixel		Top: Ø300mm Side: Ø600mm	
UMF2222-RGBW		☐ Single color ☐ WN ☐ RGB ☒ RGBW ☐ Pixel		Top: Ø300mm Side: Ø800mm	
UMF2222-PTW-WN		☐ Single color ☒ WN ☐ RGB ☐ RGBW ☐ Pixel		Top: Ø200mm Side: Ø500mm	
UMF2222-SPI		☐ Single color ☐ WN ☐ RGB ☐ RGBW ☒ Pixel		Top: Ø300mm Side: Ø800mm	
UMF2222-DMX		☐ Single color ☐ WN ☐ RGB ☐ RGBW ☒ Pixel		Top: Ø300mm Side: Ø800mm	


FLEXIBLE WALL WASHER

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
P2-8	24V DC	Single colorWNRGBRGBWPixel		Side: Ø60mm	5years 3years
P2-8 Pro	24V DC	Single colorWNRGBRGBWPixel		Side: Ø60mm	5years 3years
WHE2014	24V DC	Single colorWNRGBRGBWPixel		Side: Ø30mm	5years 3years
SFO1616	24V DC	Single colorWNRGBRGBWPixel		Side: Ø30mm	5years 3years
SFO2317	24V DC	Single colorWNRGBRGBWPixel		Side: Ø60mm	5years 3years
MFO1611	24V DC	Single colorWNRGBRGBWPixel		Side: Ø100mm	5years 3years
MFO3525	24V DC	Single colorWNRGBRGBWPixel		Side: Ø60mm	5years 3years

SAUNA ROOM SERIES

Model	Voltage	Color	Drawing	Bending Diameter	Warranty
NSF1617-SN-Single color	24V DC	Single colorWNRGBRGBWPixel		Side: Ø120mm	5years 3years
NSF1617-SN-Multiple colors		Single colorWNRGBRGBWPixel			
NSF1617-SN-DMX		Single colorWNRGBRGBWPixel			
NDF1617-SN-Single color		Single colorWNRGBRGBWPixel			
NDF1617-SN-Multiple colors		Single colorWNRGBRGBWPixel			
NDF1617-SN-DMX		Single colorWNRGBRGBWPixel			
WHE1608-SN-Single color	24V DC	Single colorWNRGBRGBWPixel		Side: Ø60mm	5years 3years
WHE1608-SN-SPI/DMX		Single colorWNRGBRGBWPixel			

END CAP
IP PROCESS

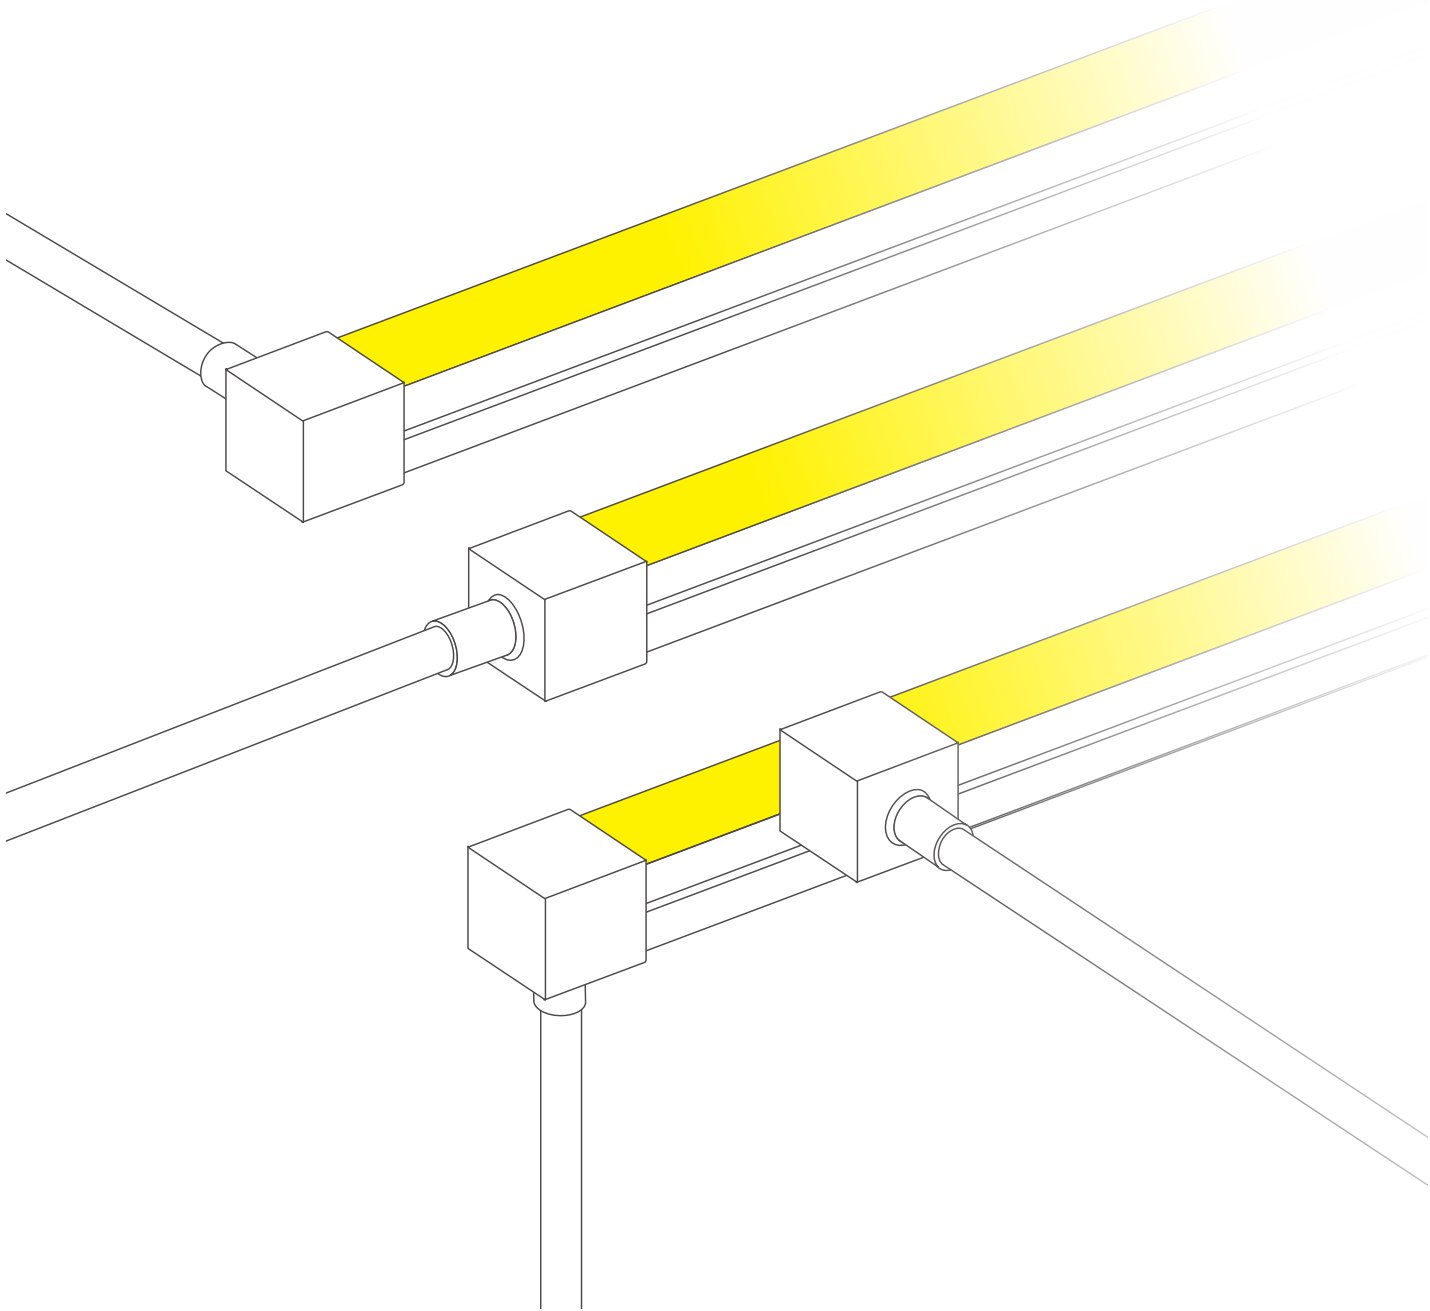

AWH1608-D

Glue Process (IP67)

Color	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐

Molding pressed (IP67)

Straight	Left	Right	Bottom
☐	☐	☐	☐

Molding pressed (IP68)

Straight	Left	Right	Bottom
☒	☐	☐	☐

AWH1707

Glue Process (IP65)

Color	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐

Molding pressed (IP67)

Straight	Left	Right	Bottom
☐	☐	☐	☐

Molding pressed (IP68)

Straight	Left	Right	Bottom
☐	☐	☐	☐

UNDERWATER NEON

UMF2020(L)

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐

UMF2020(H)

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
Single color	☒	☐	☐	☐

UMF2222-WN

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
WN	☒	☐	☐	☐

UMF2222-RGB

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
RGB	☒	☐	☐	☐

UMF2222-RGBW

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
RGBW	☒	☐	☐	☐

UMF2222-PTW-WN

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
WN	☒	☐	☐	☐

UMF2222-SPI / DMX

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
Pixel(RGBW)	☒	☐	☐	☐

FLEXIBLE WALL WASHER

P2-8

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒
WN	☒	☒	☒	☒
RGB	☒	☒	☒	☒
RGBW	☒	☒	☒	☒
Pixel(RGB)	☒	☒	☒	☒
Pixel(RGBW)	☒	☒	☒	☒

Molding pressed (IP67)

Straight	Left	Right	Bottom
☒	☐	☐	☒
☒	☐	☐	☒
☒	☐	☐	☒
☒	☐	☐	☒
☒	☐	☐	☒
☒	☐	☐	☒

Molding pressed (IP68)

Straight	Left	Right	Bottom
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐

P2-8

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒

Molding pressed (IP67)

Straight	Left	Right	Bottom
☒	☐	☐	☒

Molding pressed (IP68)

Straight	Left	Right	Bottom
☐	☐	☐	☐

WHE2014

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒

Molding pressed (IP67)

Straight	Left	Right	Bottom
☒	☐	☐	☒

Molding pressed (IP68)

Straight	Left	Right	Bottom
☐	☐	☐	☐

SFO1616

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒
RGB	☒	☒	☒	☒
WN	☒	☒	☒	☒

Molding pressed (IP67)

Straight	Left	Right	Bottom
☒	☒	☒	☒
☒	☒	☒	☒
☒	☒	☒	☒

Molding pressed (IP68)

Straight	Left	Right	Bottom
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐

SFO2317

Glue Process (IP68)

Color	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒
WN	☒	☒	☒	☒
RGB	☒	☒	☒	☒
RGBW	☒	☒	☒	☒
Pixel(RGB)	☒	☒	☒	☒
Pixel(RGBW)	☒	☒	☒	☒

Molding pressed (IP67)

Straight	Left	Right	Bottom
☐	☐	☐	☒
☐	☐	☐	☒
☐	☐	☐	☒
☐	☐	☐	☒
☐	☐	☐	☒
☐	☐	☐	☒

Molding pressed (IP68)

Straight	Left	Right	Bottom
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐

MFO1611

Glue Process (IP67)

Color	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒
Pixel(RGB)	☒	☒	☒	☒
Pixel(RGBW)	☒	☒	☒	☒

Molding pressed (IP67)

Straight	Left	Right	Bottom
☐	☐	☐	☒
☐	☐	☐	☒
☐	☐	☐	☒

Molding pressed (IP68)

Straight	Left	Right	Bottom
☐	☐	☐	☐
☐	☐	☐	☐
☐	☐	☐	☐

MFO3525

Glue Process (IP67)

Color	Straight	Left	Right	Bottom
Single color	☒	☒	☒	☒
Pixel(RGBW)	☒	☒	☒	☒

Molding pressed (IP67)

Straight	Left	Right	Bottom
☐	☐	☐	☐
☐	☐	☐	☐

Molding pressed (IP68)

Straight	Left	Right	Bottom
☐	☐	☐	☐
☐	☐	☐	☐

SAUNA ROOM SERIES

NSF1617-SN-Single color

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒

NSF1617-SN-Multiple colors

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
WN	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒
RGB	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒
RGBW	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒

NSF1617-SN-DMX

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Pixel(RGB)	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒

NDF1617-SN-Single color

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒

NDF1617-SN-Multiple colors

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
WN	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒
RGB	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒
RGBW	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒

NDF1617-SN-DMX

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Pixel(RGB)	☐	☐	☐	☐	☐	☐	☐	☐	☒	☒	☒	☒

WHE1608-SN-Single color

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Single color	☐	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐

WHE1608-SN-SPI


Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Pixel(RGB)	☐	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐

WHE1608-SN-DMX

Glue Process (IP67)					Molding pressed (IP67)				Molding pressed (IP68)			
Color	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom	Straight	Left	Right	Bottom
Pixel(RGB)	☐	☐	☐	☐	☐	☐	☐	☐	☒	☐	☐	☐

TOP BENDING NEON FLEX

Top-bending design with smooth continuous light, ideal for contour and decorative lighting.



NDF1617
D-SERIES



- Color options: Single color.
- Constant current design with stable and reliable performance.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617-Single color-CC	DC24V	>80	2300-6000K	1074	64.3	17.2	112pcs/m	62.5mm	10000*16*17mm
		\	Red	235	13.1				
		\	Green	687	38.2				
		\	Blue	148	8.2				
		\	Yellow	202	11.2				
		\	Orange	211	11.7				

Note: The data of 2300K-6000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS

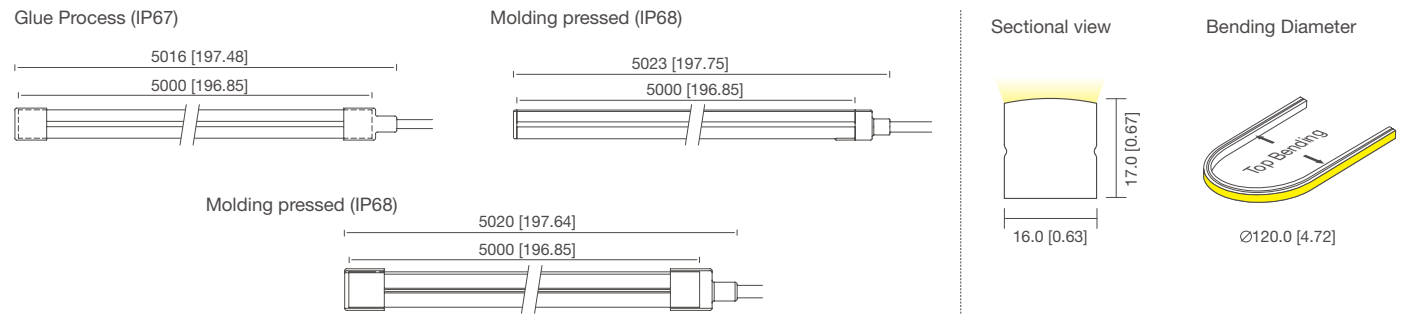

PHOTOMETRIC




Note: The data is the test result of NDF1617-Single color at 4000K. For other data, please consult sales rep.

NDF1617
D-SERIES



- Color options: RGB, RGBW.
- Constant voltage design with stable and reliable performance.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements

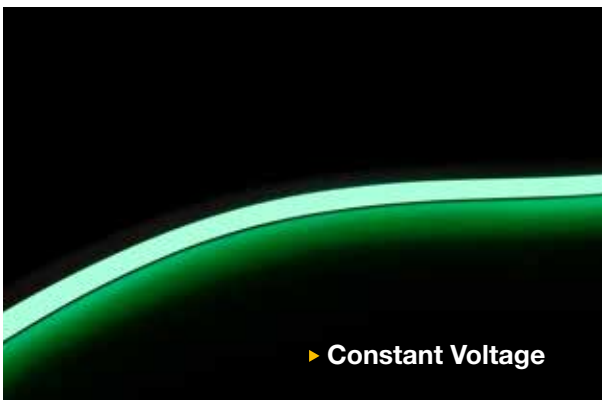


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617-RGB-CV	DC24V	\	Red	89	17.6	5.7	72pcs/m	83.3mm	5000*16*17mm
			Green	203	35	5.7			
			Blue	46	7.8	5.7			
			RGB	317	19	17.2			

Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

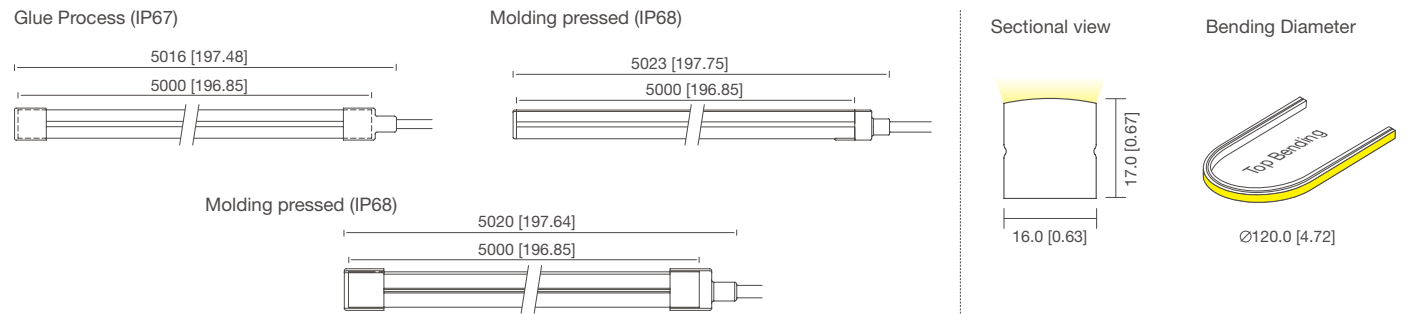

PHOTOMETRIC



Note: The data is the test result of NDF1617-RGB. For other data, please consult sales rep.

NDF1617-DMX
D-SERIES



- Color options: DMX-RGB, DMX-RGBW,DMX-WN.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617-DMX-RGB	DC24V	\	Red	48	7.2	6.72	60pcs/m	100mm	5000*16*17mm
			Green	110	15.8	6.72			
			Blue	25	3.5	6.72			
			RGB	178	12.6	15.36			



Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

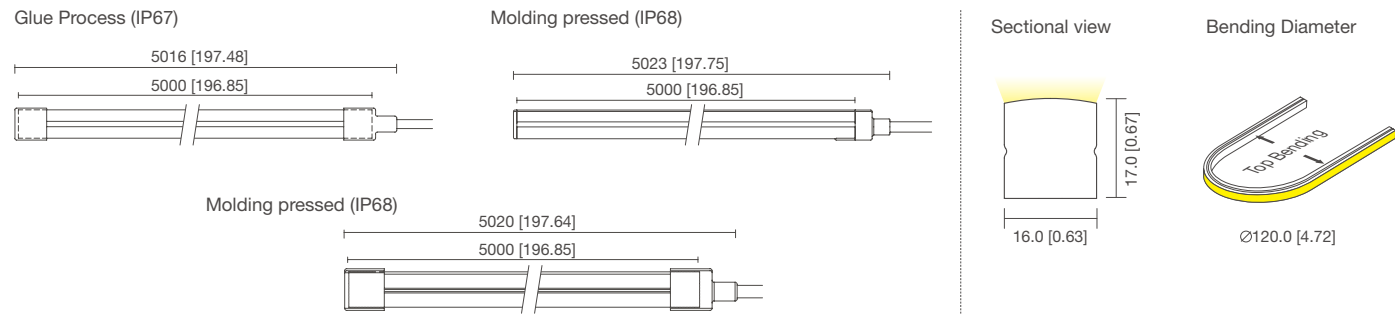

PHOTOMETRIC

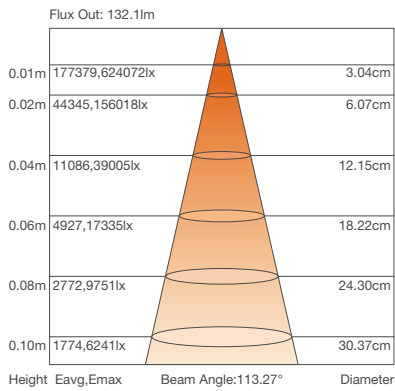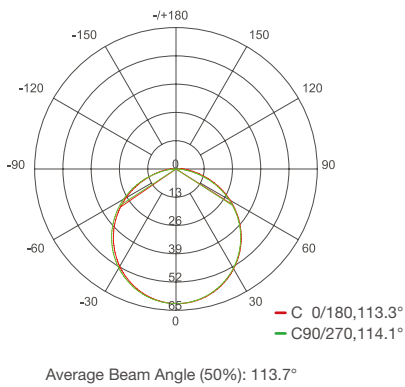

Note: The data is the test result of NDF1617-DMX-RGB. For other data, please consult sales rep.

NDF1617L
D-SERIES



- Color options: Single color.
- High voltage DC48V input.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617L-Single color	DC48V	>90	2700K	446	62	7.2	120pcs/m	100mm	50000*16*17mm
			3500K	460	64				
			4000K	475	66				
			5000K	460	64				
			6500K	468	65				



Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

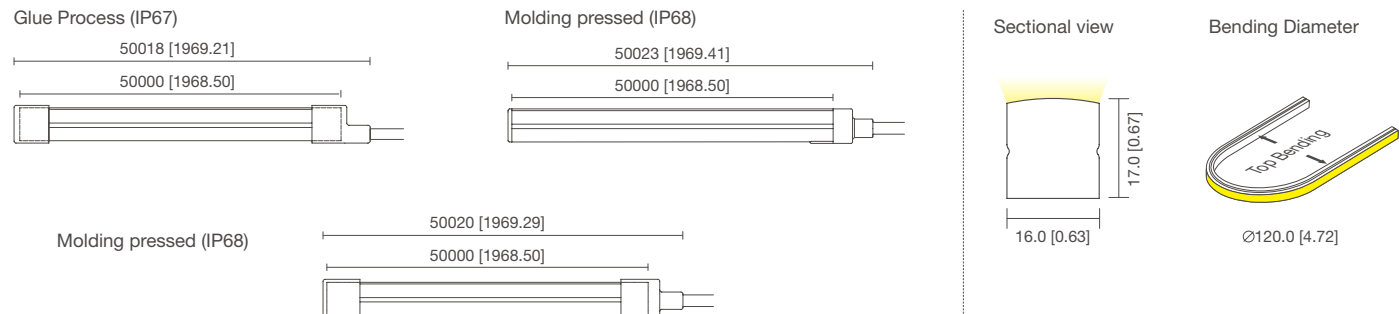

PHOTOMETRIC

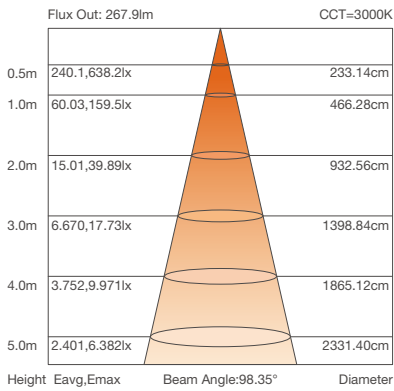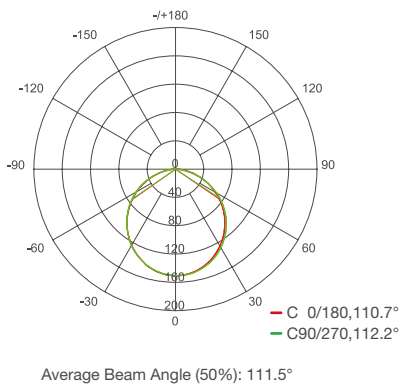

Note: the above two figures are tested with the sample NDF1617L-Single color, for other data, please consult sales rep.

NDF1617A
D-SERIES



- Color options: Single color
- Mini cut, can be cut into any specific size
- Support PWM, 0-10V, DALI dimming
- Warranty: 5 years indoor, 3 years outdoor


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617A-Single color	DC24V	>90	2500-6000K	544	46	11.76	140pcs/m	7.14mm	5000*16*17mm


Note: ☐ The data of 2500K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

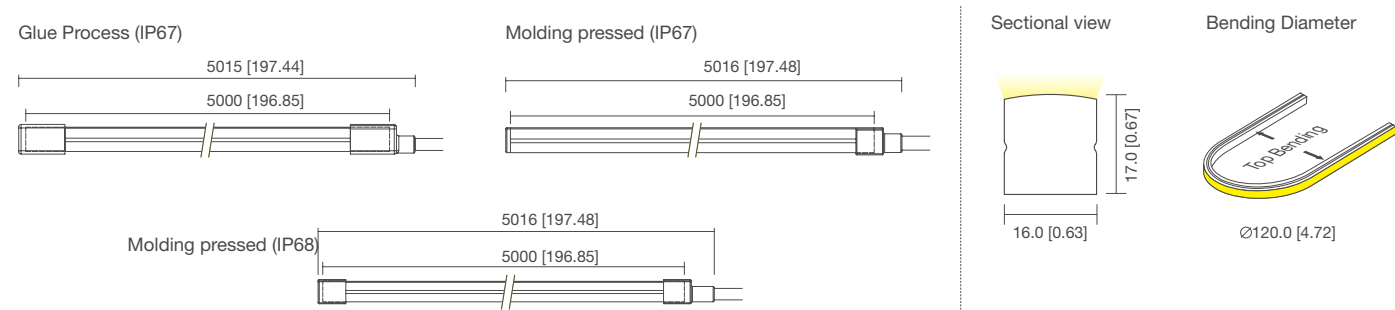


PHOTOMETRIC

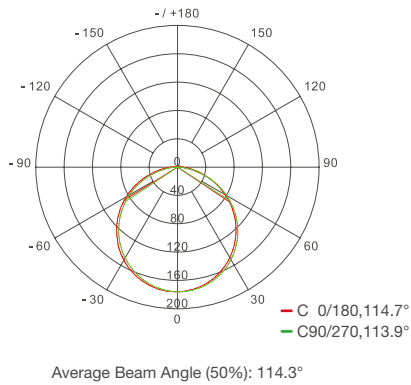

Note: The data is the test result of DF1617A-2700K. For other data, please consult sales rep.

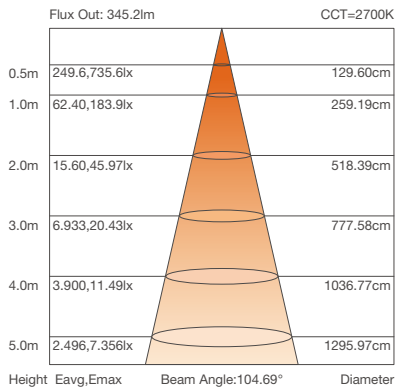

NDF1617H
D-SERIES

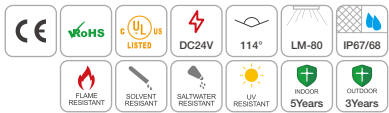

- Color options: Single color.
- High light efficiency.
- Tricolor silicone extrusion with clear cutting line marks.
- Support PWM dimming.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617H-Single color-CC	DC24V	>80	2700-6000K	1112	122	9.12	160pcs/m	50mm	10000*16*17mm


Note: ☐ The data of 2700K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617H-Single color-CV	DC24V	>80	3000-4000K	720	144	5	144pcs/m	62.5mm	5000*16*17mm


Note: ☐ The data of 3000K-4000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

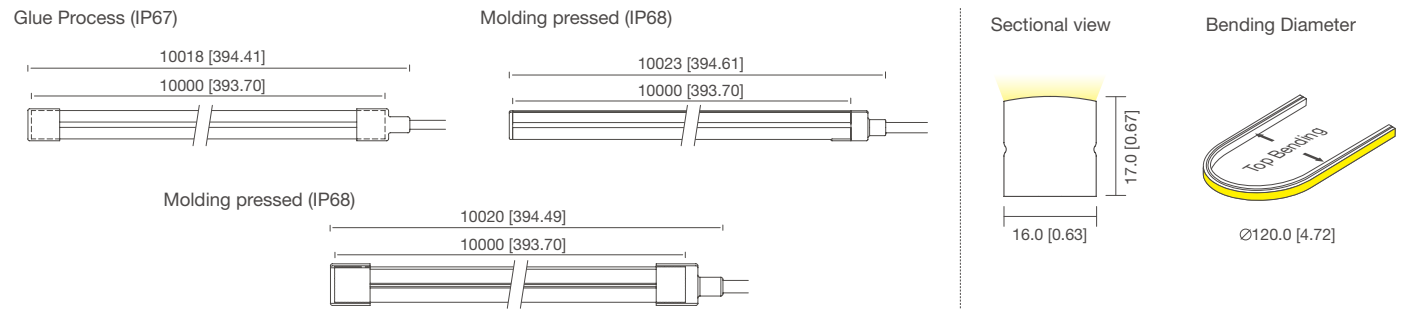

PHOTOMETRIC

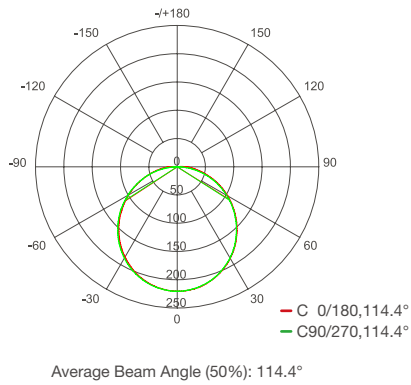


Note: The data is the test result of NDF1617H-CC. For other data, please consult sales rep.

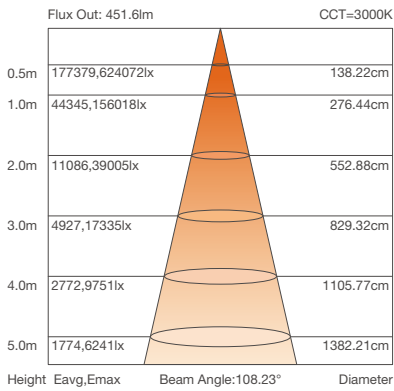

NDF1617-Black

D-SERIES



- Color options: Single color.
- Black lamp body, strong weather resistance.
- Tricolor silicone extrusion, adapt to various complex applications.
- 3 SDCM, good linear lighting effect, uniform lighting.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NDF1617-Black	DC24V	>90	2200K	176	10.2	17.28	140pcs/m	50mm	10000*16*17mm
			2400K	179	10.4				
			2700K	193	11.2				
			3000K	195	11.3				
			3500K	201	11.6				


Note: For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

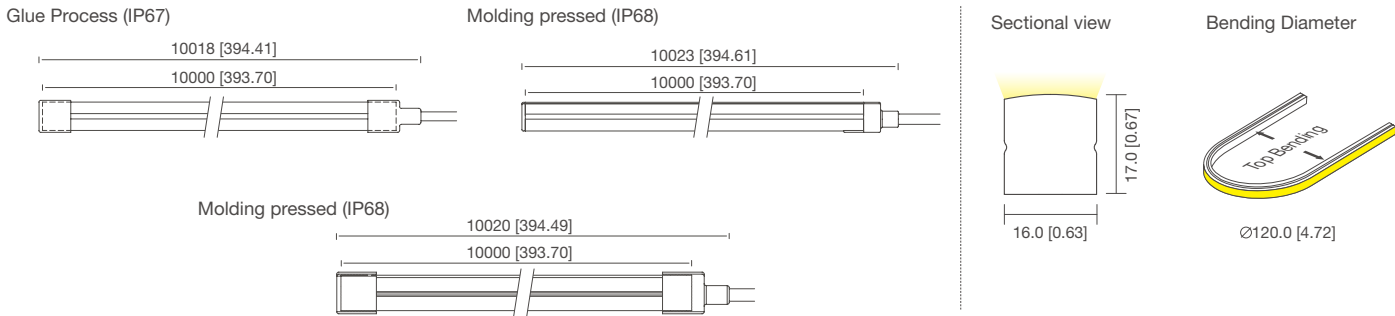

PHOTOMETRIC

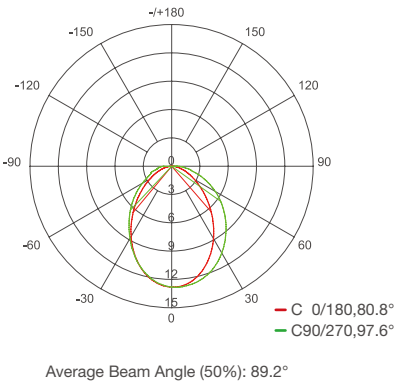


Note: The data is the test result of NDF1617-black. For other data, please consult sales rep.

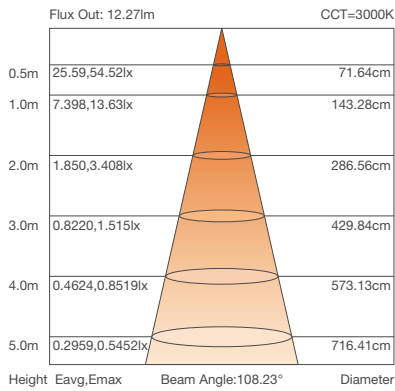

NDF1717SS

D-SERIES



- Color options: Single color, WN, RGBW, Pixel.
- Three-sided emitting, uniform light, no light spots.
- Superior design with exquisite craftsmanship ensure stable performance.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Multiple spec options, support customization.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NDF1717SS-Single color	DC24V	>90	4000K	1690	97	17.28	140pcs/m	50mm	10000*16.5*16.5mm
NDF1717SS-WN	DC24V	>90	2400K	621	86	7.2	240pcs/m	50mm	10000*16.5*16.5mm
			6000K	611	84	7.2			
			W+N	1229	85	14.4			

Note: For more information, please contact our sales representative.



PROFILE DRAWINGS

Unit:mm/inch

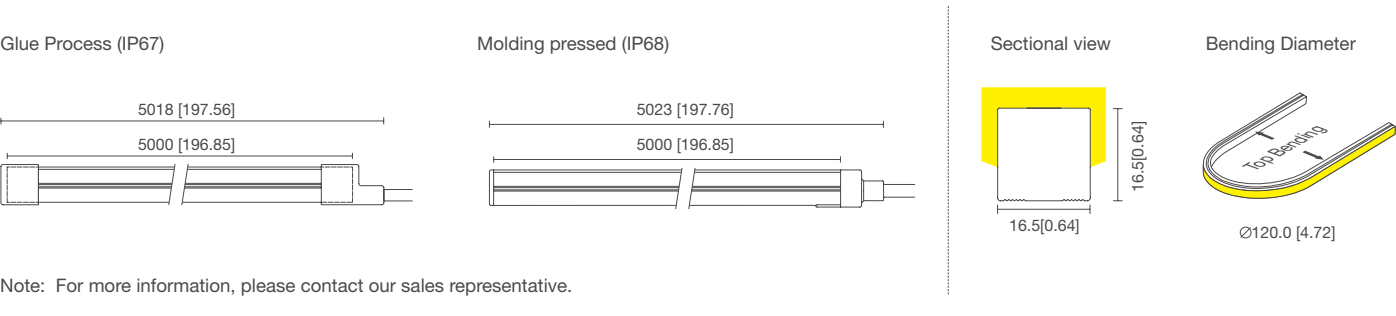

Note: For more information, please contact our sales representative.

PHOTOMETRIC

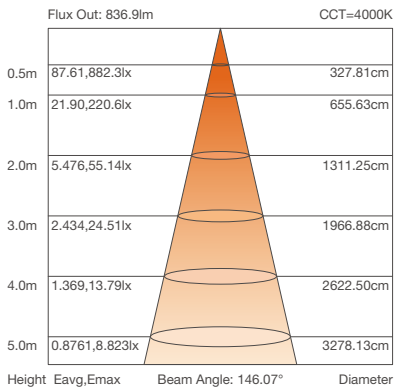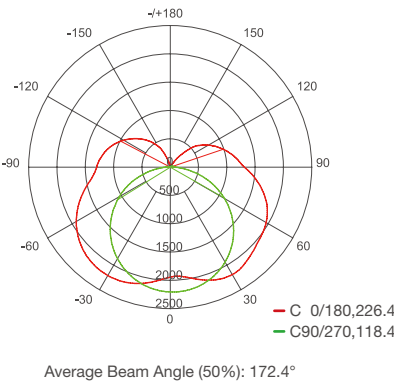

Note: the above two figures are tested with the sample NDF1717SS-W, for other data, please consult sales rep.

NDF1212
D-SERIES



- Color options: Single color, WN and RGB.
- Design: Superior design with exquisite craftsmanship ensure stable and reliable performance.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.





OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1212-Single color	DC24V	>80	2300-6000K	734	62.8	11.5	144pcs/m	41.66mm	15000*12.5*12mm
		\	Red	260	22.3				
		\	Green	758	65.0				
		\	Blue	154	13.2				
		\	Yellow	184	16.0				
		\	Orange	304	26.1				
		\							



Note: The data of 2300K-6000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

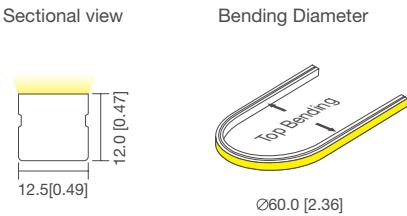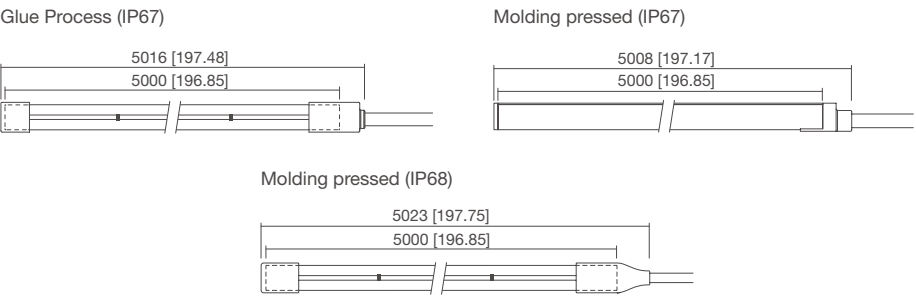


PHOTOMETRIC

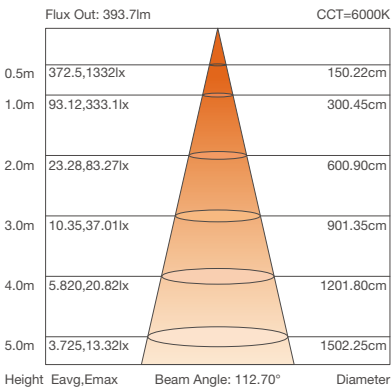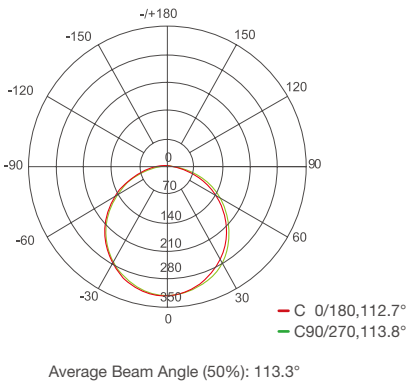

Note: the above two figures are tested with the sample NDF1212-WN at CCT 6000K.

NDF1010
D-SERIES

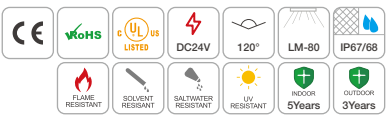

- Color options: Single color
- Good linear effect and better environmental adaptability
- Top bending with good flexibility
- A variety of specifications are available,support customization
- Max. 5m with one end power feeding; Max. 10m with two ends power feeding
- Warranty: 5 years indoors, 3 years outdoors
- Single color supports PWM, 0-10V, DALI dimming





OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1010-Single color	DC24V	>90	2300-6000K	556	71	8	120pcs/m	50mm	5000*10*10mm
		\	Red	186	24				
		\	Green	635	70				
		\	Blue	116	15				
		\	Yellow	132	18				
		\	Orange	200	28				
		\							



Note: The data of 2300K-6000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

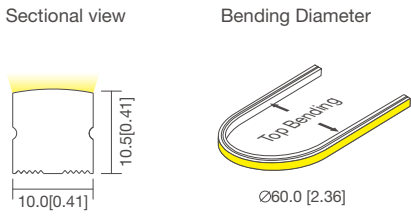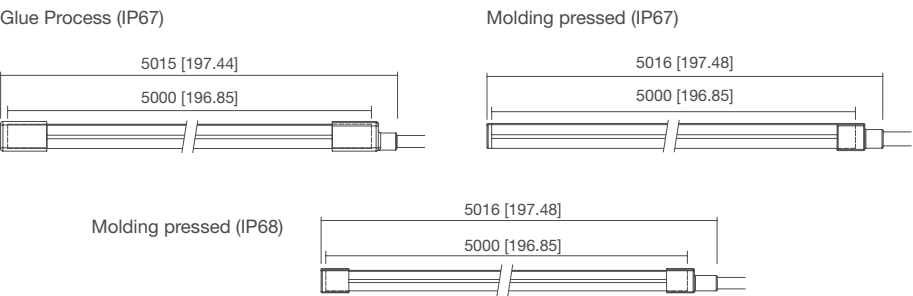


PHOTOMETRIC

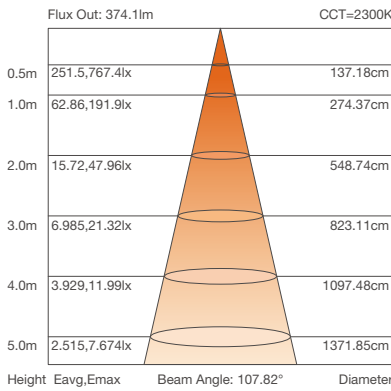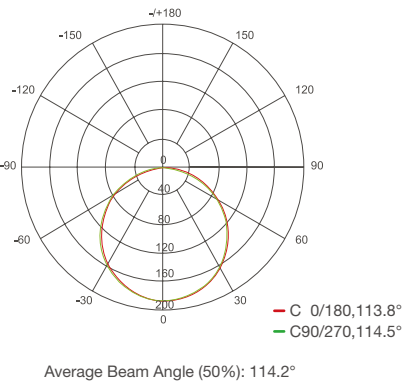

Note: above data tested with NDF1010-single color at 2300K , for other data,please consult sales rep.

NDF1010-WN
D-SERIES



- Color options: WN
- Good linear effect and better environmental adaptability
- Top bending with good flexibility
- A variety of specifications are available,support customization
- Max. 5m with one end power feeding; Max. 10m with two ends power feeding
- Warranty: 5 years indoors, 3 years outdoors


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1010-WN	DC24V	>90	● 2700K	374	52	7.2	288pcs/m	41.67mm	5000*10*10mm
		>90	○ 6000K	410	57	7.2			
		\	● W+N	777	54	14.4			



Note: □ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch


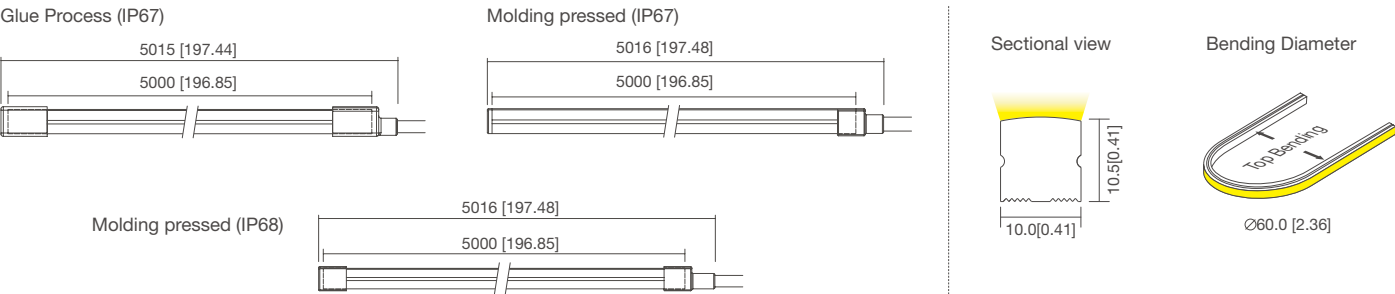


PHOTOMETRIC

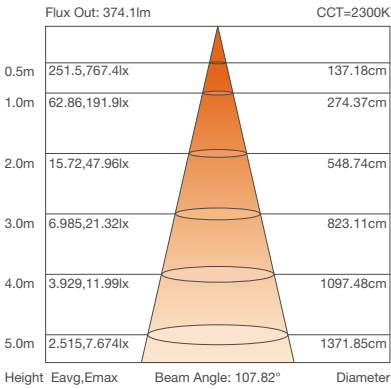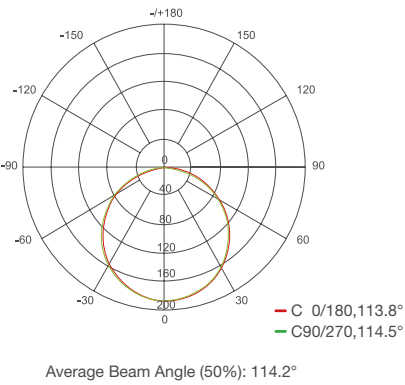

Note: above data tested with NDF1010-single color at 2300K , for other data,please consult sales rep.

NDF1010-RGB
D-SERIES

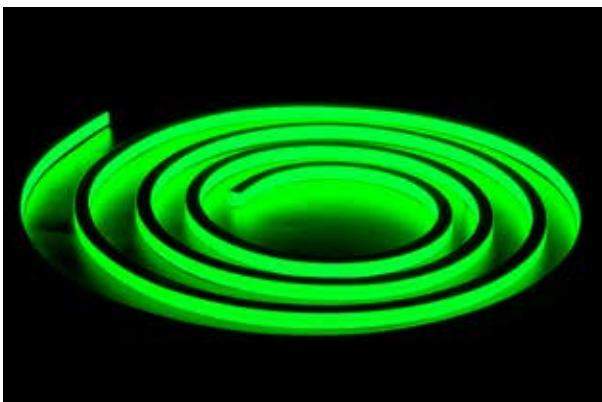

- Color options: RGB
- Good linear effect and better environmental adaptability
- Top bending with good flexibility
- A variety of specifications are available,support customization
- Max. 5m with one end power feeding; Max. 10m with two ends power feeding
- Warranty: 5 years indoors, 3 years outdoors

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1010-RGB	DC24V	\	● Red	57	18	3.2	156pcs/m	38.46mm	5000*16*17mm
			● Green	214	67	3.2			
			● Blue	41	13	3.2			
			● RGB	316	33	9.6			


Note: □ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch



NDF1010-RGBW
D-SERIES



- Color options: RGBW
- Good linear effect and better environmental adaptability
- Top bending with good flexibility
- A variety of specifications are available,support customization
- Max. 5m with one end power feeding; Max. 10m with two ends power feeding
- Warranty: 5 years indoors, 3 years outdoors


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1010-RGBW	DC24V	\	4000K	220	51	4.32	144pcs/m	41.67mm	5000*16*17mm
			Red	82	19	4.32			
			Green	250	58	4.32			
			Blue	51	12	4.32			
			RGBW	587	34	17.28			


Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

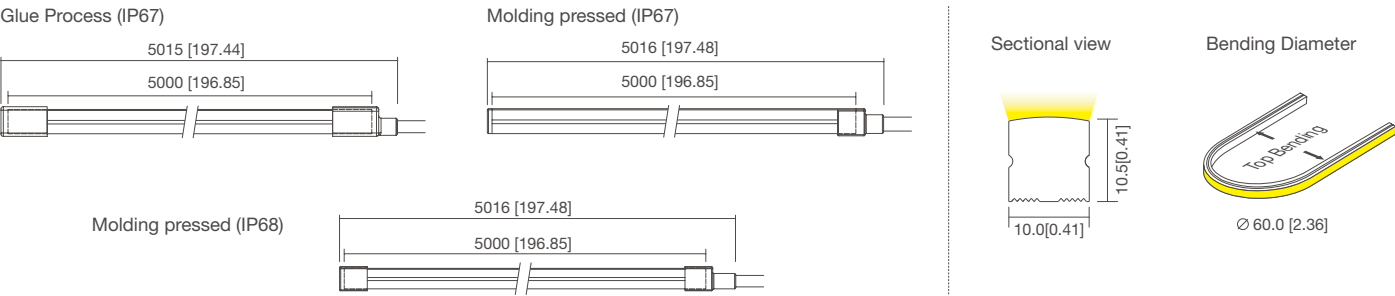

NDF1010A
D-SERIES

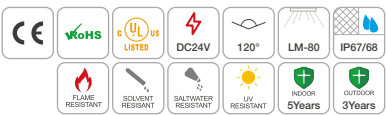

- Color options: Single color
- Mini size neon, top bending with good flexibility
- Short cut, can be cut into any specific size
- Support PWM, 0-10V, DALI dimming
- Warranty: 5 years indoor, 3 years outdoor


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1010A-Single color	DC24V	>90	2500K	440	55	8.0	140pcs/m	7.14mm	5000*10*10mm
			2700K	458	57				
			3500K	461	57				
			4000K	473	59				
			5000K	488	61				
			6500K	482	60				

Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

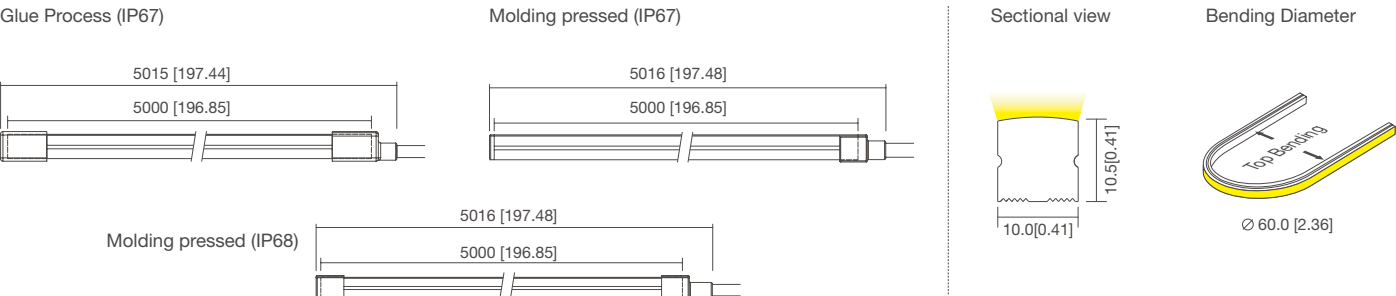

PHOTOMETRIC



Note: The data is the test result of NDF1010A-6500K. For other data, please consult sales rep.

NDF1005
D-SERIES



- Color options: Single color.
- Superior design with exquisite craftsmanship ensure stable and reliable performance.
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI dimming.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1005-Single color	DC24V	>90	2200-6000K	470	63	7.2	336pcs/m	20.83mm	5000*10*4.8mm
		\	Red	45	6				
		\	Green	510	71				
		\	Blue	98	13				
		\	Yellow	48	6				
		\	Orange	40	5				
		\							


☐ The data of 2200K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

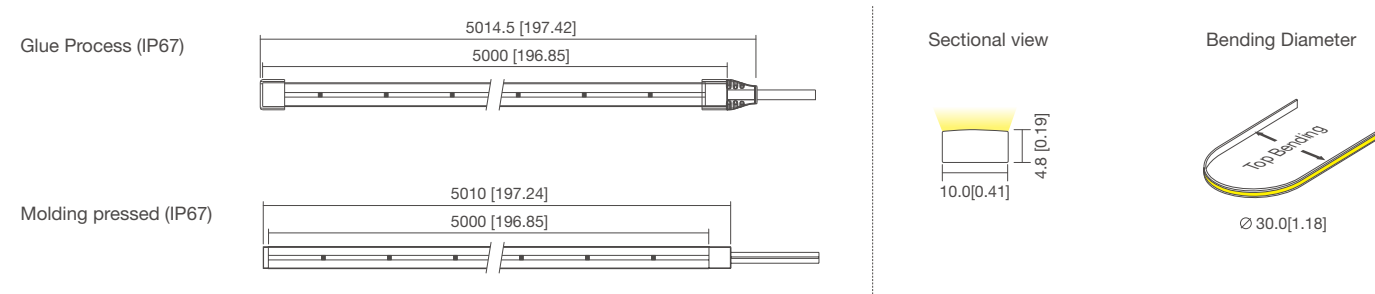


PHOTOMETRIC

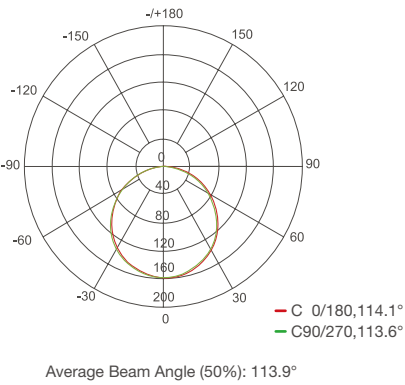


Note: Above data are tested at NDF1005-4000K, for other date, please consult sales rep.

NDF1306-COB
D-SERIES



- Color options: Single color, WN,RGB.
- Linear illumination, good environmental adaptability.
- Top bending and suitable for curved mounting surface.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

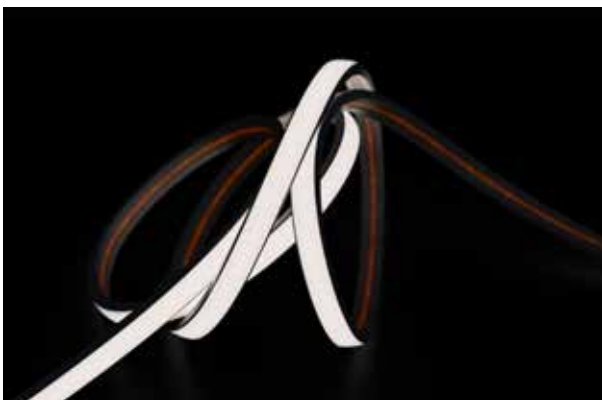


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1306-COB-Single color	DC24V	>90	2300-6000K	507	51	10	320pcs/m	50mm	5000*13*6mm
		\	Red	54	5				
		\	Green	428	43				
		\	Blue	67	7				
		\	Yellow	285	28				
		\							


☐ The data of 2300K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

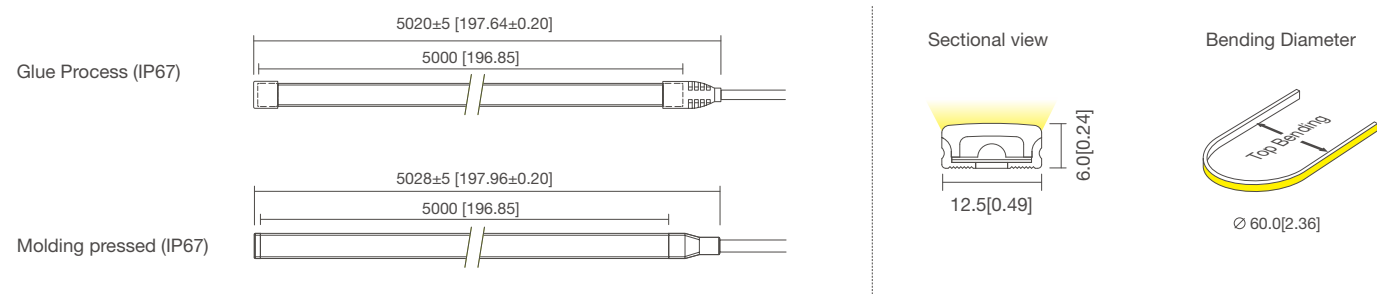


PHOTOMETRIC

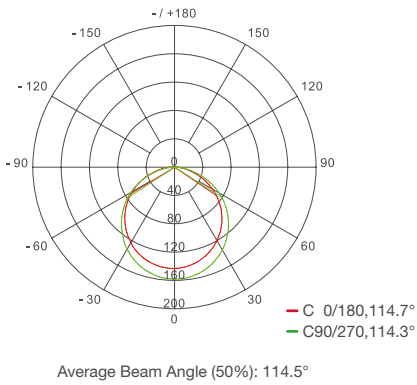

Note: The data is the test result of NDF1306-COB-2700K. For other data, please consult sales rep.

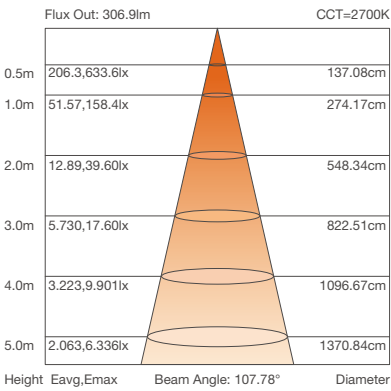

NDR2018
D-SERIES

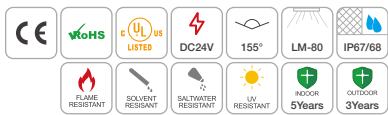

- Color options: Single color, WN, RGB, RGBW and Pixel
- Single color support PWM, 0~10V, DALI dimming
- Top bending with good flexibility
- Silicone integrated extrusion shaping process with good weather resistance
- Warranty: 5 years indoor, 3 years outdoor
- Customization: multiple spec options, can be customized upon requirements





OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDR2018-Single color	DC24V	>90	2200-6500K	1469	91.7	15.3	96pcs/m	62.5mm	5000*20*18mm
		\	Red	290	19.3				
		\	Green	929	61.7				
		\	Blue	224	14.9				
		\	Yellow	332	22.1				
		\	Orange	129	8.6				
		\							


Note: The data of 2200K-6500K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

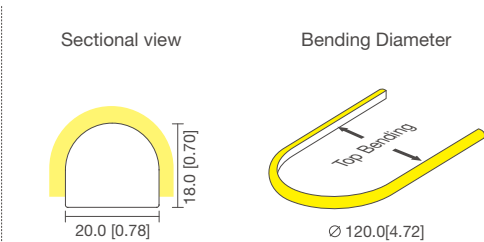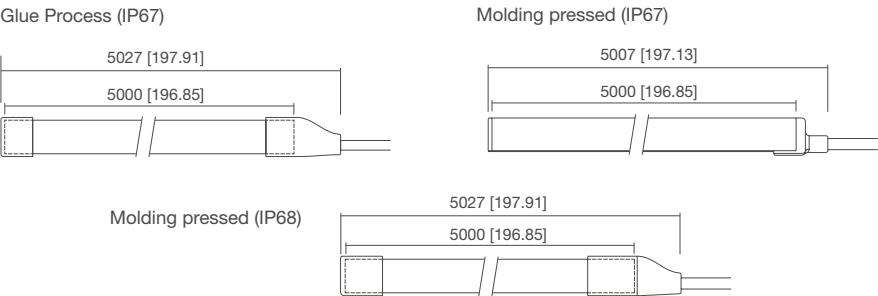

PHOTOMETRIC

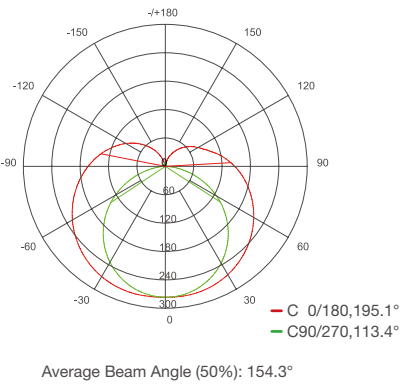

Note: the above data is based on NDR2018 at 2700K. For other data, please consult sales rep.

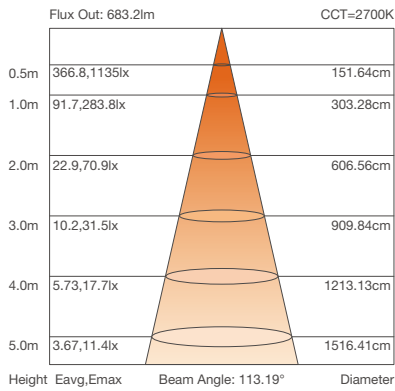

NDR2018-SPI
D-SERIES



- Color options: W, RGB, RGBWN.
- SPI control.
- Top bending with good flexibility.
- Silicone integrated extrusion shaping process with good weather resistance.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.





OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDR2018-SPI- RGBWN	DC24V	>80	2200K	320	73	4.38	216pcs/m	83.3mm	5000*20*18mm
		>80	6500K	373	85	4.38			
		\	Red	88	20	4.38			
		\	Green	245	56	4.38			
		\	Blue	55	12	4.38			
		\	RGBWN	1060	51	20.5			
		\							


Note: For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

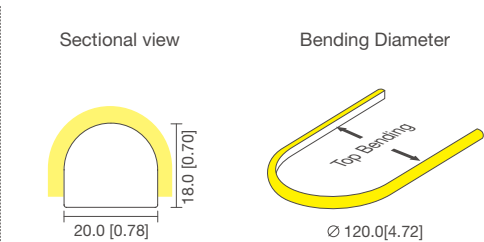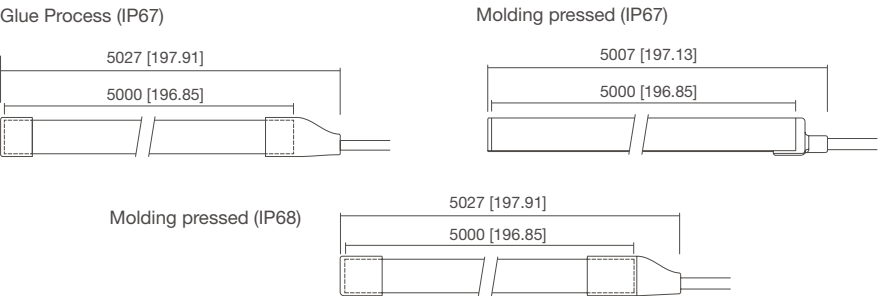

PHOTOMETRIC

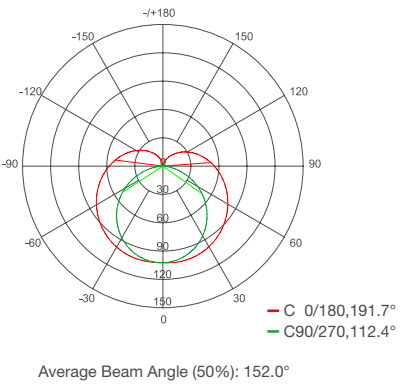

Note: the above data is based on NDR2018-SPI-RGB. For other data, please consult sales rep.

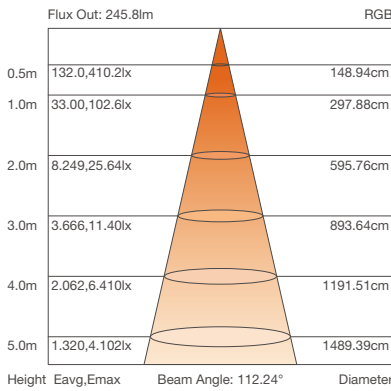

NDR1414
D-SERIES



- Color options: Single color, WN and RGB.
- Adopt constant current components with stable and reliable performance.
- Top bending with good flexibility.
- Silicone integrated extrusion, good weather resistance .
- Warranty: 5 years indoor, 3 years outdoor .
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDR1414-Single color	DC24V	>90	2300-6000K	733	62.8	11.5	144pcs/m	41.66mm	15000*14*14mm
		\	Red	272	23.4				
		\	Green	773	66.8				
		\	Blue	158	13.6				
		\	Yellow	195	16.9				
		\	Orange	334	28.8				



Note: The data of 2300K-6000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

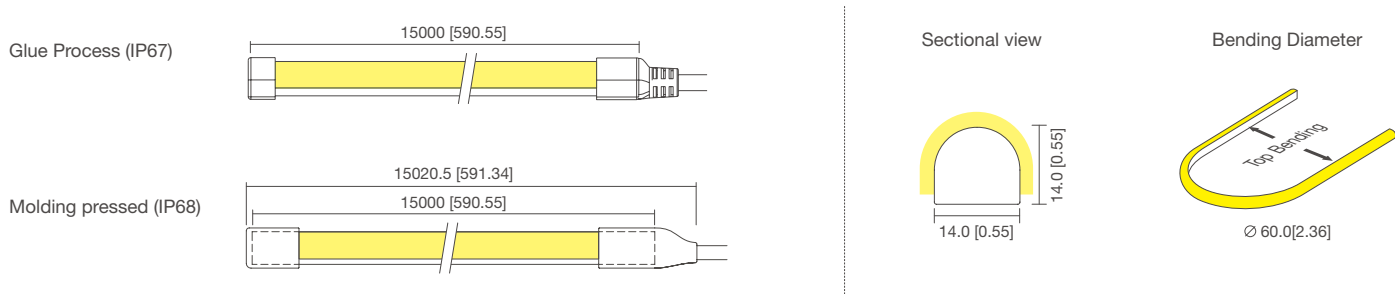


PHOTOMETRIC

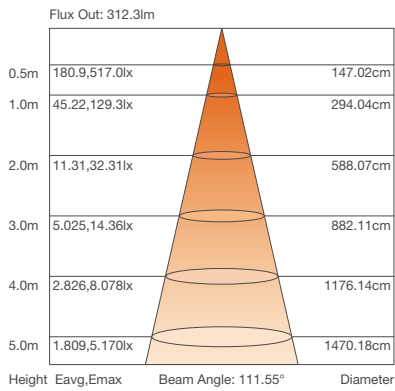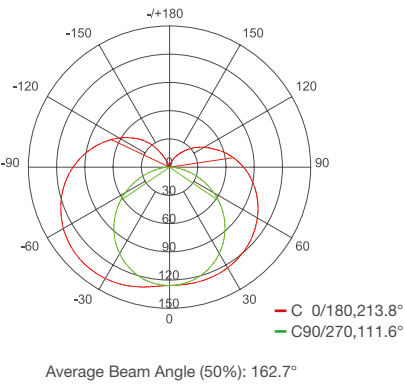

Note: the above two figures are tested with the sample NDR1414-W.

NDR0604-COB Plus
D-SERIES

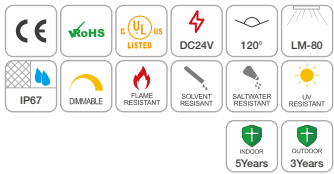

- Color options: Single color.
- Small size neon, CRI90
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Single color supports PWM, 0-10V, DALI dimming.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDR0604-COB Plus-Single color	DC24V	>90	2700-6000K	972	135	7.2	288pcs/m	27.78mm	5000*6*4mm
NDR0604-COB Plus-H-Single color	DC24V	>90	2700-6000K	1022	142	7.2	288pcs/m	27.78mm	5000*6*4mm



The data of 2700K-6000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

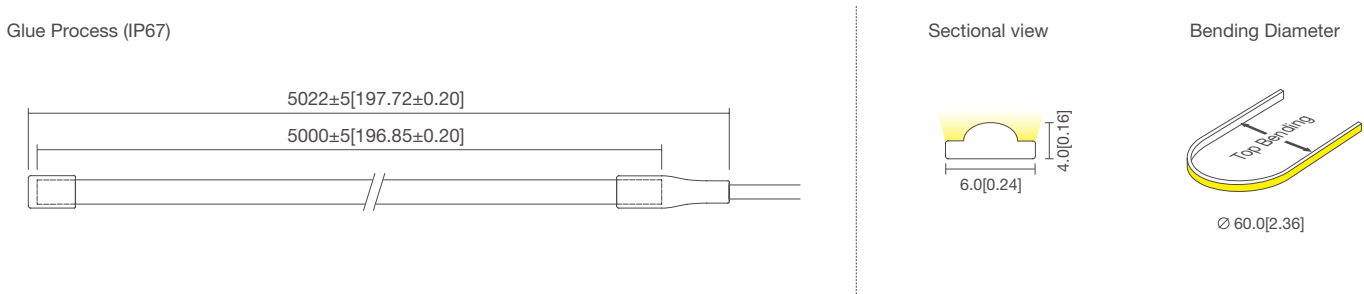


PHOTOMETRIC

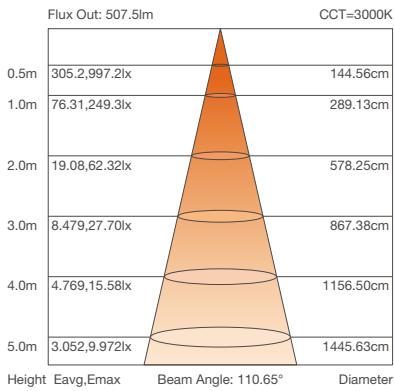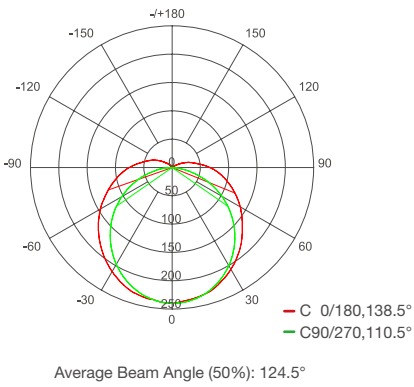

Note: the above two figures are tested with the sample NDR0604-COB Plus at CCT 3000K, for other data, please consult sales rep.

NDR1004-COB Plus

D-SERIES

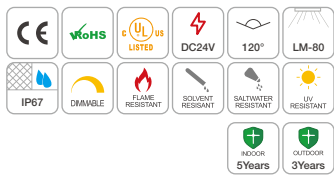

- Color options: Single color.
- Small size neon, CRI90
- Top bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Single color supports PWM, 0-10V, DALI dimming.



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	CRI	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDR1004-COB Plus-Single color	DC24V	>90	☀ 2700-6000K	1300	130	10	288pcs/m	27.78mm	5000*10*4mm
NDR1004-COB Plus-H-Single color	DC24V	>90	☀ 2700-6000K	1450	145	10	288pcs/m	27.78mm	5000*10*4mm


☐ The data of 2700K-6000K is based on 4000K.

☐ For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP67)

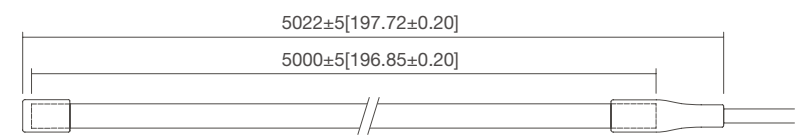



Sectional view



Bending Diameter



PHOTOMETRIC

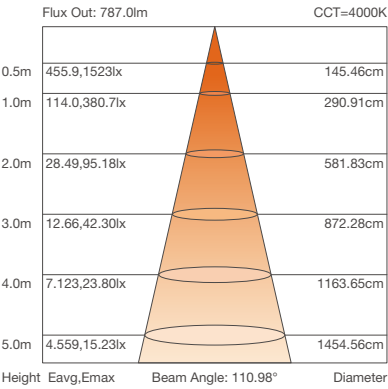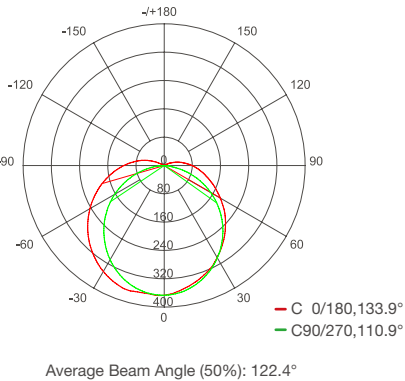

Note: the above two figures are tested with the sample NDR1004-COB Plus at CCT 4000K, for other data, please consult sales rep.

LED
NEON

TOP BENDING

SIDE BENDING NEON FLEX

Side-bending design with uniform illumination, perfect for creative shapes and architectural accents.



NSF1617
S-SERIES



- Color options: Single color, WN, and PIXEL.
- High quality components with stable performance.
- Designed with anti-wicking ferrule.
- Good flexibility, side bending.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1617-Single color-CC	DC24V	>90	2400-6500K	1229	69	17.2	140pcs/m	50mm	10000*16*17mm
		\	Red	391	22				
		\	Green	1020	58				
		\	Blue	244	14				
		\	Yellow	268	15				
		\	Orange	460	26				

Note: The data of 2400K-6500K is based on 4000K. For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch

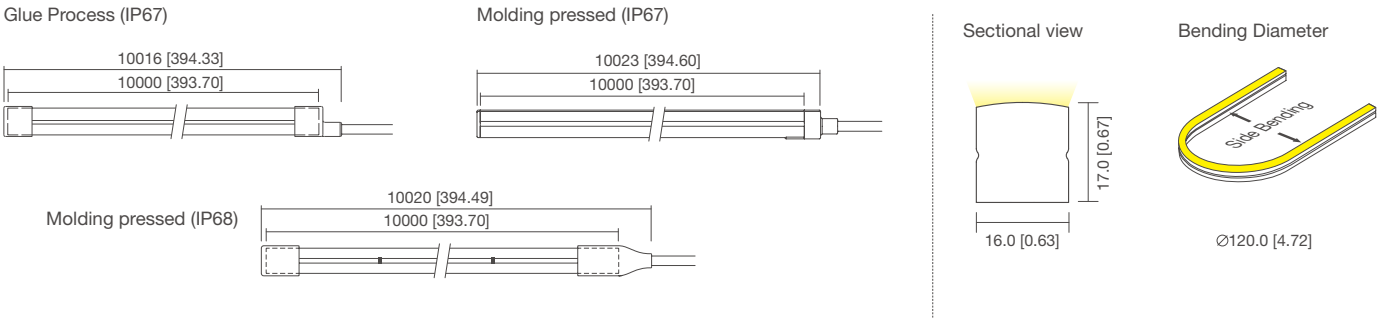


Note: Anti-wicking ferrule suitable for neon strips with molding pressed(IP67/IP68) end cap


PHOTOMETRIC

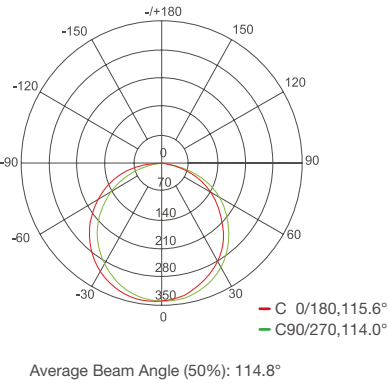

Note: The data is the test result of NSF1617-singer. For other data, please consult sales rep.

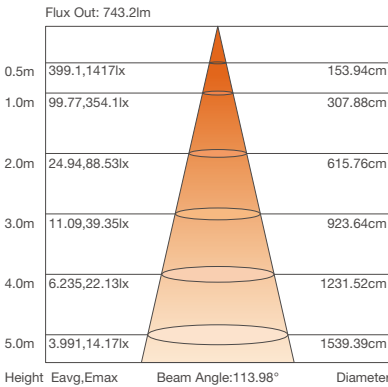

NSF1617
S-SERIES

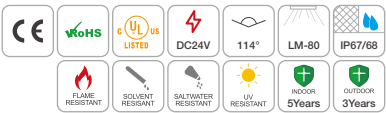

- Color options: RGB, RGBW.
- High quality components with stable performance.
- Designed with anti-wicking ferrule.
- Good flexibility, side bending.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1617-RGB-CV	DC24V	\	Red	94	17	5.7	120pcs/m	50mm	5000*16*17mm
			Green	269	48	5.7			
			Blue	56	10	5.7			
			RGB	416	25	17.2			

Note: For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch

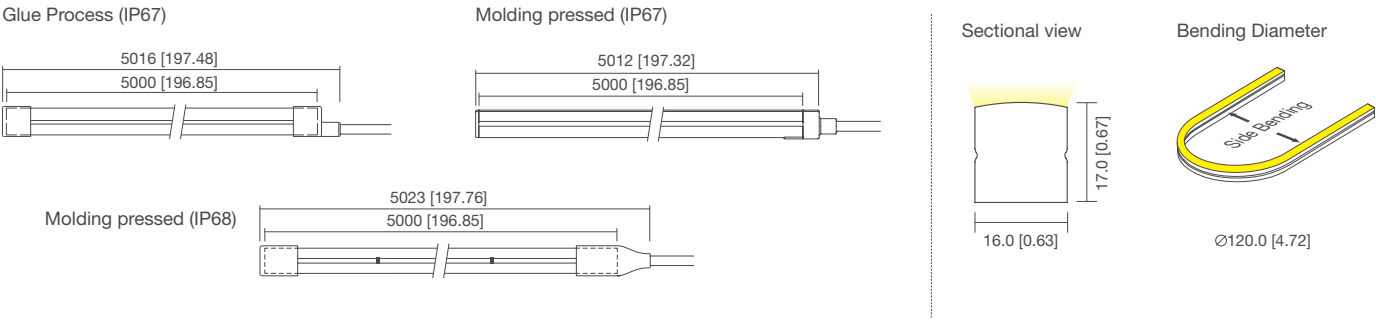


Note: For more information, please contact our sales representative.


PHOTOMETRIC

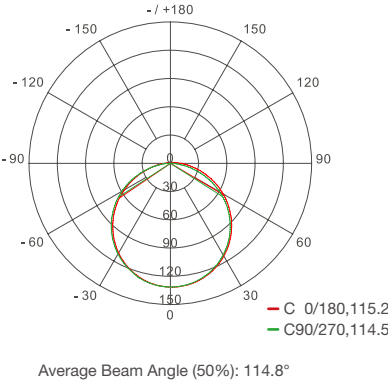

Note: The data is the test result of NSF1617-RGB. For other data, please consult sales rep.

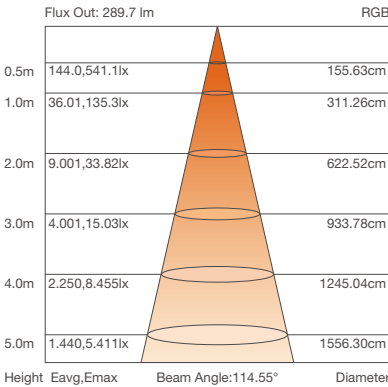

NSF1617-Black
S-SERIES

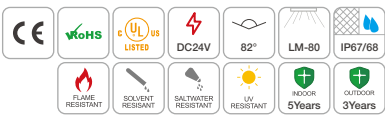

- Color options: Single color;
- Black lamp body, uniform lighting;
- Good flexibility, side bending;
- High quality components with stable performance;
- Customization: multiple spec options, can be customized upon requirements;
- Warranty: 5 years indoor, 3 years outdoor.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NSF1617-Black-Single color	DC24V	>90	● 2200K	45.0	2.6	17.28	140pcs/m	50mm	10000*16*17mm
			● 2700K	46.1	2.7				
			● 3500K	46.8	2.7				
			● 4000K	46.3	2.7				
			● 4500K	43.7	2.5				


Note: □ For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

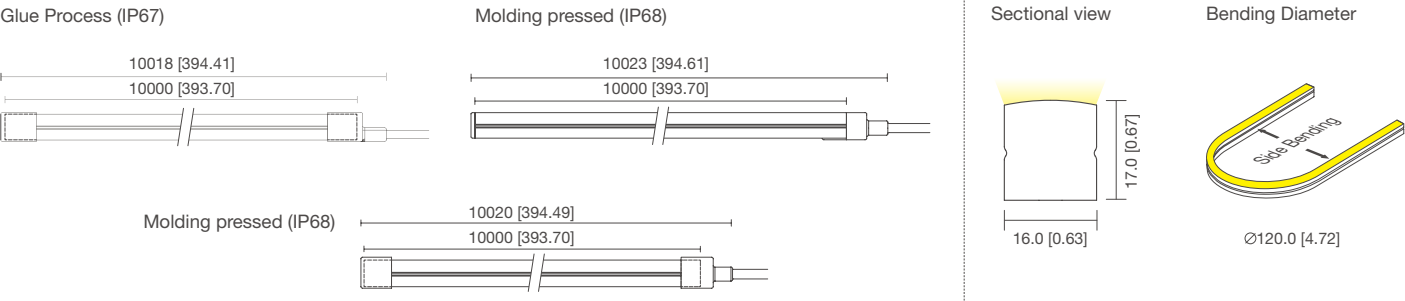


PHOTOMETRIC

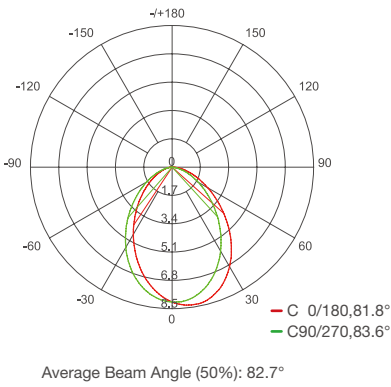

Note: the above two figures are tested with the sample single color at CCT 2800K, for other data, please consult sales rep.

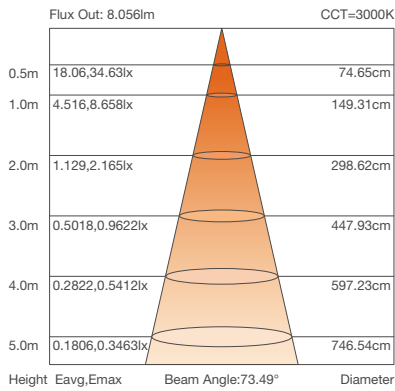

NSF1617TS
S-SERIES

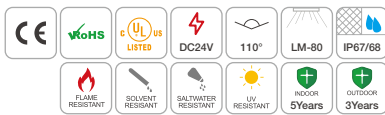

- Color options: Single color;
- Double-sided emitting, uniform light, no light spots;
- Good flexibility, side bending;
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color does not support dimming (If using Mean Well ELG/HLG power supply, it supports PWM dimming within 2KHz).




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NSF1617TS-Single color	DC24V	>90	● 3000K	45.0	2.6	17.28	140pcs/m	50mm	10000*16*17mm
			● 3500K	46.1	2.7				
			● 4000K	46.8	2.7				
			● 4500K	46.3	2.7				
			● 6000K	46.3	2.7				


Note: □ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

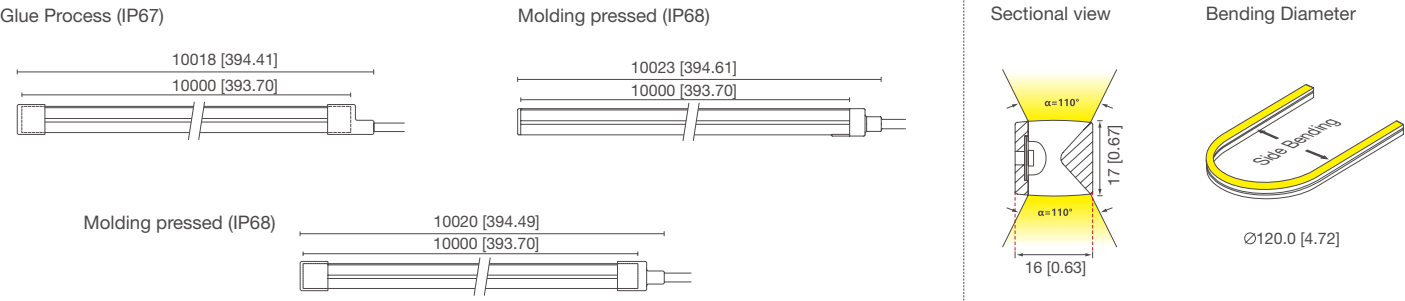

PHOTOMETRIC

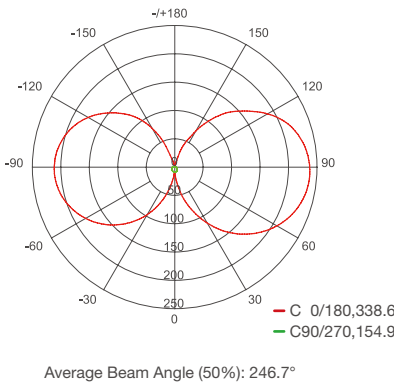

Note: the above two figures are tested with the sample NSF1617TS at CCT 6000K, for other data, please consult sales rep.

NSF1212
S-SERIES



- Color options: Single color, tunable white, and RGB
- Superior design with exquisite craftsmanship ensure stable and reliable performance
- Side bending and good flexibility
- Warranty: 5 years indoor, 3 years outdoor
- Customization: multiple spec options, can be customized upon requirements
- Single color supports PWM dimming within 1KHz




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1212-Single color	DC24V	>90	2300-6500K	574	69	8.64	168pcs/m	83.3mm	10000*12*12mm
		\	Red	190	23				
		\	Green	617	74				
		\	Blue	128	15				
		\	Yellow	98	12				
		\	Orange	212	25				
		\							


Note: ☐ The data of 2300K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

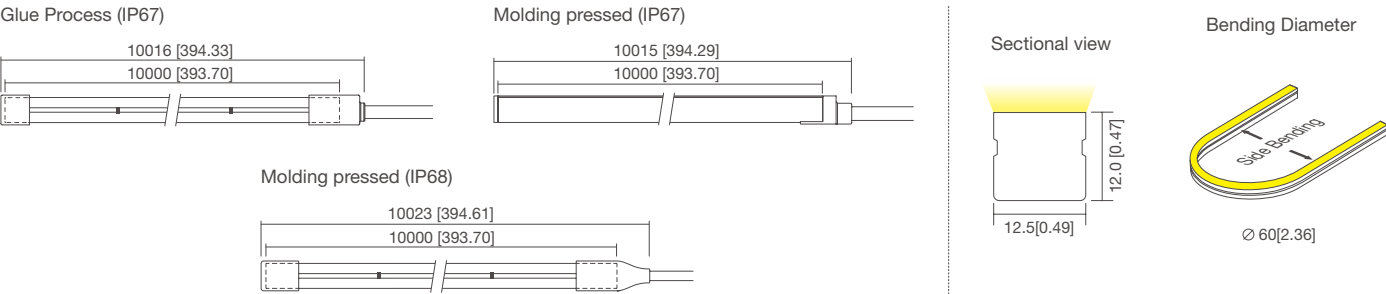


PHOTOMETRIC

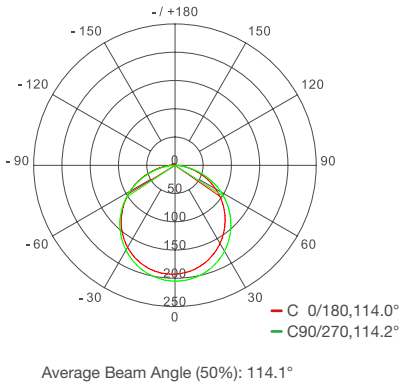

Note: the above two figures are tested with the sample 6500K, for other datas, please consult sales rep.

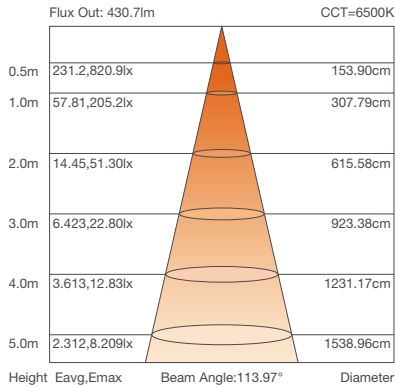

NSF1220
S-SERIES

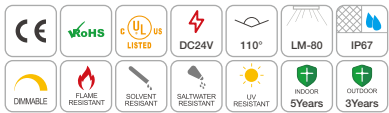

- Color options: Single color, WN, RGBW, Pixel.
- Adopt high-quality components, with stable and reliable performance.
- Single color supports PWM dimming within 10KHz.
- Side bending with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1220-Single color	DC24V	>90	2400-6000K	908	59	14.76	140pcs/m	50mm	12000*12*20mm
		\	Red	232	15				
		\	Green	802	52				
		\	Blue	190	12				
		\	Yellow	136	9				
		\							


Note: ☐ The data of 2400K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

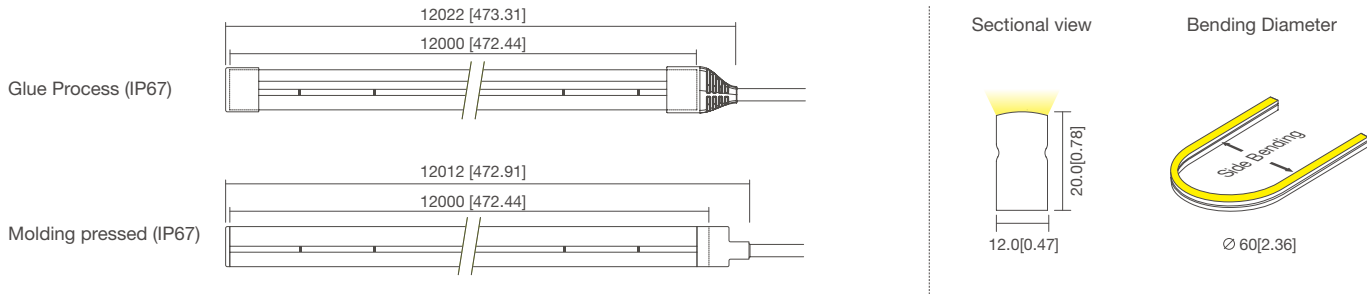


PHOTOMETRIC

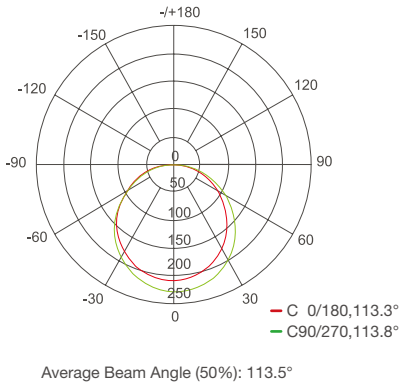

Note: the above two figures are tested with the sample 2900K, for other datas, please consult sales rep.

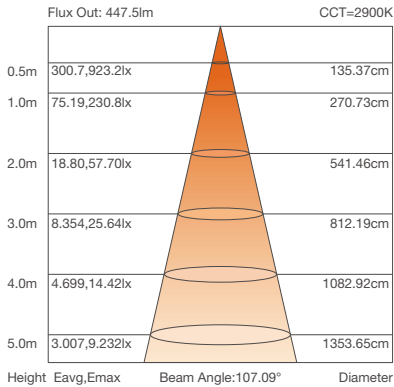

NSF1017
S-SERIES

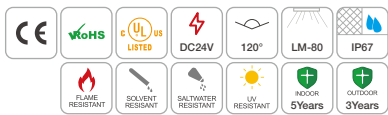

- Color option: single color, WN, RGB, RGBW;
- Adopt high quality components with stable and reliable performance;
- Side bending, suitable for many shapes and good weather adaptability;
- Warranty: 5 years indoor, 3 years outdoor;
- Multiple specifications, support customization;



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1017-Single color	DC24V	>90	2300-5000K	500	43.3	11.5	112pcs/m	62.5mm	10000*10*17mm
		\	Red	146	12.2				
		\	Green	293	24.1				
		\	Blue	61	14.9				
		\	Yellow	291	24.0				
		\	Orange	122	10.8				
		\							



Note: ☐ The data of 2300K-5000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

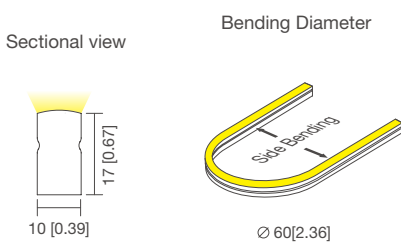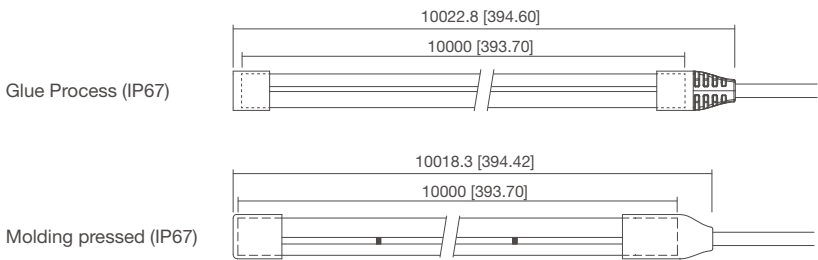

PHOTOMETRIC

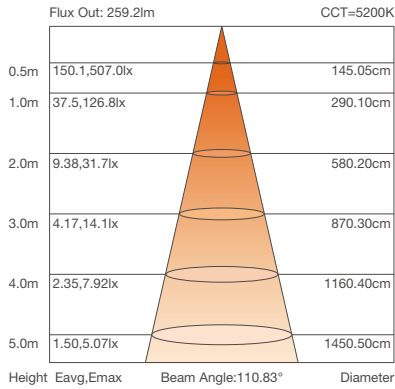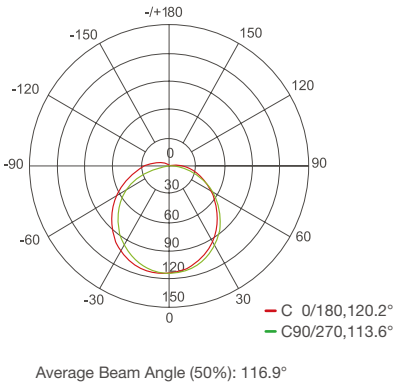

Note: the above two figures are tested with the sample 5200K, for other datas, please consult sales rep.

NSF1010
S-SERIES



- Color options: Single color.
- Mini size, side bending with good flexibility.
- Warranty: 5 years indoors, 3 years outdoors.
- Single color supports PWM, 0-10V, DALI dimming.
- Multiple spec options, can be customized upon requirements.



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1010-Single color	DC24V	>90	2700K	468	49	9.6	120pcs/m	50mm	5000*10*10mm
			3000K	478	50				
			3500K	489	51				
			4000K	495	51				
			5000K	503	52				
			5500K	499	52				
			6000K	480	50				



Note: ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

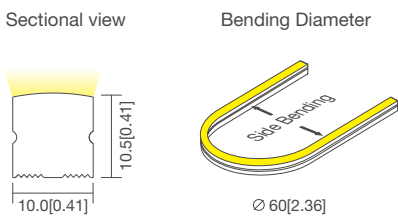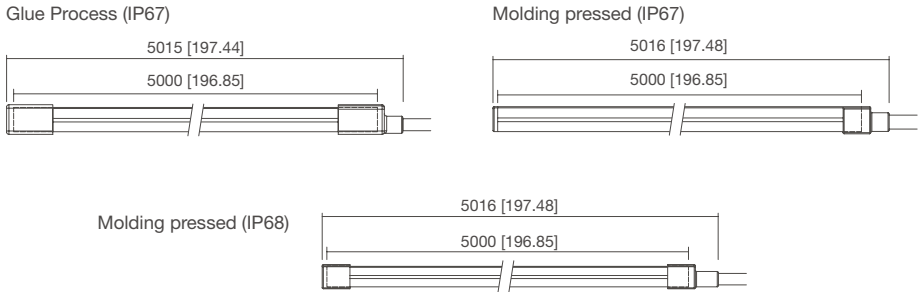

PHOTOMETRIC

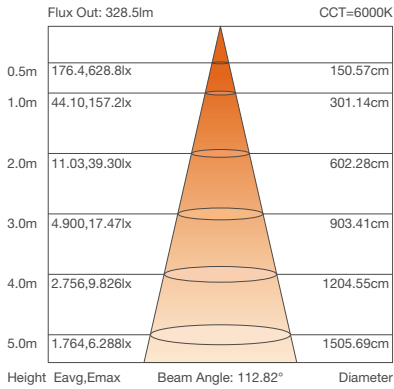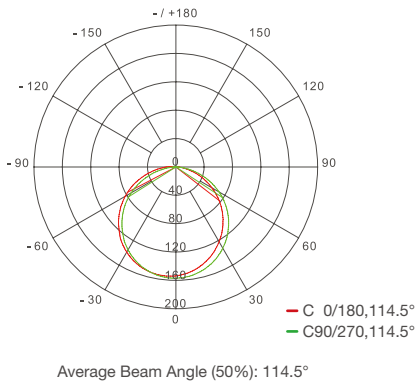

Note: the above two figures are tested with the sample 6000K, for other datas, please consult sales rep.

NSF1010A
S-SERIES



- Color options: Single color.
- Small size, side bending with good flexibility.
- Mini cutting design, arbitrary cutting without large dark areas.
- Warranty: 5 years indoors, 3 years outdoors.
- Single color supports PWM, 0-10V, DALI dimming.
- Multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1010A-Single color	DC24V	>90	2500K	316	39	8	168pcs/m	5.95mm	5000*10*10mm
			2700K	322	40				
			3000K	333	41				
			3500K	334	41				
			4500K	349	43				
			5500K	334	41				


Note: □ For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

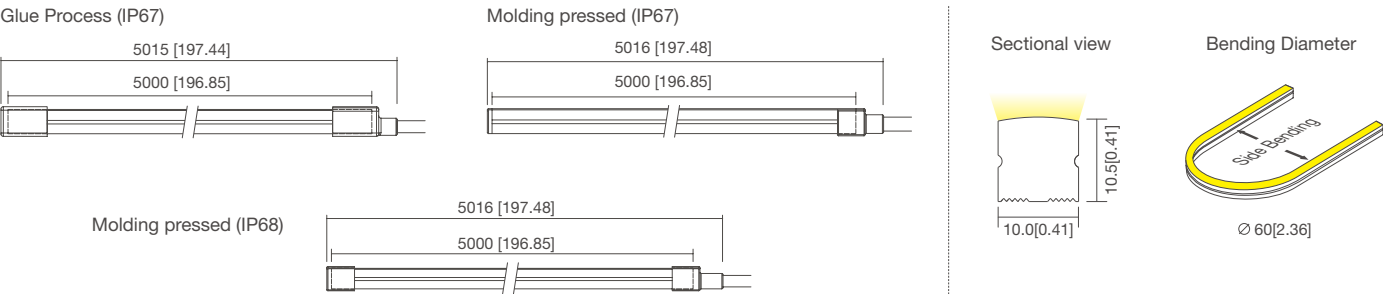


PHOTOMETRIC

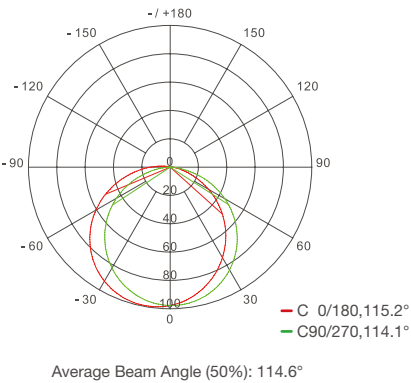

Note: the above two figures are tested with the sample NSF1010A-3000K, for other datas, please consult sales rep.

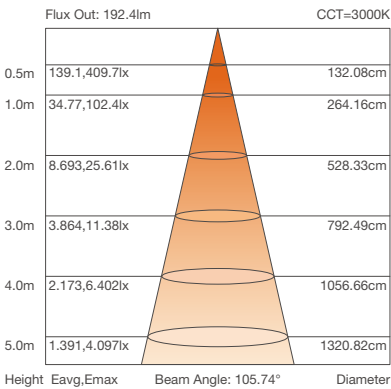

NSF0612
S-SERIES

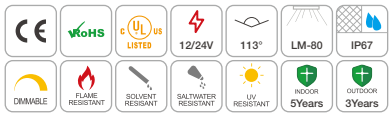

- Color options: Single color, WN.
- Adopt high quality components with stable and reliable performance.
- Side bending, suitable for many shapes and good weather resistance.
- Support the use of a controller or a dimmer.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF0612-Single color	DC12V	>80	2200-5800K	218	19.3	12	120pcs/m	25mm	5000*6*12mm
		\	Red	86	7.2				
		\	Green	114	9.5				
		\	Blue	39	3.3				
		\	Yellow	201	16.8				
NSF0612-Single color	DC24V	>90	2200-5800K	393	40	9.84	140pcs/m	50mm	13000*6*12mm
		\	Red	128	13				
		\	Green	383	39				
		\	Blue	88	9				
		\	Yellow	69	7				


Note: □ The data of 2200K-5800K is based on 4000K. □ For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

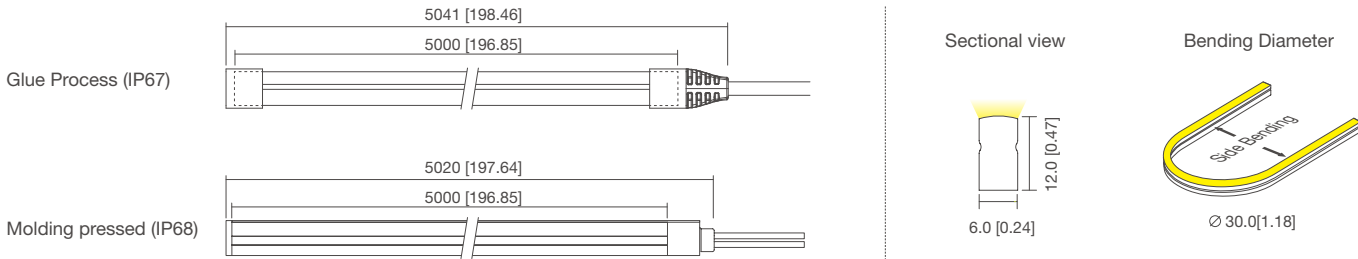

PHOTOMETRIC

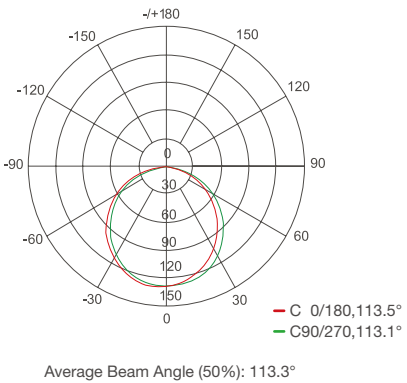

Note: the above two figures are tested with the sample 5200K, for other datas, please consult sales rep.

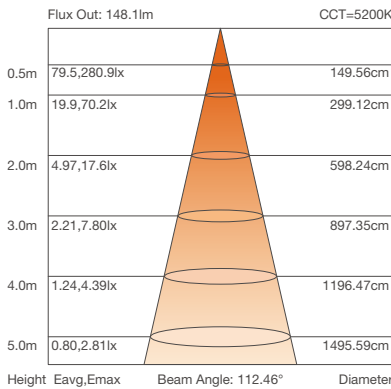

NSF0410
S-SERIES



- Color options: Single color.
- Adopt high quality components with stable and reliable performance.
- Side bending, suitable for many shapes and good environmental adaptability.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DAL dimming.

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NSF0410-Single color	DC24V	>80	2100-6000K	324	33.9	9.6	120pcs/m	50mm	5000*4*10mm
		\	Red	79	8.6				
		\	Green	312	20.7				
		\	Blue	43	4.6				
		\							

Note: The data of 2100K-6000K is based on 4000K. For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP67)

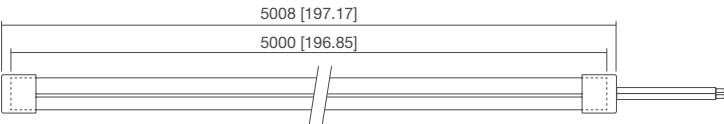



Sectional view



Bending Diameter





PHOTOMETRIC

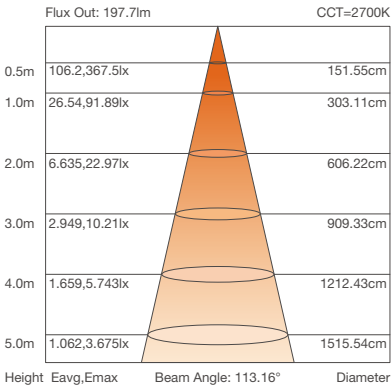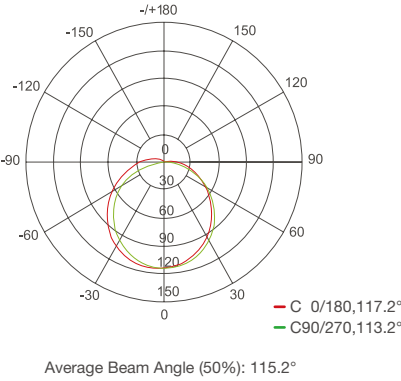

Note: the above two figures are tested with the sample 2700K, for other datas, please consult sales rep.

NSF0309
S-SERIES

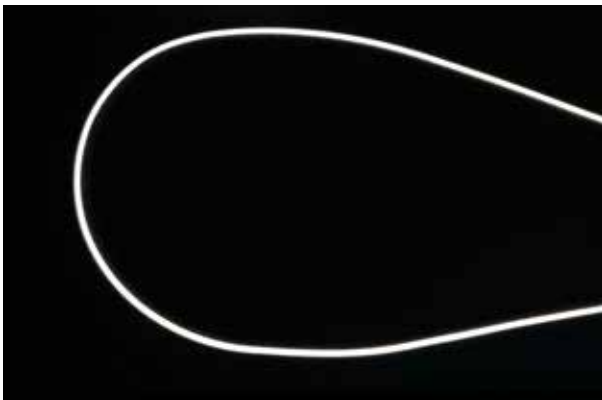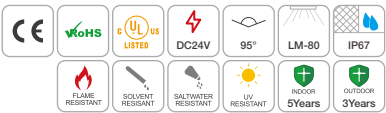

- 3mm width ultra-slim neon
- High quality components with stable performance
- Good flexibility, side bending
- Warranty: 5 years indoor, 3 years outdoor
- Multiple specifications, support customization

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NSF0309-Single color	DC24V	>80	2700-6000K	389	54	7.2	168pcs/m	41.67mm	5000*3*9mm
		\	Red	130	18				
		\	Green	317	44				
		\	Blue	65	9				
		\	Yellow	86	12				
		\	Orange	130	18				

Note: The data of 2700K-6000K is based on 4000K. For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch

Glue Process (IP67)

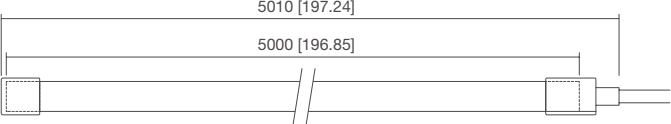

Sectional view





Bending Diameter



Note: within 5m, customizable lengths are multiples of the min cuttable length.

PHOTOMETRIC

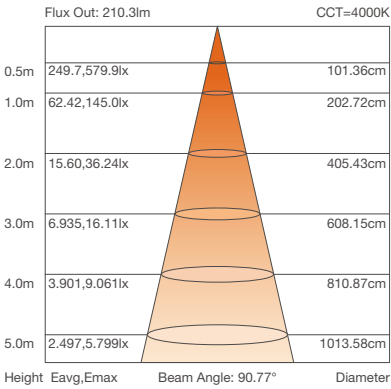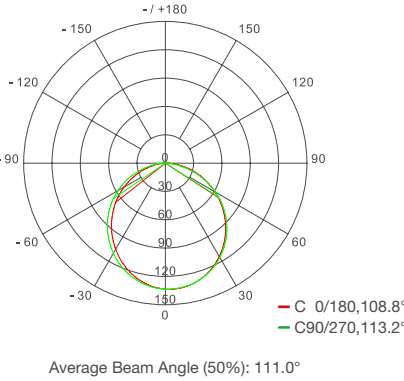


Note: the above two figures are tested with the sample NSF0309 at 4000K, for other data, please consult sales rep.

NSF0306
S-SERIES



- 3mm width ultra-slim neon
- High quality components with stable performance
- Good flexibility, side bending
- Support 0~10V, DALI, PWM dimming
- Warranty: 5 years indoor, 3 years outdoor
- Multiple specifications, support customization

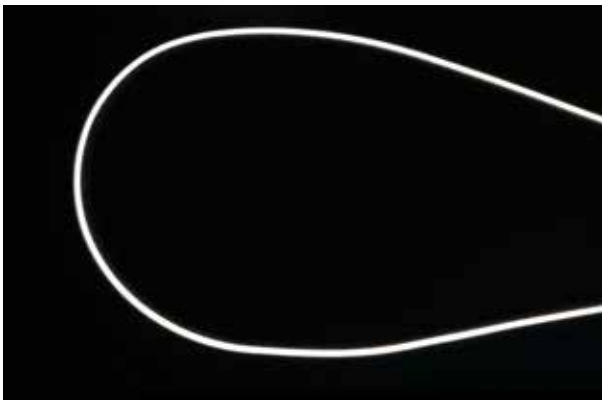

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF0306-W	DC24V	>90	1800K	126	17.5	7.2	182pcs/m	38mm	5000*3*6mm
			2700K	174	24.0				
			3000K	187	26.0				
			4000K	199	27.7				
			4500K	188	26.0				
			5500K	153	21.3				

Note: ☐ For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP67)

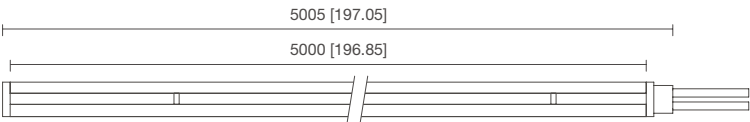



Sectional view



Bending Diameter



PHOTOMETRIC

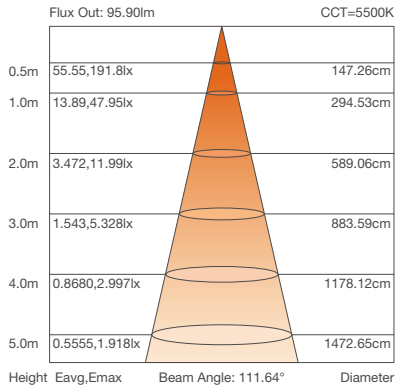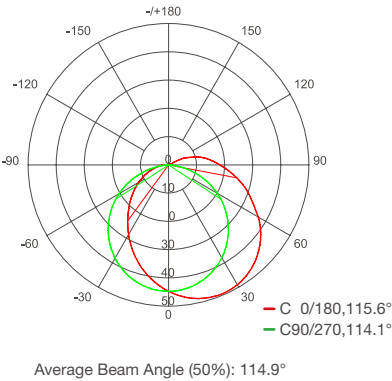

Note: the above two figures are tested with the sample NSF0306-5500K, for other data, please consult sales rep.

NSR1025
S-SERIES



- Color options: WN, RGB, RGBW and PIXEL.
- Silicone integrated extrusion shaping process, good weather adaptability.
- Good flexibility, side bending.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSR1025-WN	DC24V	>80	5600K	297	41.4	7.2	240pcs/m	50mm	10000*10*25mm
			3000K	280	39.4	7.2			
			W+N	565	39.5	14.4			

Note: for more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP67)

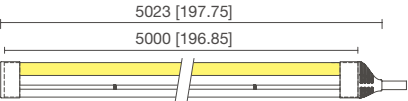


Molding pressed (IP67)

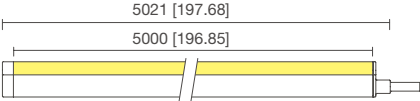

Molding pressed (IP68)

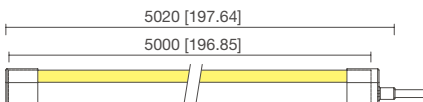



Sectional view



Bending Diameter



PHOTOMETRIC

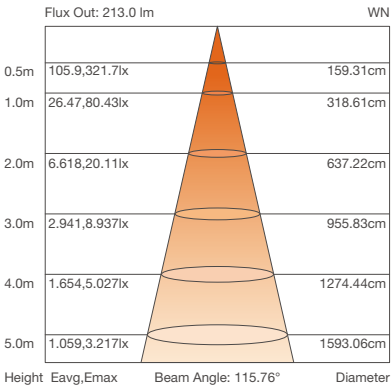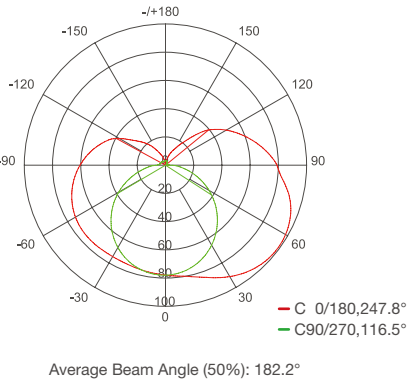

Note: The data is the test result of NSR1025-WN. For other data, please consult sales rep.

NSR0817
S-SERIES



- Color options: Single color/WN/RGB.
- High-quality constant current components with stable performance.
- Single color supports PWM dimming within 10KHz.
- Side bending with great flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSR0817-Single color	DC24V	>90	2400-6000K	508	53	9.84	140pcs/m	50mm	13000*8*17mm
		\	Red	164	17				
		\	Green	514	53				
		\	Blue	114	12				
		\	Yellow	98	10				


Note: □ The data of 2400K-6000K is based on 4000K. □ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

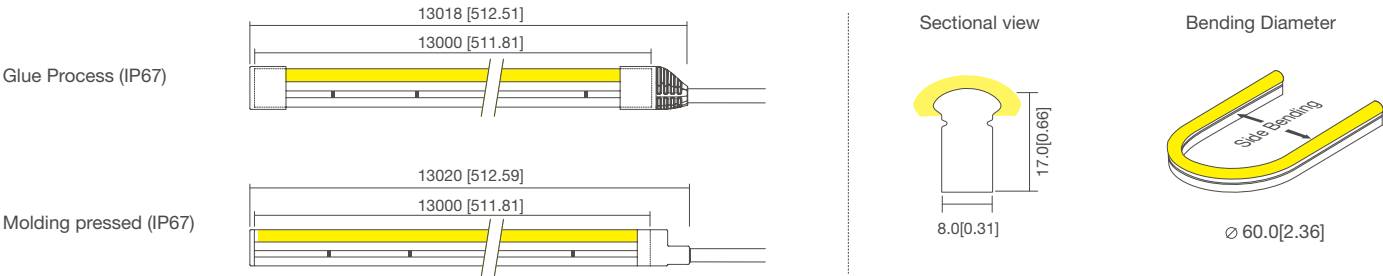


PHOTOMETRIC

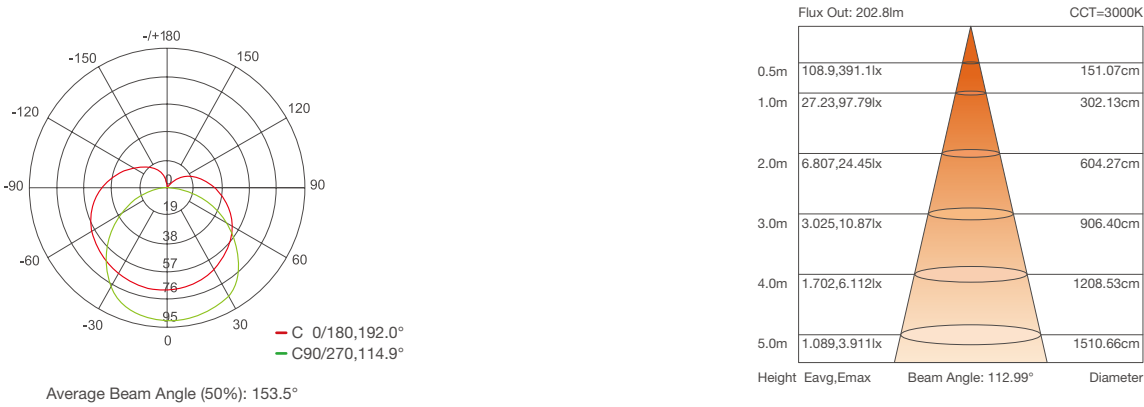

Note: the above two figures are tested with the sample NSF0817 at 3000K, for other data, please consult sales rep.

NSR0615
S-SERIES



- Color options: Single color and tunable white.
- Side bending with good flexibility.
- Adopt integrated silicone extrusion molding process, good weather resistance.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI dimming.



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSR0615-Single color	DC12V	>80	2100-6000K	162.4	14.4	11.5	96pcs/m	10.42mm	5000*6*15mm
		\	Red	36	2.9				
		\	Green	138	15				
		\	Blue	39	3.6				
		\	Yellow	62	5.6				
NSR0615-Single color	DC24V	>80	2900-25000K	284	23.6	12	96pcs/m	50mm	5000*6*15mm
		\	Red	9	0.7				
		\	Green	210	17.8				
		\	Blue	14	2.2				
		\	Yellow	2	0.2				


Note: □ The data for 2100K-6000K is based on 4000K. □ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch



PHOTOMETRIC

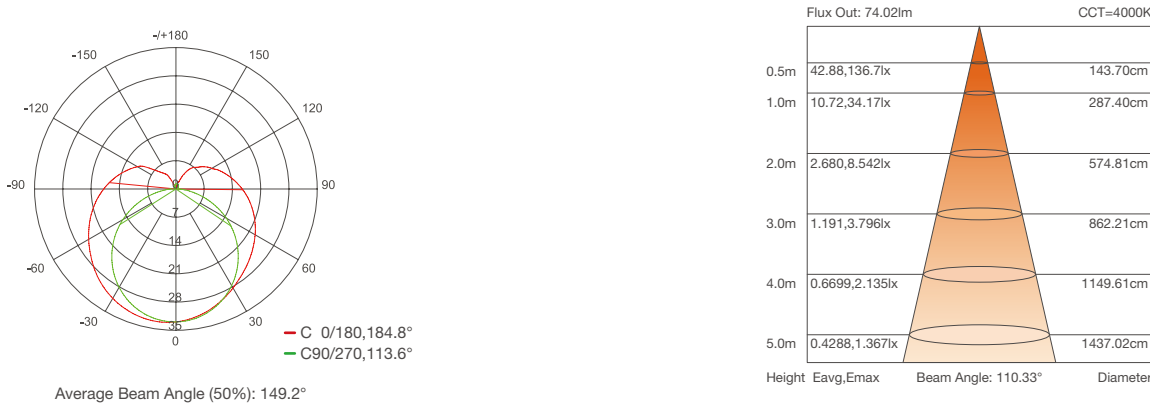

Note: the above two figures are tested with the sample 4000K, for other datas, please consult sales rep.

NSR0512
S-SERIES



- Color options: Single color.
- Design: Superior design with exquisite craftsmanship ensure stable and reliable performance.
- Warranty: 5 years indoor, 3 years outdoor.
- Side bending with good flexibility.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI dimming.



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSR0512-Single color	DC24V	>90	2300K	215	22.1	9.6	120pcs/m	50mm	5000*5*12mm
		>80	2500K	194	18.7				
		>80	2700K	183	19.2				
		>80	2900K	189	19.0				
		>80	4000K	211	20.4				
		>80	5000K	205	19.8				
		>90	6000K	221	20.2				

Note: For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP67)

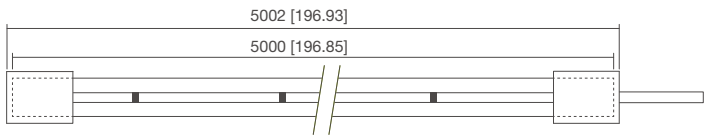


Sectional view




Bending Diameter



PHOTOMETRIC

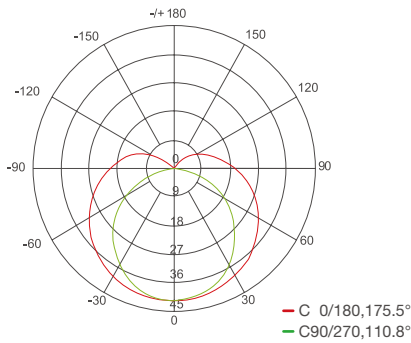

Note: for other datas, please consult sales rep.

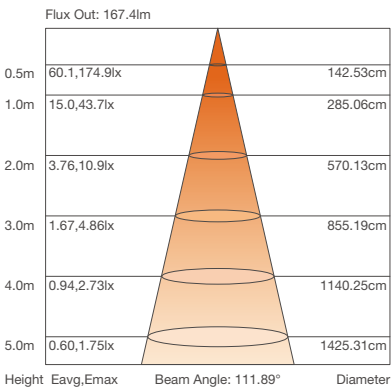

N2-4 pro
S-SERIES



- Color options: Single color ;
- Adopting lamp beads with strong anti-static ability;
- Side bending with good flexibility;
- Adopt integrated extrusion shaping technology, good weather resistance;
- 15m no brightness drop with single-end power supply;
- Warranty: 5 years indoors, 3 years outdoors;
- Various specifications are available, support customization;



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
N2-4 pro-Single color	DC24V	>80	2700-6500K	837	87	9.6	120pcs/m	50mm	15000*10*25mm
		\	Red	158	15				
		\	Green	145	14				
		\	Blue	25	2				
		\	Yellow	138	13				
		\	Orange	243	23				
		\							

Note: ☐ The data of 2700K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP67)

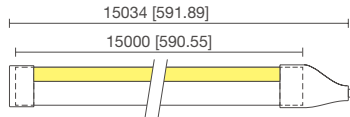


Molding pressed (IP68)

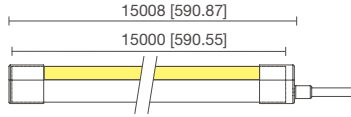

Molding pressed (IP68)

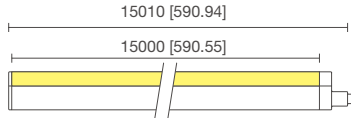


Sectional view




Bending Diameter




PHOTOMETRIC

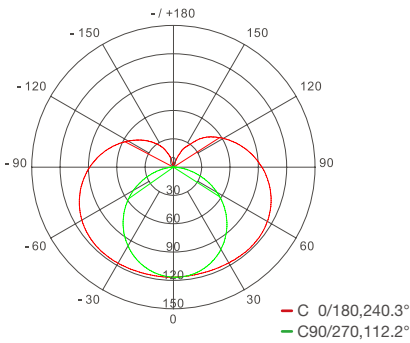


Note: for other data, please consult sales rep.

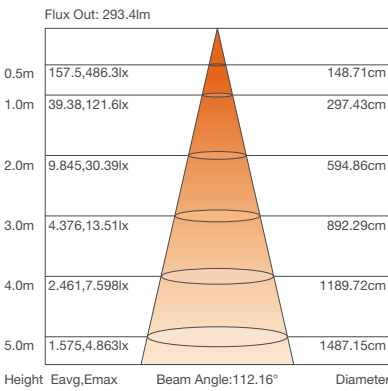

N2-4 plus
S-SERIES

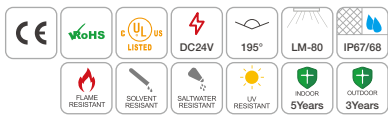

Color options: Single color ;
The rigid PCB design in a plastic shell, allowing for any bending or twisting without damaging the LEDs, PCB, or electronic components.
Power through steel cable, long run, Strong tensile resistance.
Warranty: 5 years indoor, 3 years outdoor.
Support PWM dimming within 10KHz.

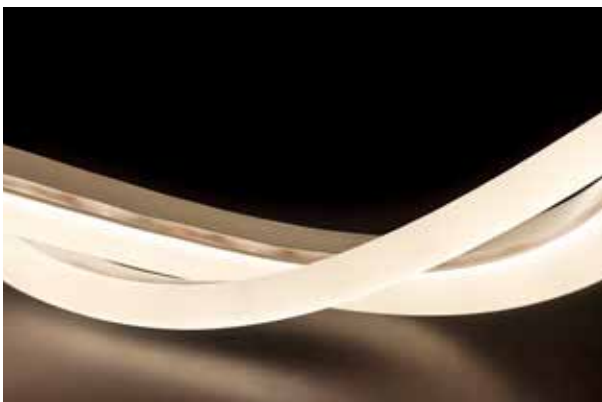


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
N2-4 Plus	DC24V	>80	2700-6500K	787	82	9.6	120pcs/m	50mm	15000*10*25mm
		\	Red	158	15				
		\	Green	145	14				
		\	Blue	25	2				
		\	Yellow	138	13				
		\	Orange	243	23				



Note: ☐ The data of 2700K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

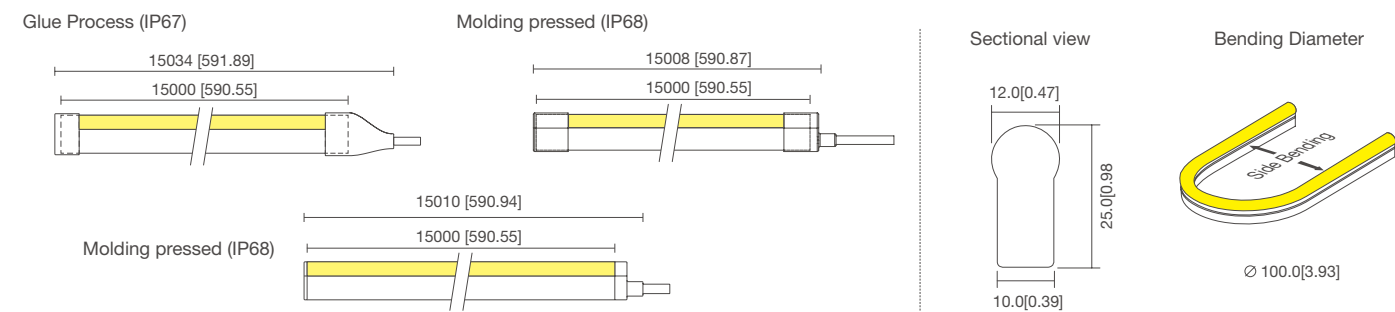

PHOTOMETRIC

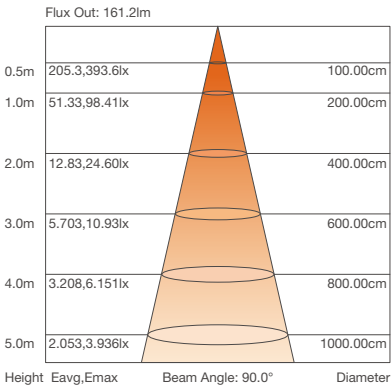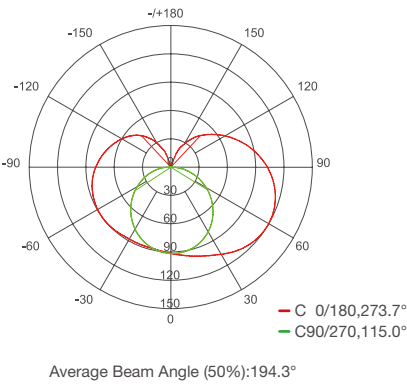

Note: for other data, please consult sales rep.


3D
NEON FLEX

Available in both top-bend and side-bend, perfectly fixing for many plane, curved and complex irregular structures.

N2-8 Pro
3D-SERIES



- Color options: Single color.
- Adopt modular PCB and wiring holder, ensuring that any bending or twisting will not damage the LEDs, PCB, or electronic components.
- Max 30m running length with one end power feed.
- 3D bending, with strong tensile strength.
- Patented product, with 5-year warranty (Refer to warranty terms for details).
- Support PWM dimming within 10KHz.

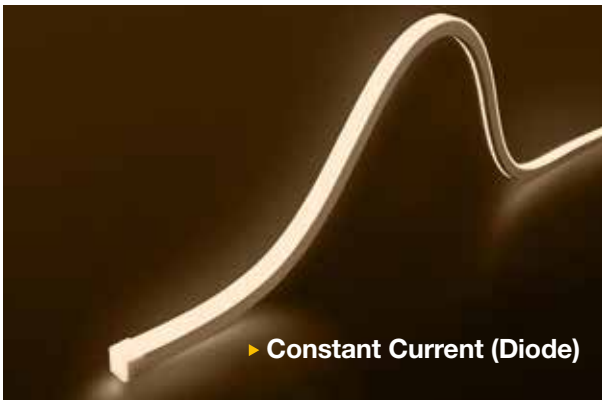


OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
N2-8 Pro (H)-CC	DC24V	>90	2700-6000K	498	52	15.36	96pcs/m	62.5mm	30000*16*17mm
		\	Red	101	11				
		\	Green	255	27				
		\	Blue	46	5				
		\	Yellow	104	10				
		\	Orange	137	14				

Note: The data of 2700K-6000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS

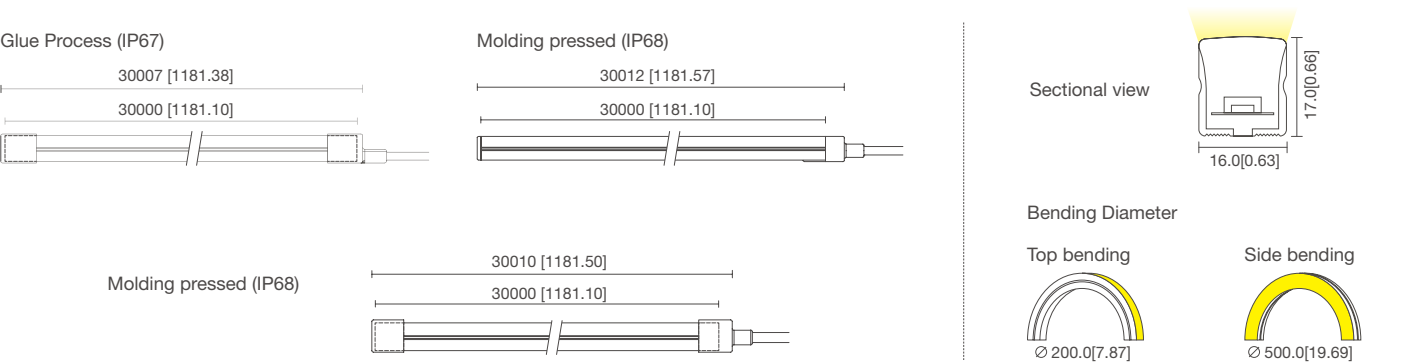

PHOTOMETRIC

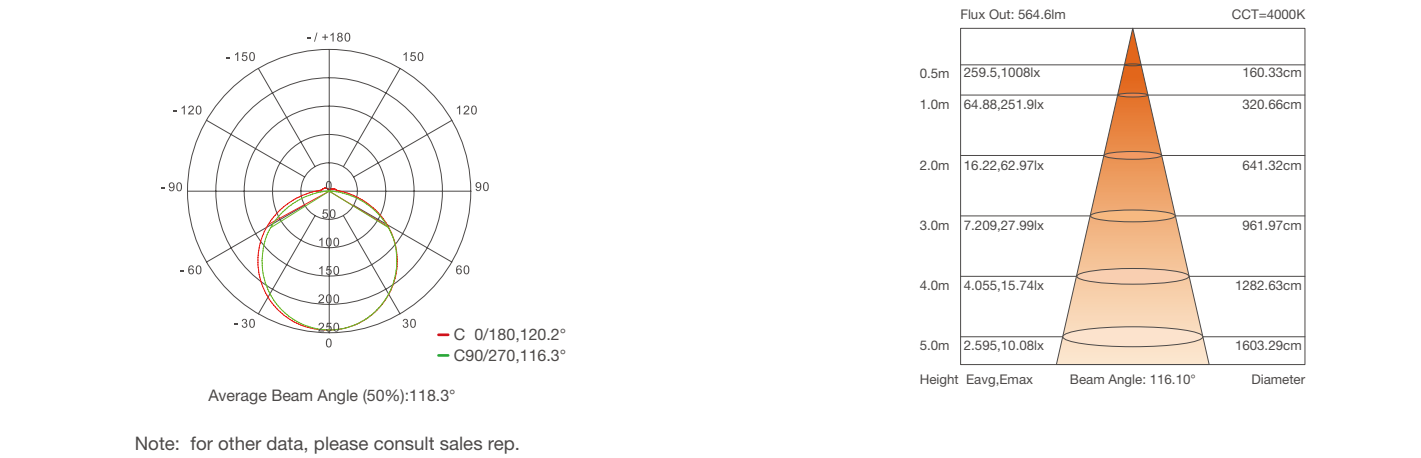


Note: for other data, please consult sales rep.

N2-8 Pro
3D-SERIES



- Color options: Single color.
- Adopt modular PCB and wiring holder, ensuring that any bending or twisting will not damage the LEDs, PCB, or electronic components.
- Max 15m running length with one end power feed.
- 3D bending, with strong tensile strength.
- Patented product, with 5-year warranty (Refer to warranty terms for details).
- Support PWM dimming within 10KHz.

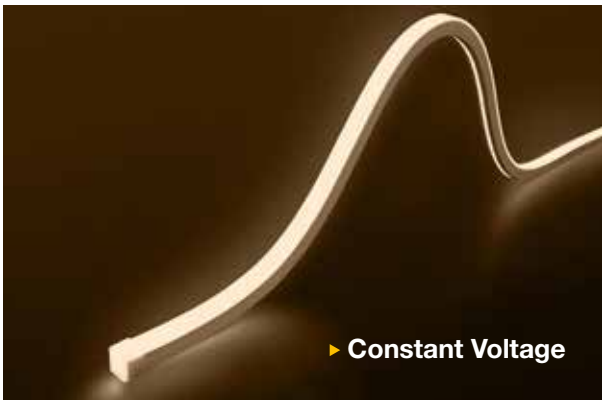


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
N2-8 Pro(H)-CV	DC24V	>90	2700-6000K	796	52	15.36	96pcs/m	62.5mm	10000*16*17mm
N2-8 Pro(L)-CV	DC24V	>90	2700-6000K	506	53	9.6	96pcs/m	62.5mm	15000*16*17mm

Note: The data of 2700K-6000K is based on 4000K. For more information, please contact our sales representative.

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
N2-8 Pro-H 1200lm/m	DC24V	>90	4000K	1300	86	15	112pcs/m	71.42mm	7000*16*17mm

PROFILE DRAWINGS

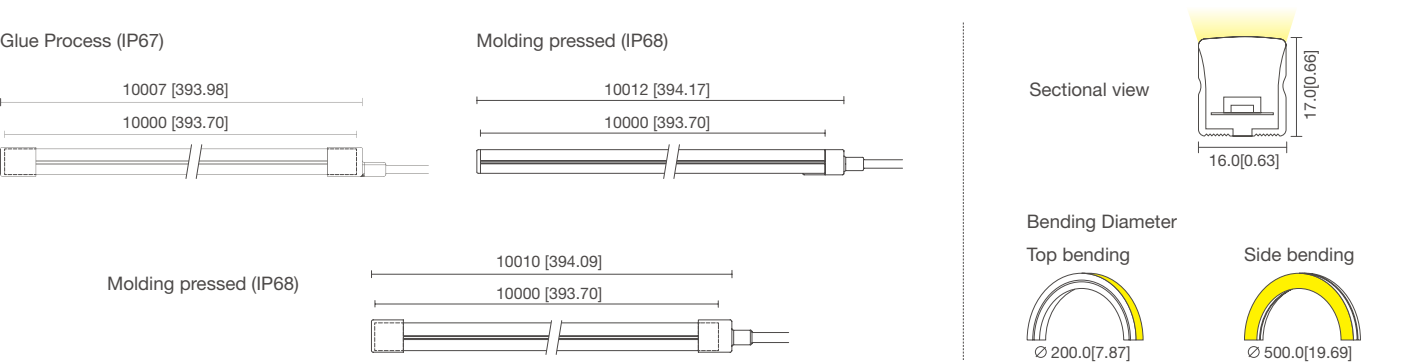

PHOTOMETRIC




Note: for other data, please consult sales rep.

N2-8 Plus
3D-SERIES



- Color options: Single color,WN,RGB,RGBW, Pixel.
- The rigid PCB design in a plastic shell, allowing for any bending or twisting without damaging the LEDs, PCB, or electronic components.
- Power is supplied through steel wires, enabling long daisy-chain connections with strong tensile strength and excellent 3D bending flexibility.
- Warranty: 5 years indoor, 3 years outdoor.

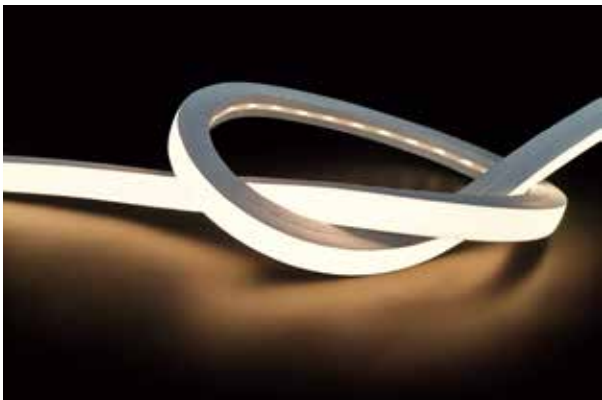


OPTICAL & ELECTRICAL PARAMETERS



Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
N2-8 Plus(L)	DC24V	>90	2700-5000K	553	48	11.52	96pcs/m	20mm	20000*16*17mm
		\	Red	81	7				
		\	Green	253	22				
		\	Blue	35	3				
		\	Yellow	104	9				
		\	Orange	81	7				

Note: The data of 2700K-5000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS Unit:mm/inch

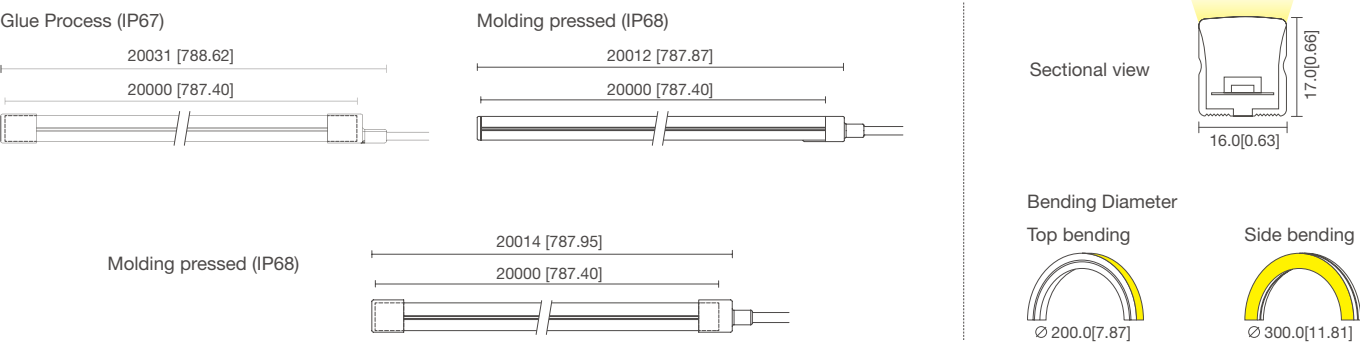


PHOTOMETRIC

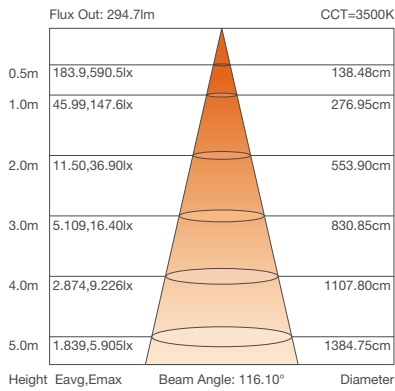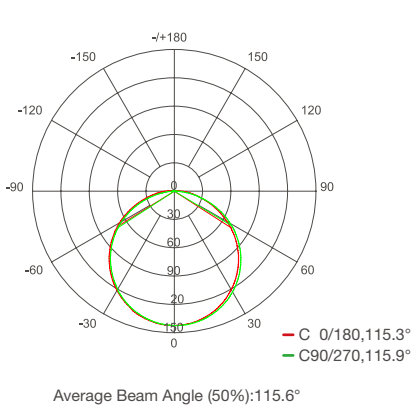


Note: the above two figures are tested with the sample N2-8 Plus at CCT 3500K, for other data, please consult sales rep.

N2-8 Plus
3D-SERIES

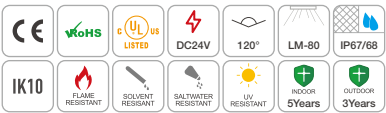

- Color options: Single color,WN,RGB,RGBW, Pixel.
- The rigid PCB design in a plastic shell, allowing for any bending or twisting without damaging the LEDs, PCB, or electronic components.
- Power is supplied through steel wires, enabling long daisy-chain connections with strong tensile strength and excellent 3D bending flexibility.
- Warranty: 5 years indoor, 3 years outdoor.

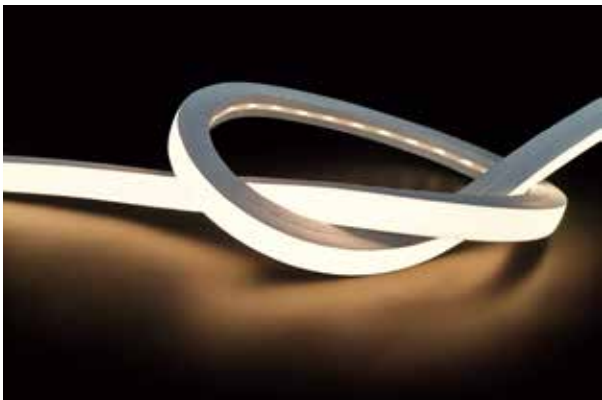


OPTICAL & ELECTRICAL PARAMETERS



Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
N2-8 Plus_WN	DC24V	>90	2700K	389	54	7.2	240pcs/m	23.81mm	10000*20*20mm
		>90	6500K	346	48	7.2			
		\	W+N	720	50	14.4			

Note: For more information, please contact our sales representative.

PROFILE DRAWINGS Unit:mm/inch

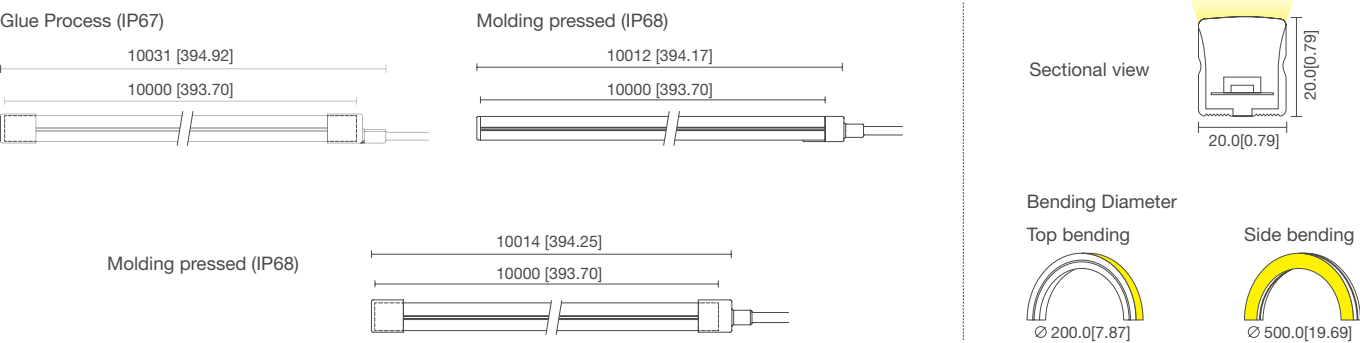


PHOTOMETRIC

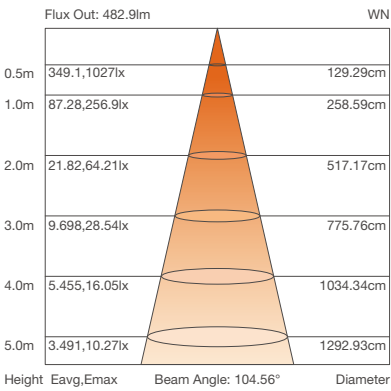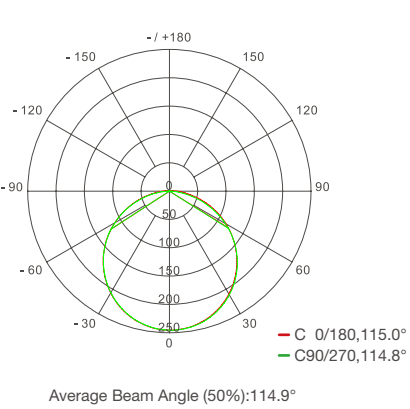

Note: the above two figures are tested with the sample N2-8 Plus at WN, for other data, please consult sales rep.

N2-8 Plus
3D-SERIES

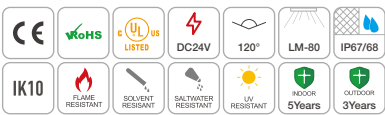

- Color options: Single color,WN,RGB,RGBW, Pixel.
- The rigid PCB design in a plastic shell, allowing for any bending or twisting without damaging the LEDs, PCB, or electronic components.
- Power is supplied through steel wires, enabling long daisy-chain connections with strong tensile strength and excellent 3D bending flexibility.
- Warranty: 5 years indoor, 3 years outdoor.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
N2-8 Plus-DMX_RGBW	DC24V	>90	2700-6000K	128	15	8.52	60pcs/m	50mm	15000*20*20mm
		\	Red	102	12	8.52			
		\	Green	162	19	8.52			
		\	Blue	25	3	8.52			
		\	RGBW	374	19	19.68			



Note: The data of 2700K-6000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

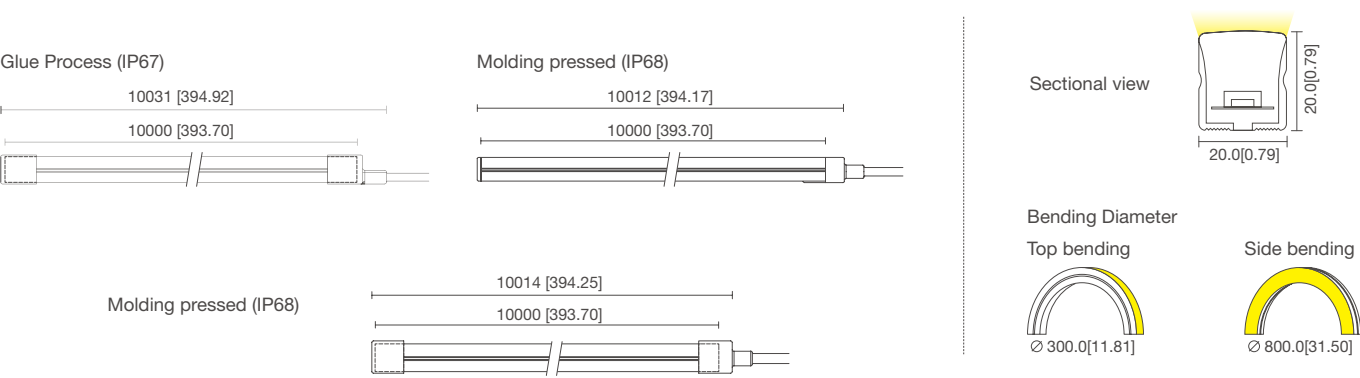

PHOTOMETRIC

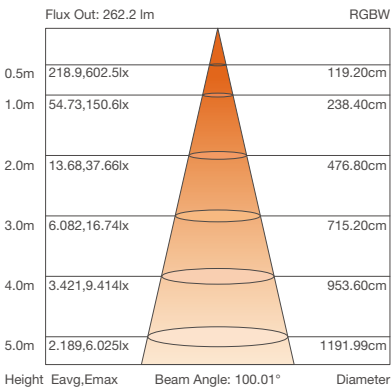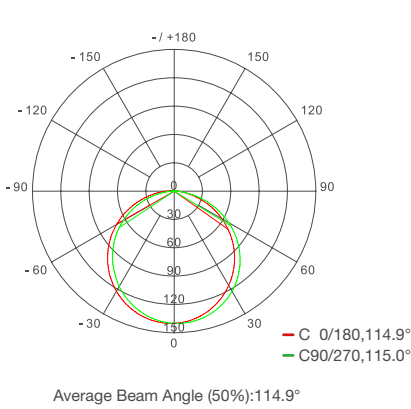

Note: the above two figures are tested with the sample N2-8 Plus-DMX_RGBW, for other data, please consult sales rep.

NMF1616TS
3D-SERIES



- Color options: Single color;
- Double-sided emitting, uniform light, no light spots;
- Good flexibility, Easy to shape;
- Warranty: 5 years indoor, 3 years outdoor;
- Customization: multiple spec options, can be customized upon requirements.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NMF1616TS-Single color	DC24V	>90	2700K	915	94.6	9.84	140pcs/m	50mm	10000*16*16mm
			3500K	959	99.1				
			4000K	933	96.5				
			5000K	974	101.2				
			6000K	957	99.1				



Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

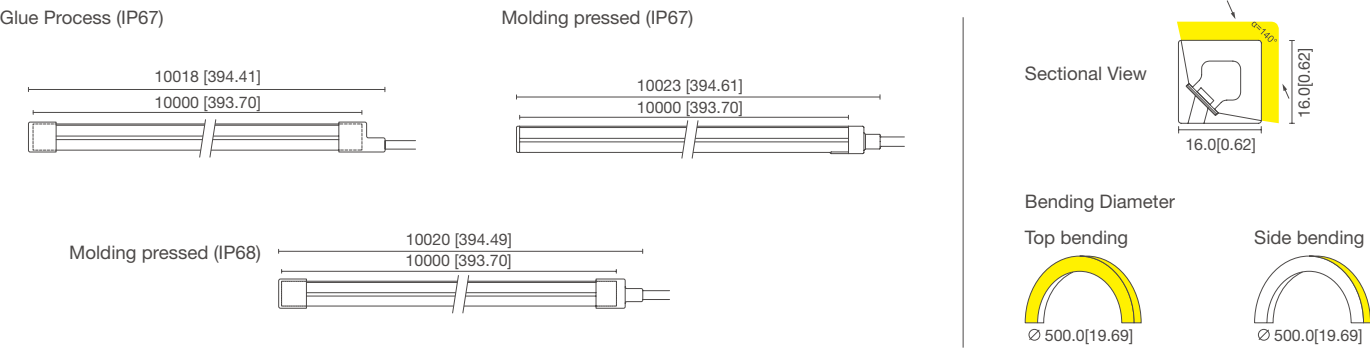

PHOTOMETRIC

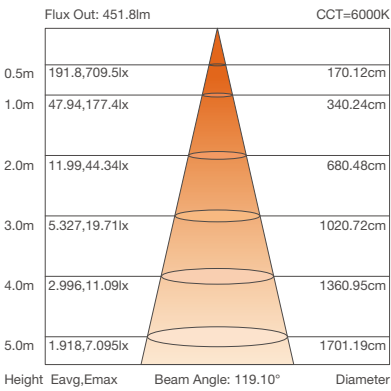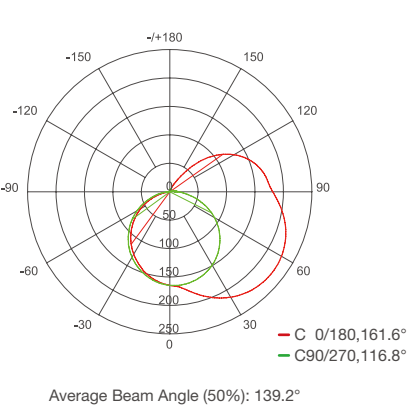

Note: the above two figures are tested with the sample NMF1616 TS at CCT 6000K, for other data, please consult sales rep.

NMF1010
3D-SERIES



- Color options: Single color;
- Good linear effect and better weather resistance;
- Can be bent on the top and side;
- Single feed, Max.5m;double feed, Max10m;
- Warranty: 5 years indoors, 3 years outdoors;
- Single color supports PWM, 0-10V, DALI dimming;
- A variety of specifications are available, support customization;




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NMF1010-Single color	DC24V	>90	2200-5000K	624	78	8	120pcs/m	50mm	5000*10*10.5mm
		\	Red	186	24				
		\	Green	635	70				
		\	Blue	116	15				
		\	Yellow	132	18				
		\	Orange	200	28				


Note: The data of 2200-5000K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

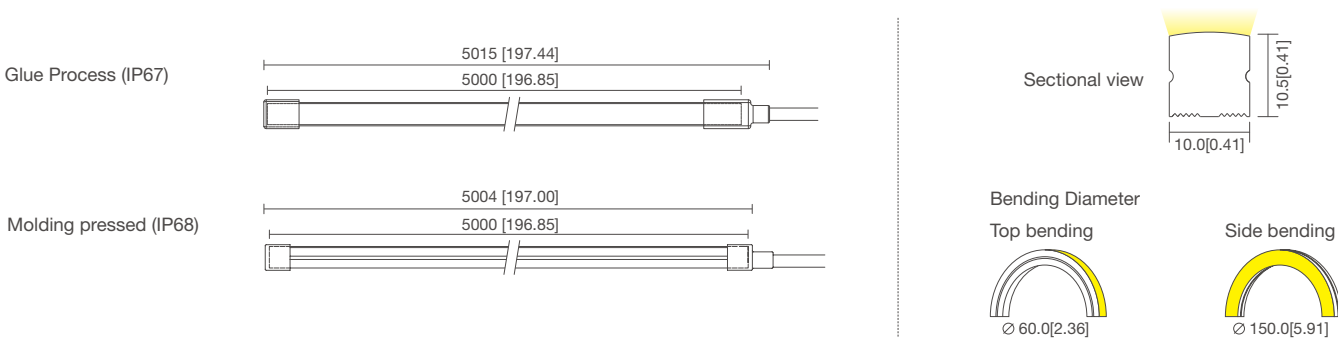

PHOTOMETRIC

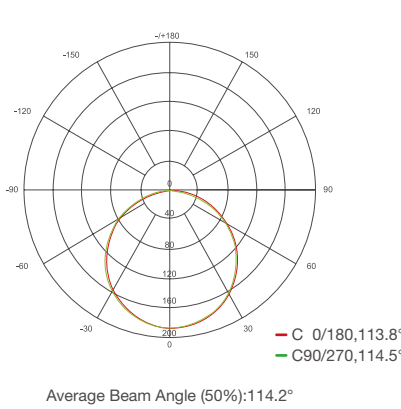

Note: above data tested with NMF1010-W at 2300K , for other data,please consult sales rep.

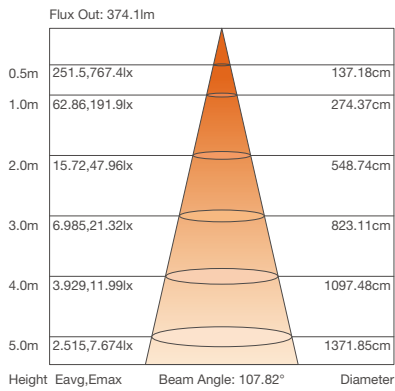

NMF1617-W
3D-SERIES



- Color options: Single color.
- Adopt high quality components with stable and reliable performance.
- 3D bending with good flexibility.
- Support 0~10V, DALI, PWM dimming.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NMF1617-W	DC24V	>90	2400K	820	68	12	140pcs/m	50mm	5000*16*17mm
			2700K	848	70				
			3000K	857	71				
			3500K	866	72				
			4000K	912	76				

Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

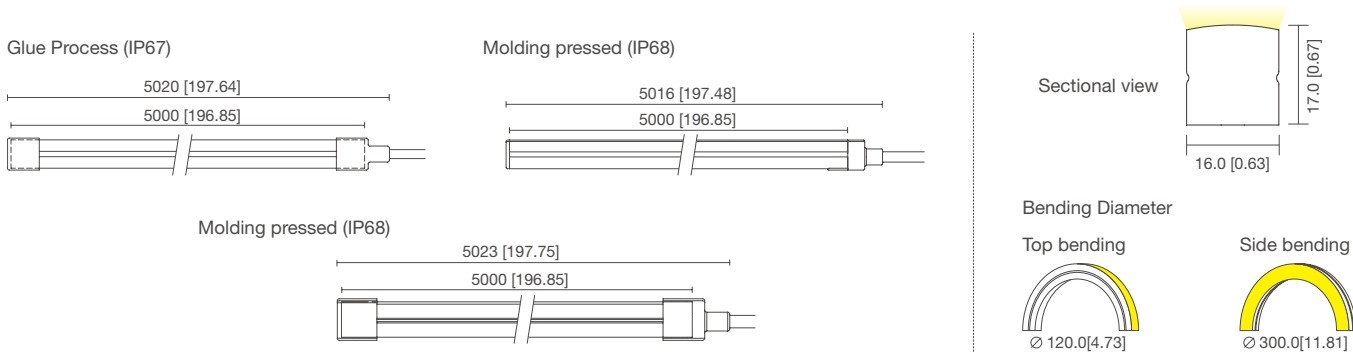

PHOTOMETRIC

360°

NEON FLEX


360° round-glowing
design, applicable to
space decoration lighting

NCR32

360° NEON



- Color options: Single color, RGB+W, Pixel
- 3in1 RGB+W, the CCT of white color is optional.
- 360° uniform light-emitting
- Can create rich light changes via a controller.
- Warranty: 5 years indoor.
- Customization: multiple spec options, can be customized upon requirements.

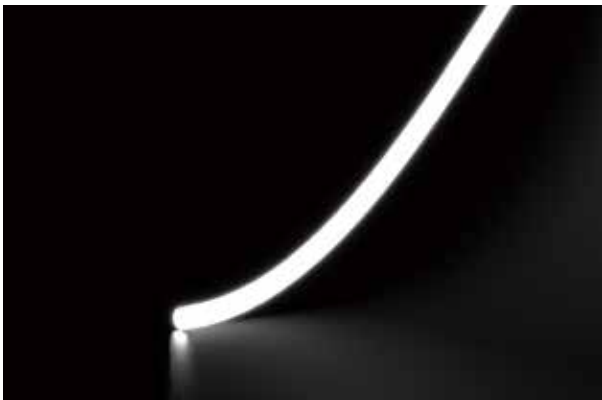

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NCR32-RGB+W	DC24V	>90	2700-6000K	307	50	6.05	336pcs/m	* 71.4mm	3000*32*32mm
		\	Red	95	15	6.05			
		\	Green	273	45	6.05			
		\	Blue	57	9	6.05			
		\	RGB+W	670	27	24.2			
NCR32-SPI-RGB+W	DC24V	>90	2700-6000K	280	34	8.06	336pcs/m	* 142.8mm	3000*32*32mm
		\	Red	75	9	8.06			
		\	Green	229	28	8.06			
		\	Blue	47	6	8.06			
		\	RGB+W	555	22	25.2			


Note: ☐ The data of 2700K-6000K is based on 4000K. ☐ For more information, please contact our sales representative.

* This product can only be cut during manufacturing at the factory. Custom lengths are available, but it cannot be cut by the customer after delivery.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP67)

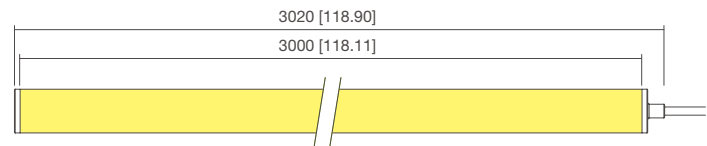


Sectional view



Bending Diameter




PHOTOMETRIC

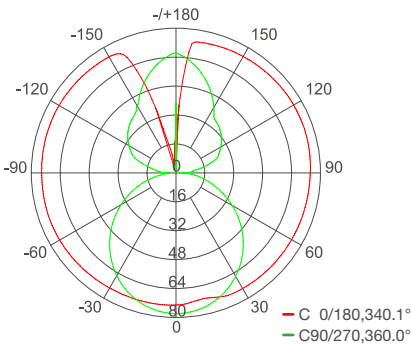

Average Beam Angle (50%):350.0°


Note: for other datas, please consult sales rep.

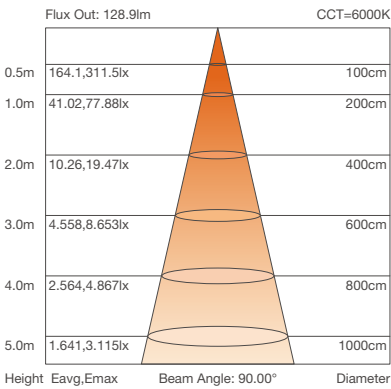

Height Eavg,Emax Beam Angle: 90.00° Diameter

NCR23

360° NEON



- Color options: Single color , RGB.
- Superior design with exquisite craftsmanship ensure stable and reliable performance.
- 360° uniform light-emitting.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.
- Single color supports PWM, 0-10V, DALI dimming.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NCR23-Single color	DC24V	>80	2400-6500K	1466	90.5	16	336pcs/m	35.7mm	5000*23*23mm
		\	Red	435	27.2				
		\	Green	1338	83.6				
		\	Blue	315	19.7				
		\	Yellow	201	12.6				
		\	Orange	393	24.6				


Note: ☐ The data of 2400K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

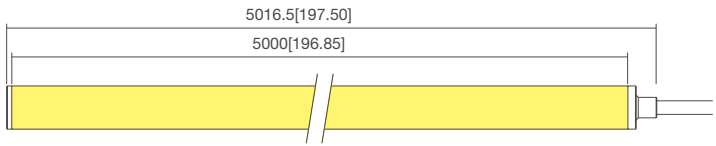


Sectional view



Bending Diameter




PHOTOMETRIC

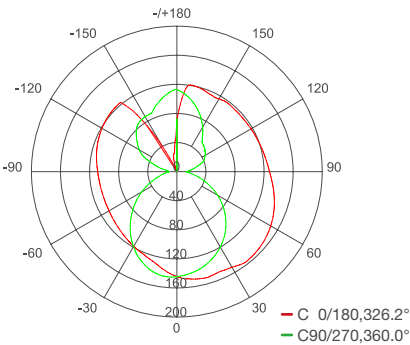

Average Beam Angle (50%): 343.1°

Note: for other datas, please consult sales rep.

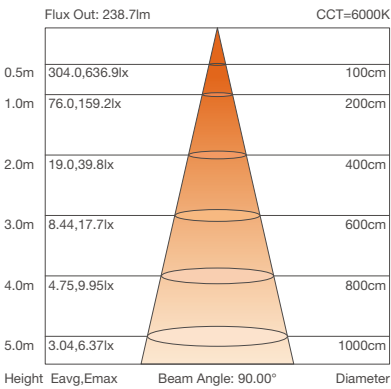

Height Eavg,Emax Beam Angle: 90.00° Diameter

NCR23H
360° NEON



- Color options: Single color.
- Strong weather resistance.
- 360° light-emitting with good flexibility.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NCR23H-K	DC24V	>90	● 2400K	2112	132	16	360pcs/m	50mm	3000*23*23mm
			● 3000K	2240	140				
			● 3500K	2336	146				
			● 4500K	2352	147				
			○ 6000K	2320	145				
NCR23H-Z	DC24V	>90	● 2400K	2000	125	16	320pcs/m	50mm	5000*23*23mm
			● 3000K	2032	127				
			● 3500K	2080	130				
			● 4500K	2064	129				


Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

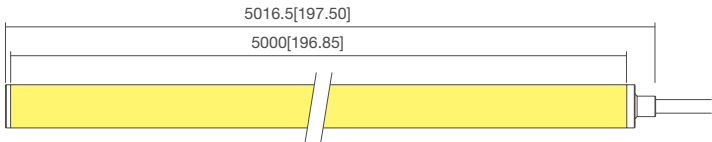



Sectional view



Bending Diameter



PHOTOMETRIC

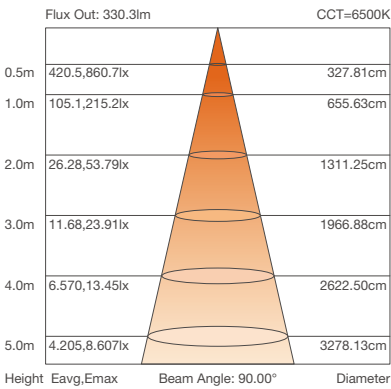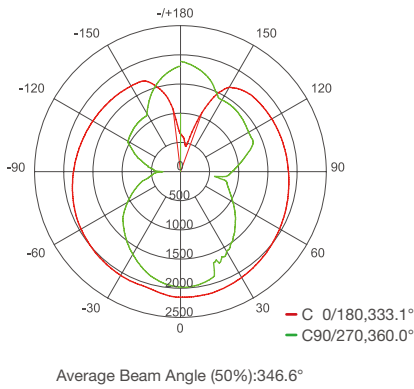

Note: the above data is based on NCR23H_K. For other data, please consult sales rep.

NCR23A
360° NEON



- Color options: single color.
- Short cutting design, arbitrary cutting without large dark areas.
- 360° light-emitting with good flexibility.
- Warranty: 5 years indoor
- Single color supports PWM, 0-10V, DALI dimming.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NCR23A-Single color	DC24V	>90	● 2500K	1040	65	16	336pcs/m	5.95mm	5000*23*23mm
			● 2700K	1072	67				
			● 3000K	1088	68				
			● 3500K	1120	70				
			○ 4500K	1088	68				
			○ 5500K	1104	69				


Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

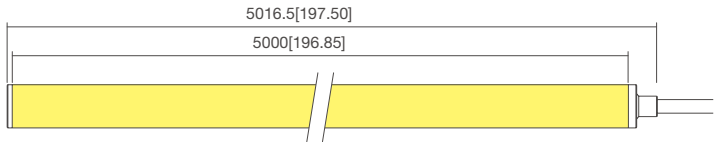



Sectional view



Bending Diameter




PHOTOMETRIC

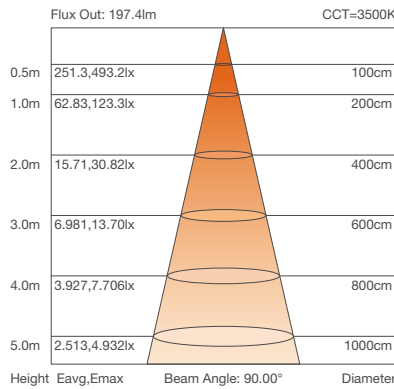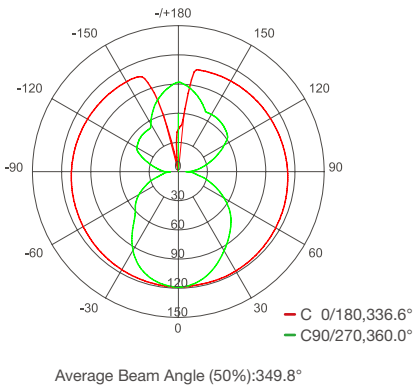

Note: The above two pictures are tested with the sample NCR23A at 3500K. For more info, please contact sales rep.

NCR23S

360° NEON



- Color options: single color.
- Built-in styling strips, can be shaped freely.
- 360° light-emitting with good flexibility.
- Designo polish, eliminate the annoyance of dirt.
- Warranty: 5 years indoor, 3 years outdoor.
- Single color supports PWM, 0-10V, DALI dimming.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NCR23S-Single color	DC24V	>80	2400-6500K	1344	84	16	336pcs/m	35.71mm	3000*23*23mm
		\	Red	435	27.2				
		\	Green	1338	83.6				
		\	Blue	315	19.7				
		\	Yellow	201	12.6				
		\	Orange	393	24.6				


Note: □ The data of 2400K-6500K is based on 4000K. □ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

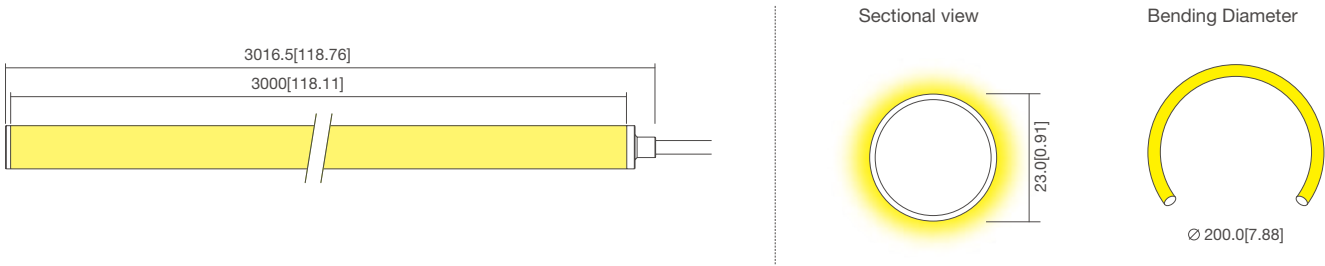


PHOTOMETRIC

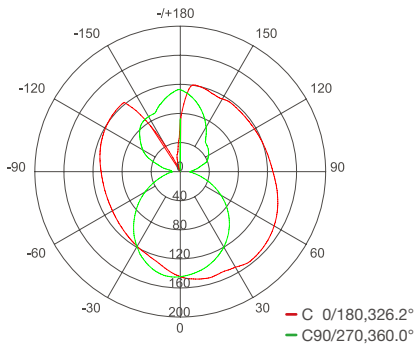

Average Beam Angle (50%):343.1°

Note: for other datas, please consult sales rep.

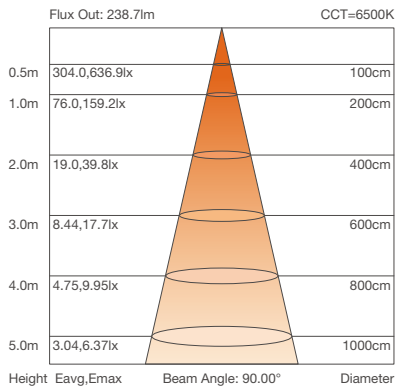

NCR23L

360° NEON



- Color options: Single color.
- One power end 10m max run.
- Strong weather resistance.
- 360° light-emitting with good flexibility.
- Warranty: 3 years.
- Customization: multiple spec options, can be customized upon requirements.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NCR23L-Single color	DC24V	>90	3500K	1040	65	16	336pcs/m	5.95mm	10000*23*23mm
			4500K	1072	67				
			5500K	1088	68				
			6500K	1120	70				


Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

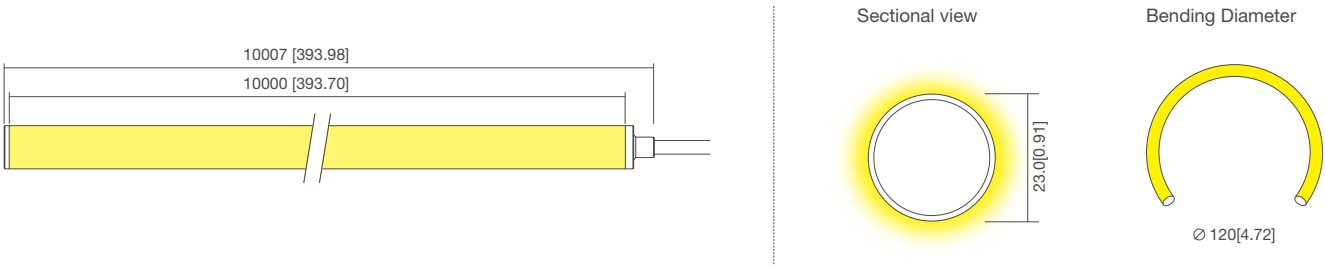


PHOTOMETRIC

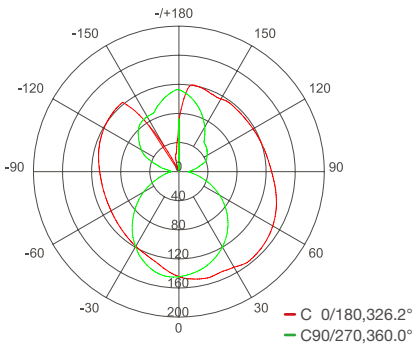


Average Beam Angle (50%):343.1°

Note: for other datas, please consult sales rep.

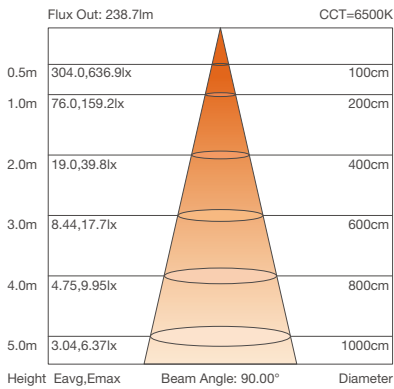

NCR13-COB
360° NEON



- Color options: white
- Superior design with exquisite craftsmanship ensure stable and reliable performance.
- 360° light-emitting with uniform light.
- Bendable with good flexibility, strong weather resistance.
- Single color supports PWM, 0-10V, and DALI dimming.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
NCR13-COB-Single color	DC24V	>90	2700K	1062	62	16	640pcs/m	\	5000*13*13mm
			3500K	1158	68				
			5500K	1085	67				

Note: For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch

Glue Process (IP67)

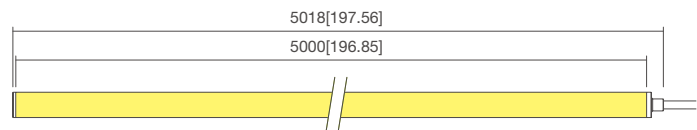



Sectional view



Bending Diameter



PHOTOMETRIC

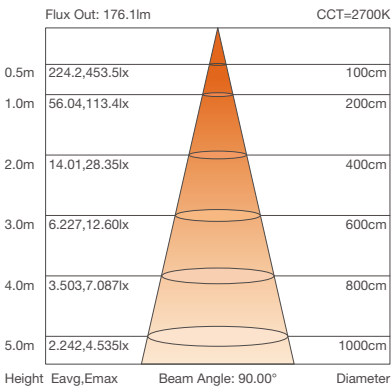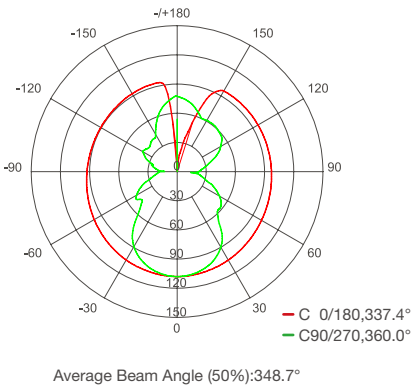


Note: the above two figures are tested with the sample 2700K, for other datas, please consult sales rep.

HIGH
VOLTAGE

High-voltage design with stable output
for largescale outlines and architectural
lighting projects.

HIGH VOLTAGE



AN2-4
HIGH VOLTAGE SERIES



- Color options: single color
- Superior design with exquisite craftsmanship ensure stable and reliable performance
- Side bending with good flexibility
- Adopt silicone extrusion molding pressed
- Warranty: 5 years indoor, 3 years outdoor



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
AN2-4-Single color	220V AC	>80	2300K	534	55	10	120pcs/m	500mm	50000*10*25mm
		>80	3000K	497	51				
		>80	2800-9000K	510	52				
		\	Red	230	24				
		\	Green	420	44				
		\	Blue	90	9				
		\	Yellow	650	67				

Note: for more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

Molding pressed (IP68)

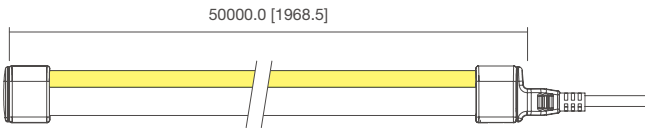


Note: for more information, please contact our sales representative.


Sectional view




Bending Diameter




PHOTOMETRIC

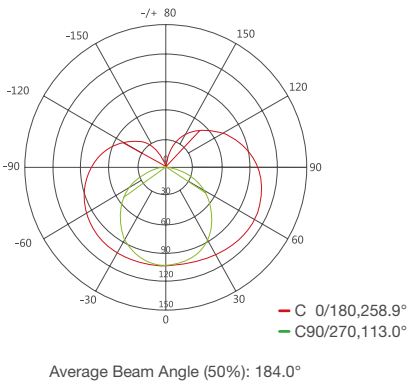

Note: The above figure is based on the test results of a 1m long product at CCT 7400K

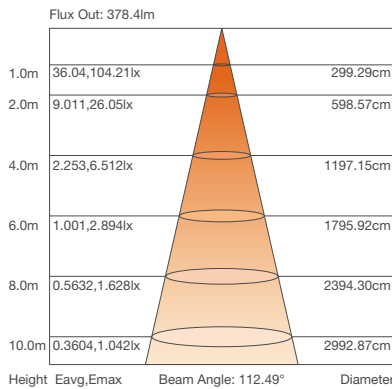

AWHE1608-D
HIGH VOLTAGE SERIES

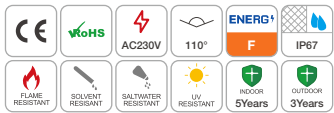

- Color options: Single color
- High voltage neon with power supply kit
- AC176~264V input
- **ErP class-F, CE passed**
- High brightness, uniform light-emitting
- Single feed max run 40m
- Warranty: 5 years indoors, 3 years outdoors



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
AWHE1608-D-Single color	AC 230V	>80	2300-6500K	1011	110	8	88pcs/m	500mm	40000*16*7.5mm
		\	Red	133	14				
		\	Green	828	89				
		\	Blue	164	17				
		\	Yellow	1102	118				
		\	Orange	429	44				
		\							

Note: ☐ The data of 2300K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP67)

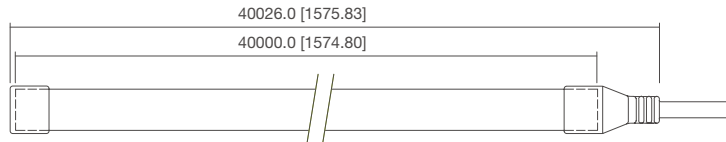


Sectional view




Bending Diameter

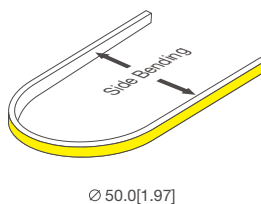

PHOTOMETRIC

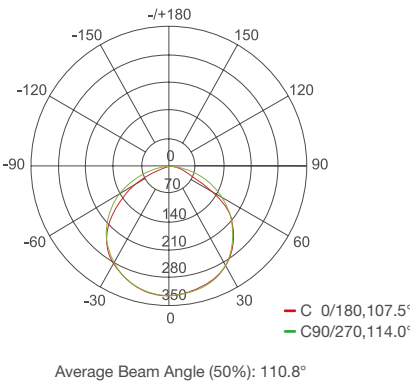

Note: above data tested with AWHE1608-D at 2300K , for other data,please consult sales rep.

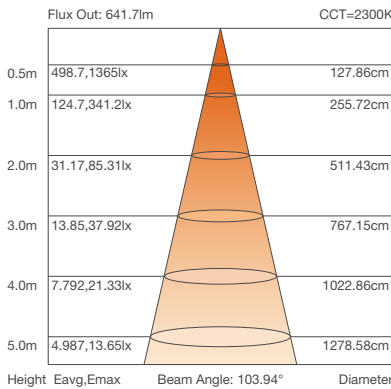

AWHE1707
HIGH VOLTAGE SERIES



- ETL PASS
- AC120V direct connection; plug and play without external driver.
- Top bending and easy to shape.
- Max 50m running length with one power end.
- Multiple specifications, support customization.
- Warranty: 5 years



OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
AWHE1707-Single color	120V AC	>90	● 3000K	1322	93	14.1	80pcs/m	100mm	50000*17*7mm
			● 4000K	1450	102				
			● 5000K	1446	102				

Note: for more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP65)

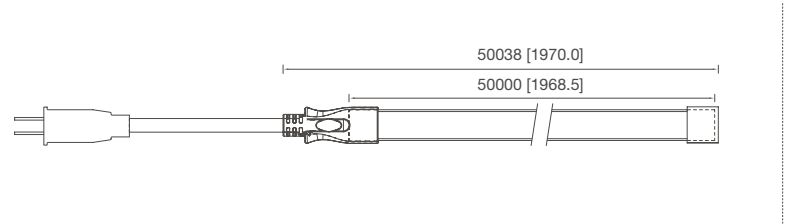



Sectional view



Bending Diameter




PHOTOMETRIC

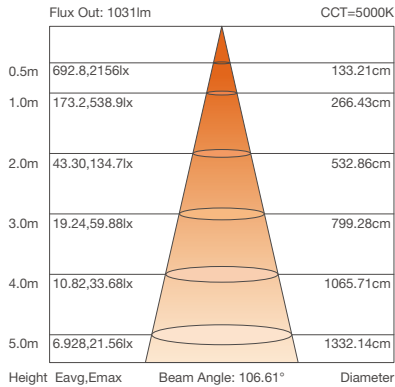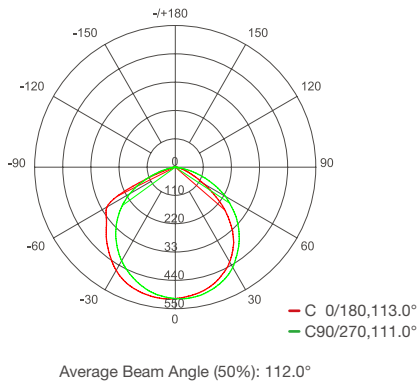

Note: the above two figures are tested with the sample AWHE1107 at CCT 5000K, for other data, please consult sales rep.

ASN2-3
HIGH VOLTAGE SERIES

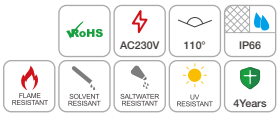

- High Brightness.
- 25m long run length with one power end.
- Top bending with good flexibility.
- Unique extrusion process and design to adapt to various complex environment.
- No external power supply required; plugs directly into AC 230V.
- Short cutting unit for flexible length customization.
- Can be customized upon requirements.



HIGH VOLTAGE

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
ASN2-3-Single color	230V AC	>90	● 2700K	1215	101	12	120pcs/m	100mm	25000*11*6.5mm
			● 3000K	1252	104				
			● 4000K	1393	116				
			● 5000K	1385	115				
			● 6000K	1284	107				

Note: for more information, please contact our sales representative.


PROFILE DRAWINGS

Unit:mm/inch


Glue Process (IP66)

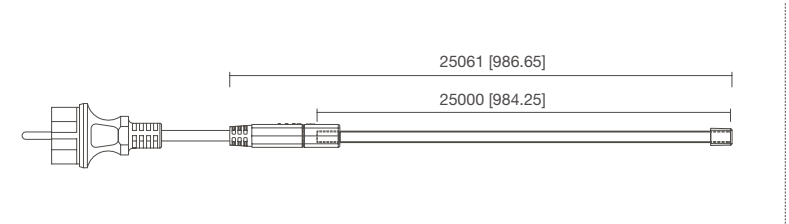



Sectional view



Bending Diameter



PHOTOMETRIC

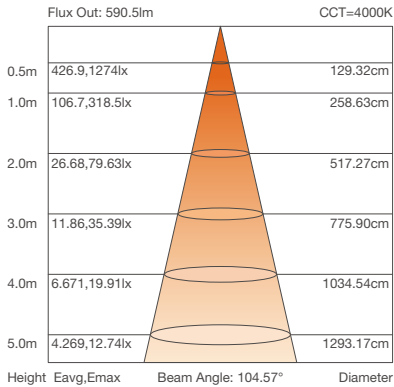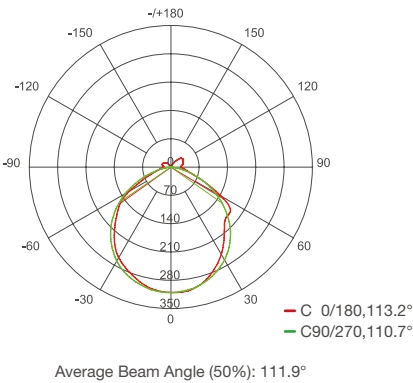

Note: the above two figures are tested with the sample ASN2-3 at 4000K, for other data, please consult sales rep.



UNDERWATER NEON

Widely used in various shallow-water settings such as swimming pools, decorative ponds, landscape lakes, etc.

Max installation depth: ≤3 m.

UMF2020(L)
UNDERWATER NEON



- Chlorine-resistant & salt-corrosion-resistant, ideal for long-term use in shallow-water environments.
- Special craftsmanship allows free bending and twisting without damaging the PCB or electronics.
- Enhanced waterproof structure ensures reliable performance and durability under continuous shallow-water exposure.
- Custom lengths available; product is non-cuttable.
- Certified to UL676.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
UMF2020(L)-Single color	DC24V	>90	2700K	530	46	11.52	96pcs/m	20.83mm	20000*20*20mm
			3000K	541	47				
			3500K	553	48				
			4000K	576	50				
			5000K	576	50				



Note: for more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

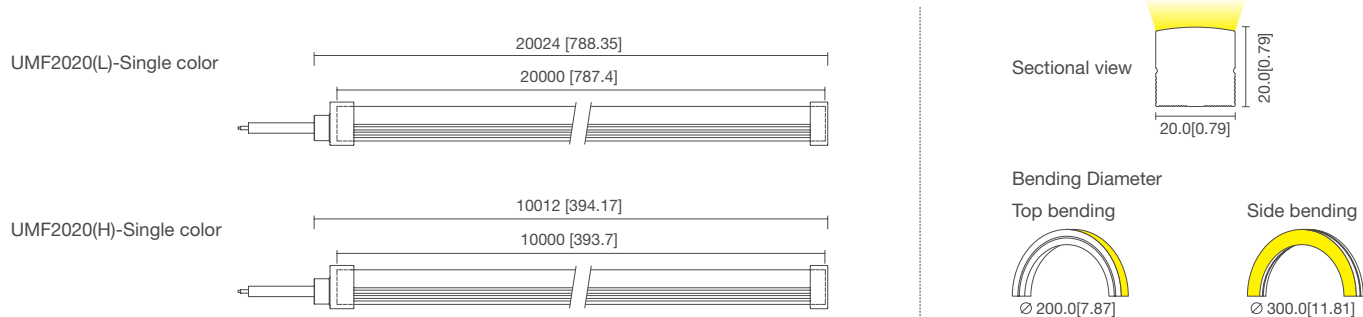

PHOTOMETRIC

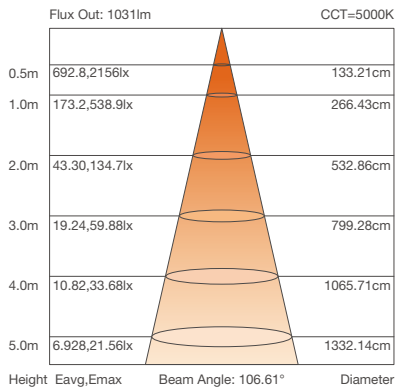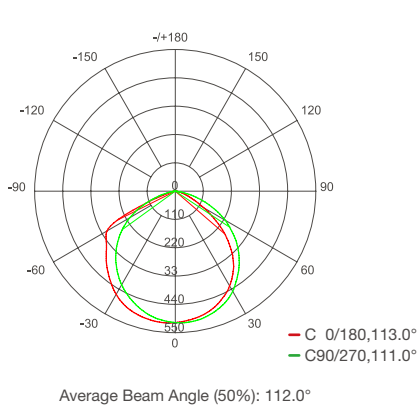

Note: the above two figures are tested with the sample UMF2020 at CCT 5000K, for other data, please consult sales rep.

UMF2020(H)
UNDERWATER NEON



- Chlorine-resistant & salt-corrosion-resistant, ideal for long-term use in shallow-water environments.
- Special craftsmanship allows free bending and twisting without damaging the PCB or electronics.
- Enhanced waterproof structure ensures reliable performance and durability under continuous shallow-water exposure.
- Custom lengths available; product is non-cuttable.
- Certified to UL676.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
UMF2020(H)-Single color	DC24V	>90	2700K	726	42	17.28	120pcs/m	16.67mm	10000*20*20mm
			3000K	743	43				
			3500K	760	44				
			4000K	778	45				
			5000K	778	45				



Note: for more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

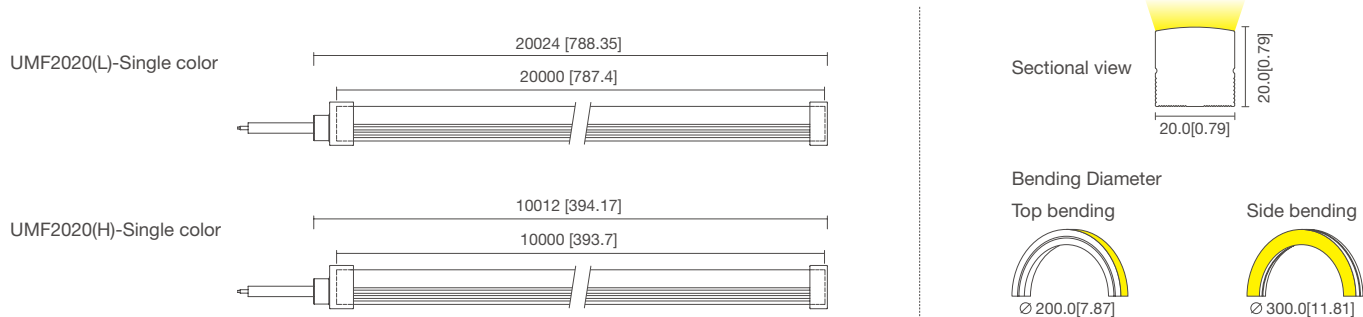

PHOTOMETRIC

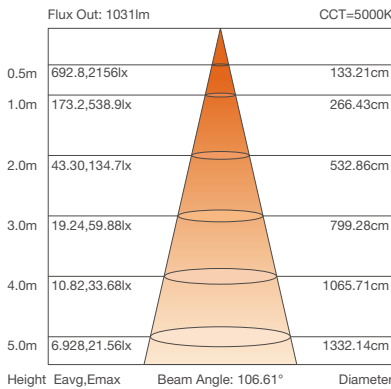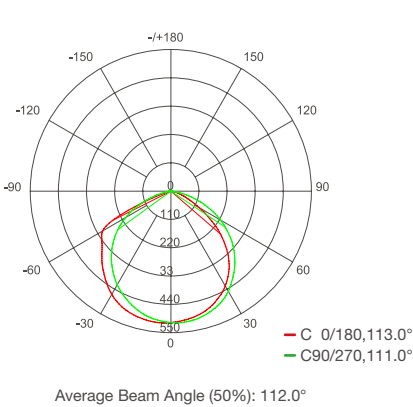

Note: the above two figures are tested with the sample UMF2020 at CCT 5000K, for other data, please consult sales rep.

UMF2222-WN
UNDERWATER NEON



- Chlorine-resistant & salt-corrosion-resistant, ideal for long-term use in shallow-water environments.
- Special craftsmanship allows free bending and twisting without damaging the PCB or electronics.
- Enhanced waterproof structure ensures reliable performance and durability under continuous shallow-water exposure.
- Custom lengths available; product is non-cuttable.
- Certified to UL676.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
UMF2222-WN	DC24V	>90	● 2700K	295	41	7.2	168pcs/m	23.81mm	10000*22*22mm
			○ 6000K	345	48	7.2			
			● W+N	648	45	14.4			


Note: for more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

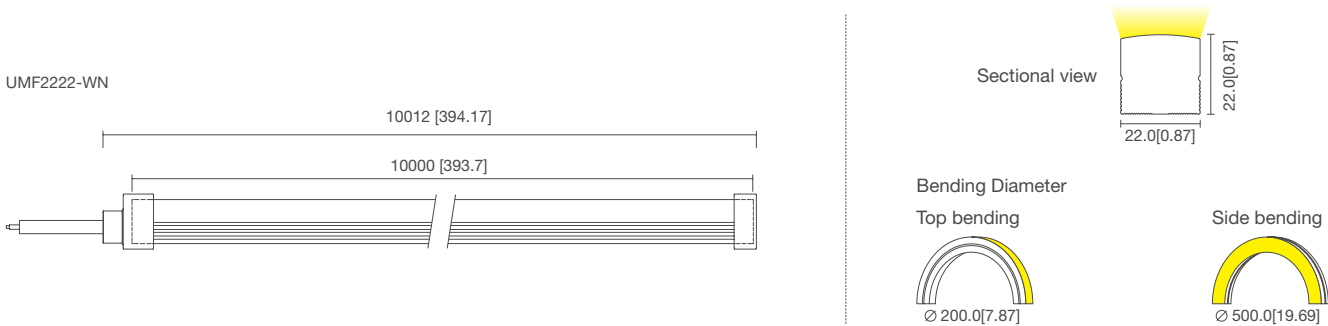

PHOTOMETRIC

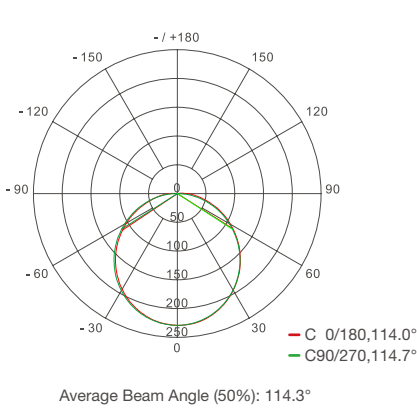

Note: the above two figures are tested with the sample UMF2222-WN, for other data, please consult sales rep.

UMF2222-RGB
UNDERWATER NEON



- Chlorine-resistant & salt-corrosion-resistant, ideal for long-term use in shallow-water environments.
- Special craftsmanship allows free bending and twisting without damaging the PCB or electronics.
- Enhanced waterproof structure ensures reliable performance and durability under continuous shallow-water exposure.
- Custom lengths available; product is non-cuttable.
- Certified to UL676.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
UMF2222-RGB	DC24V	\	● Red	138	27	5.12	84pcs/m	35.71mm	15000*22*22mm
			● Green	230	45	5.12			
			● Blue	25	5	5.12			
			● RGB	399	26	15.36			


Note: for more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

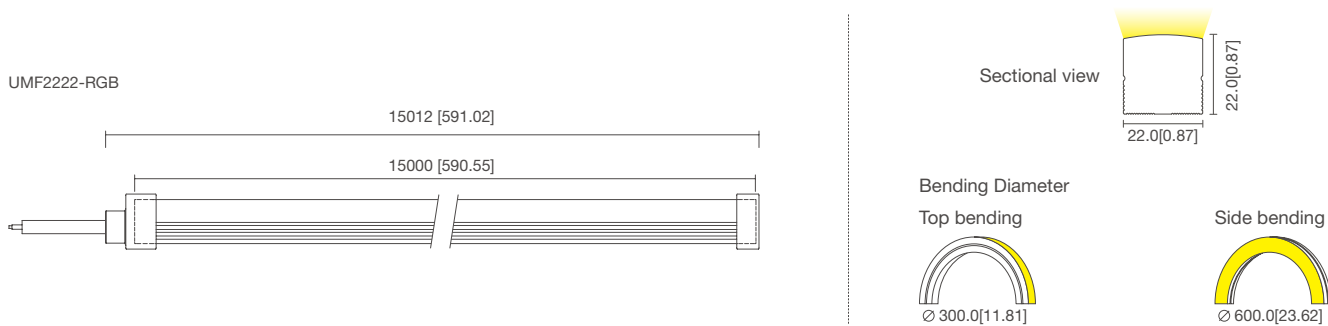

PHOTOMETRIC

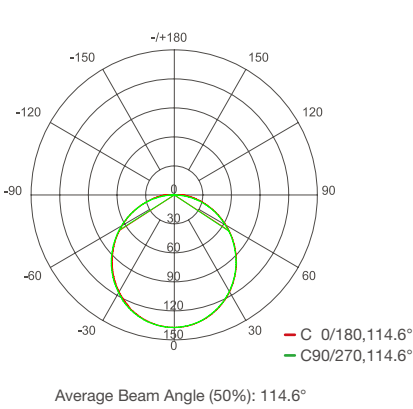

Note: the above two figures are tested with the sample UMF2222-RGB, for other data, please consult sales rep.

UMF2222-RGBW

UNDERWATER NEON



- Chlorine-resistant & salt-corrosion-resistant, ideal for long-term use in shallow-water environments.
- Special craftsmanship allows free bending and twisting without damaging the PCB or electronics.
- Enhanced waterproof structure ensures reliable performance and durability under continuous shallow-water exposure.
- Custom lengths available; product is non-cuttable.
- Certified to UL676.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
UMF2222-RGBW	DC24V	>90	2700-5000K	247	43	5.76	72pcs/m	41.67mm	3000*32*32mm
		\	Red	119	26	4.60			
		\	Green	216	47	4.60			
		\	Blue	27	6	4.60			
		\	RGBW	607	31	19.85			


Note: ☐ The data of 2700K-5000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

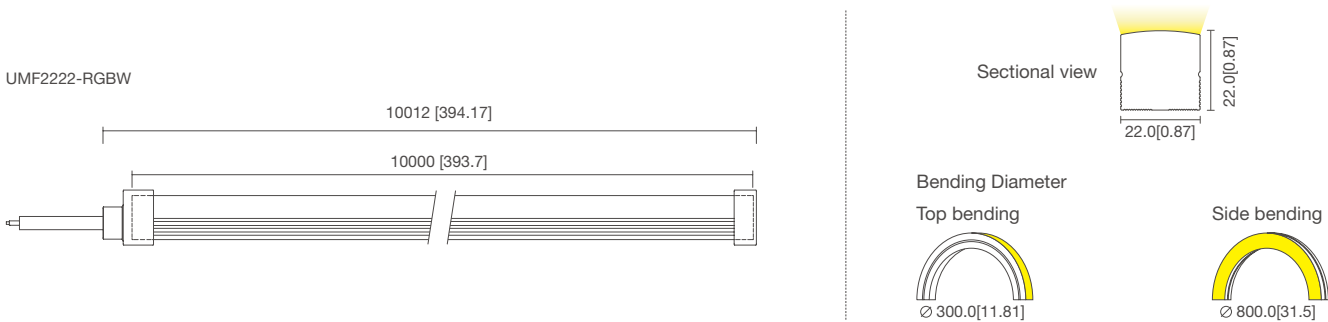

PHOTOMETRIC

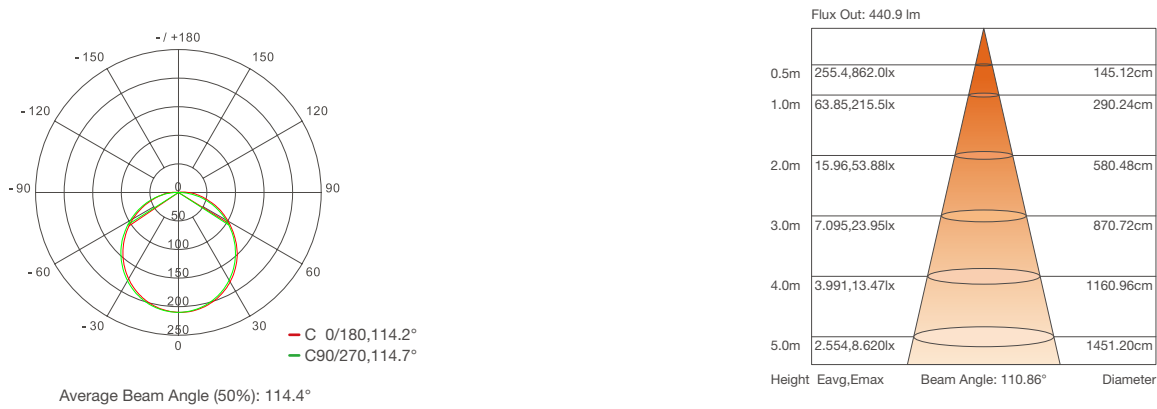

Note: the above two figures are tested with the sample UMF2222-RGBW, for other data, please consult sales rep.

UMF2222-PTW-WN

UNDERWATER NEON



- Chlorine-resistant & salt-corrosion-resistant, ideal for long-term use in shallow-water environments.
- Special craftsmanship allows free bending and twisting without damaging the PCB or electronics.
- Enhanced waterproof structure ensures reliable performance and durability under continuous shallow-water exposure.
- Custom lengths available; product is non-cuttable.
- Certified to UL676.




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
UMF2222-PTW-WN	DC24V	>90	2700K	56	28	2.0	168pcs/m	23.81mm	10000*22*22mm
			6000K	432	30	14.4			
			W+N	216	30	7.2			


Note: for more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

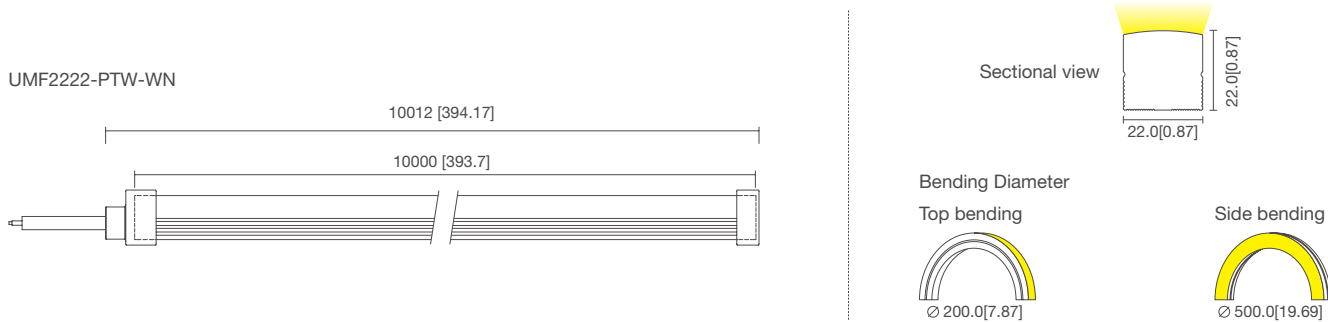

PHOTOMETRIC

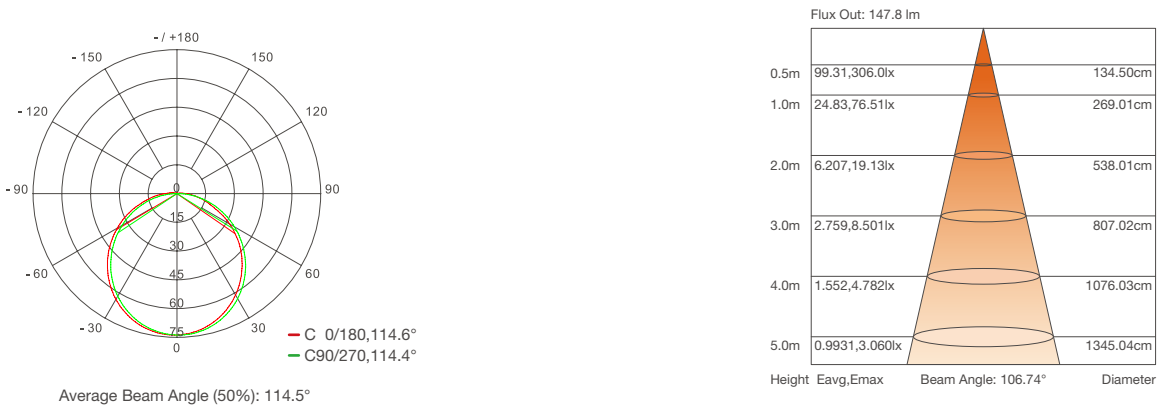

Note: the above two figures are tested with the sample UMF2222-PTW-WN, for other data, please consult sales rep.

UMF2222-SPI
UNDERWATER NEON



- SPI control.
- Chlorine-resistant & salt-corrosion-resistant, ideal for long-term use in shallow-water environments.
- Special craftsmanship allows free bending and twisting without damaging the PCB or electronics.
- Enhanced waterproof structure ensures reliable performance and durability under continuous shallow-water exposure.
- Custom lengths available; product is non-cuttable.
- Certified to UL676.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
UMF2222-SPI- RGBW	DC24V	>90	2700-5000K	138	17	8.11	60pcs/m	50mm	10000*22*22mm
		\	Red	81	10	8.11			
		\	Green	154	19	8.11			
		\	Blue	16	2	8.11			
		\	RGBW	378	21	18.0			



Note: ☐ The data of 2700K-5000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

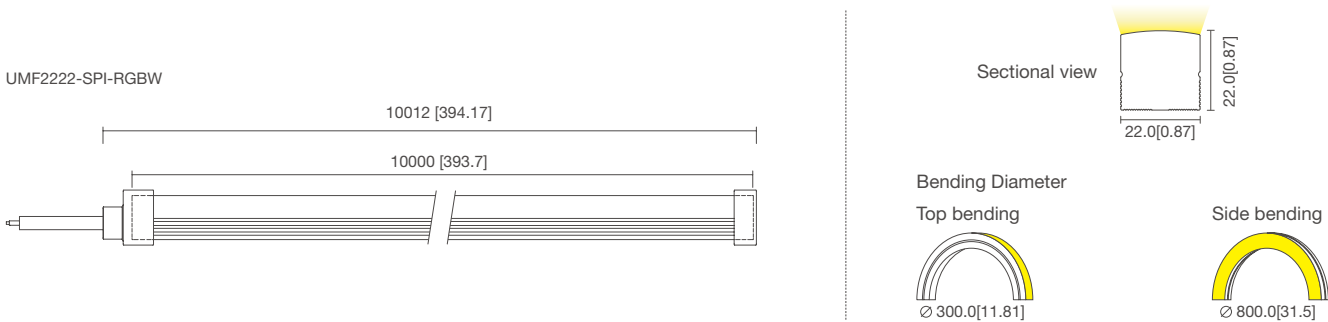

PHOTOMETRIC

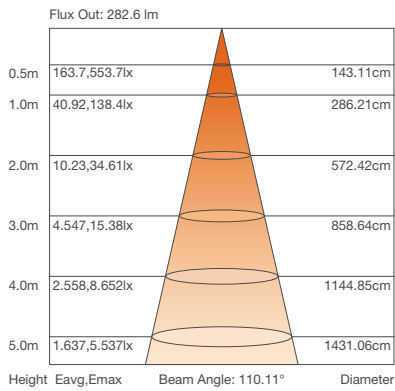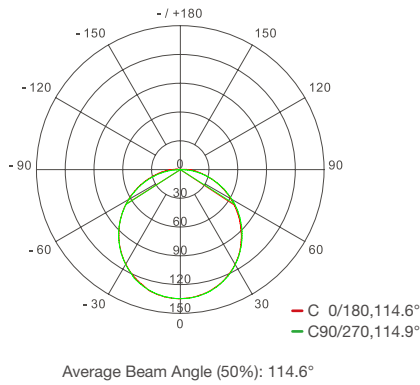

Note: the above two figures are tested with the sample UMF2222-SPI-RGBW, for other data, please consult sales rep.

UMF2222-DMX
UNDERWATER NEON



- DMX control.
- Chlorine-resistant & salt-corrosion-resistant, ideal for long-term use in shallow-water environments.
- Special craftsmanship allows free bending and twisting without damaging the PCB or electronics.
- Enhanced waterproof structure ensures reliable performance and durability under continuous shallow-water exposure.
- Custom lengths available; product is non-cuttable.
- Certified to UL676.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
UMF2222-DMX- RGBW	DC24V	>90	2700-5000K	162	19	8.52	60pcs/m	50mm	10000*22*22mm
		\	Red	102	12	8.52			
		\	Green	179	21	8.52			
		\	Blue	25	3	8.52			
		\	RGBW	452	23	19.68			



Note: ☐ The data of 2700K-5000K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

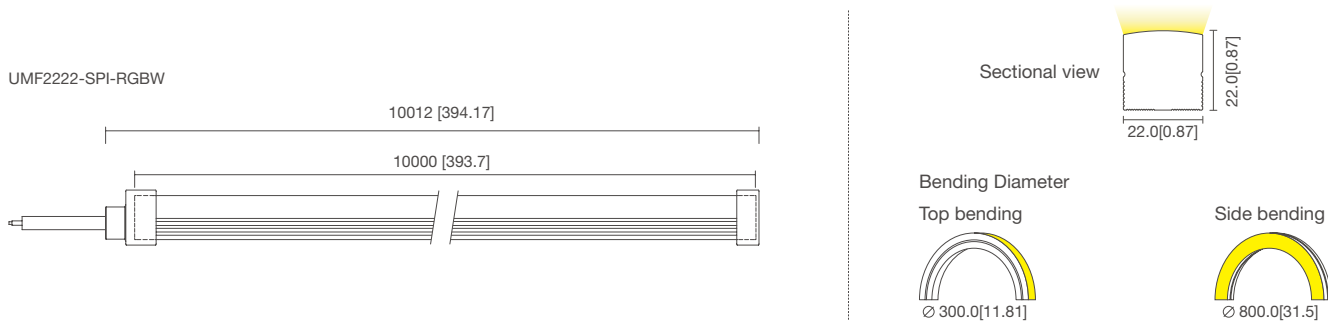

PHOTOMETRIC

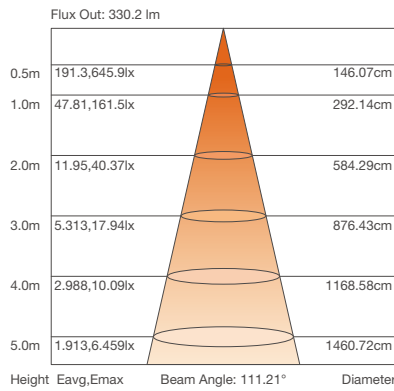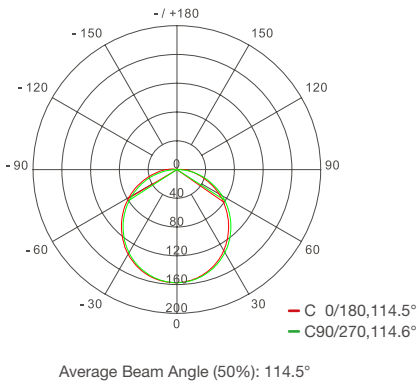

Note: the above two figures are tested with the sample UMF2222-DMX-DMX, for other data, please consult sales rep.

FLEXIBLE WALL WASHER

Flexible wall washer design, bends freely to fit curved facades and irregular surfaces, delivering smooth and uniform wall-washing effects.



P2-8
FLEXIBLE WALL WASHER



- Color options: single color, multi color, pixel.
- Optical lens design with good flexibility
- Suitable for wall washing and small space lighting
- Cuttable and easy to install
- Great decay performance, longer lifespan
- Support PWM dimming
- Multiple beam angles, CCT, and specifications are available


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
P2-8-2835-40-24-R	DC24V	\	Red	528	33	8.11	40pcs/m	50mm	5010*24*17mm
P2-8-2835-40-24-G	DC24V	\	Green	1088	68	8.11			
P2-8-2835-40-24-B	DC24V	\	Blue	240	15	8.11			
P2-8-3030-40-24	DC24V	>80	2700-6500K	1920	120	16	40pcs/m	50mm	5010*24*17mm
		>90	2700-6500K	1696	106	16			
P2-8-5050-40-24-WN	DC24V	>80	2700K	560	70	8	40pcs/m	50mm	5010*24*17mm
		>80	6500K	600	75	8			
		\	W+N	1152	72	16			
P2-8-5050-36-24-RGB	DC24V	\	Red	222	39	5.7	36pcs/m	83.33mm	5010*24*17mm
			Green	285	50	5.7			
			Blue	39	7	5.7			
			RGB	510	30	17			
P2-8-F5050-36-24-RGBW	DC24V	>90	4000K	291	55	5.3	36pcs/m	83.33mm	5010*24*17mm
		\	Red	206	39	5.3			
		\	Green	265	50	5.3			
		\	Blue	37	7	5.3			
		\	RGB	474	30	15.8			
		\	RGBW	777	37	21			

Note: The data of 2700K-6500K is based on 4000K. For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

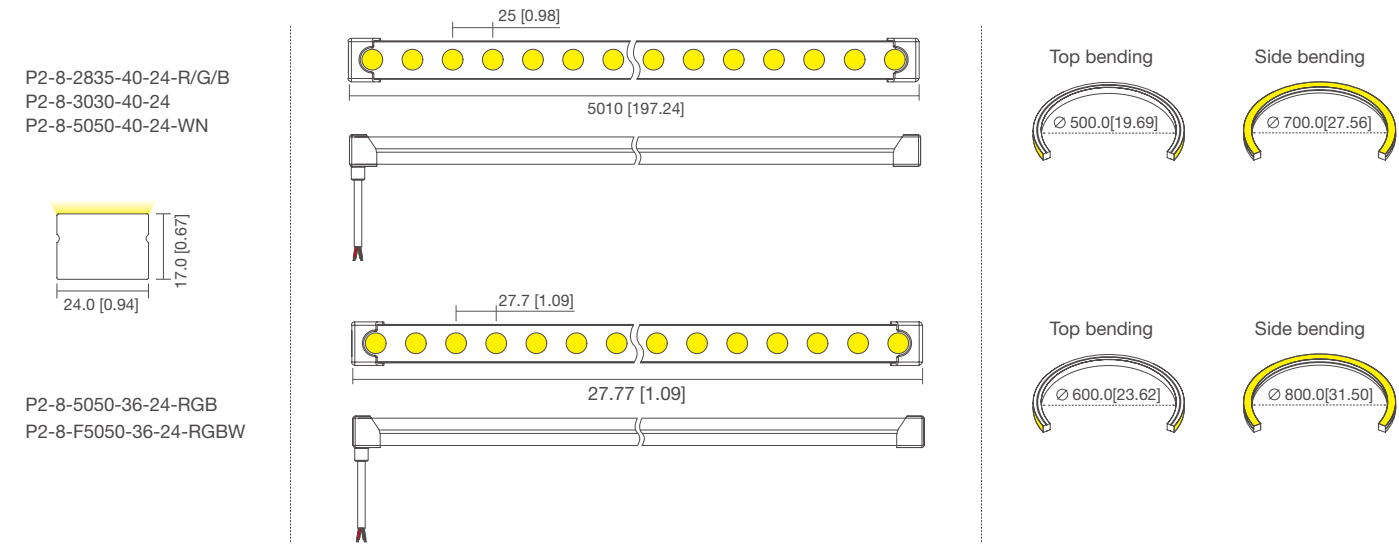

P2-8
FLEXIBLE WALL WASHER



- Color options: single color, multi color, pixel.
- Optical lens design with good flexibility
- Suitable for wall washing and small space lighting
- Cuttable and easy to install
- Great decay performance, longer lifespan
- Support PWM dimming
- Multiple beam angles, CCT, and specifications are available


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
P2-8-5050-36-24-RGB-SPI	DC24V	\	Red	192	24	8	36pcs/m	83.33mm	5010*24*17mm
			Green	264	33	8			
			Blue	40	5	8			
			RGB	500	27	18.5			
P2-8-5050-36-24-RGB-SPI	DC24V	\	Red	192	24	8	36pcs/m	83.33mm	5010*24*17mm
			Green	264	33	8			
			Blue	40	5	8			
			RGB	500	27	18.5			
P2-8-5050-36-24-RGBW-SPI	DC24V	>90	4000K	272	34	8	36pcs/m	83.33mm	5010*24*17mm
		\	Red	192	24	8			
		\	Green	264	33	8			
		\	Blue	40	5	8			
		\	RGBW	755	32	23.6			
P2-8-5050-36-24-RGBW-SPI	DC24V	>90	4000K	272	34	8	36pcs/m	83.33mm	5010*24*17mm
		\	Red	192	24	8			
		\	Green	264	33	8			
		\	Blue	40	5	8			
		\	RGBW	755	32	23.6			
		\	RGBW	755	32	23.6			

Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

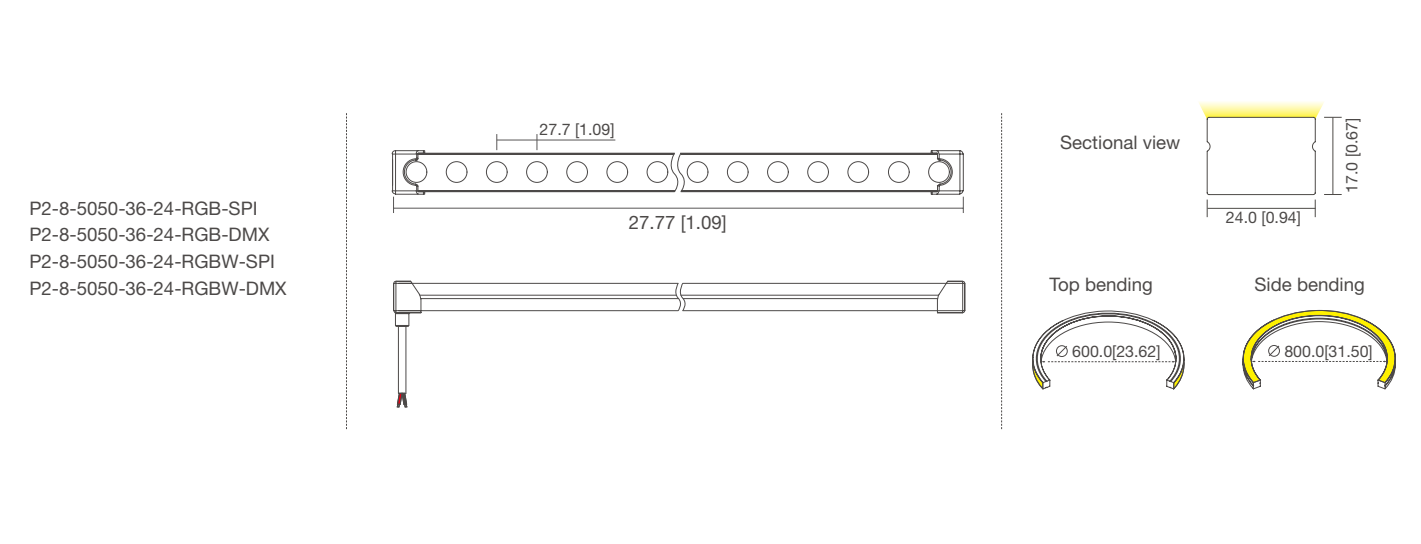

P2-8 Pro
FLEXIBLE WALL WASHER



- Light emission distance up to 5m.
- 3D bending and easy to install.
- Long lifespan with great lumen maintenance.
- Multiple beam angles, CCT, and specifications are available.



OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
P2-8 Pro	DC24V	>80	2700K	1866	96	19.44	24pcs/m	33.33mm	5000*30*22mm
			3000K	1944	100				
			3500K	1944	100				
			4000K	2002	103				
			6500K	2002	103				


Note: For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

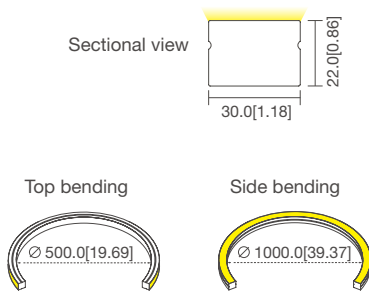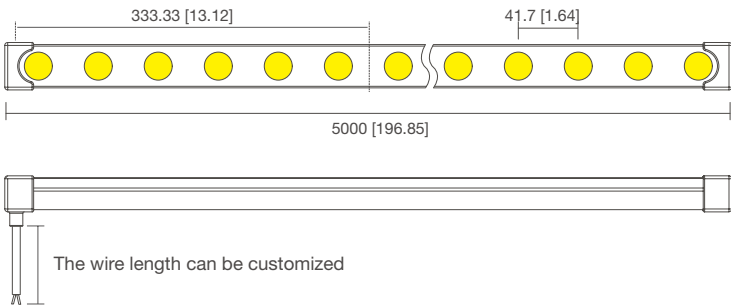


PHOTOMETRIC

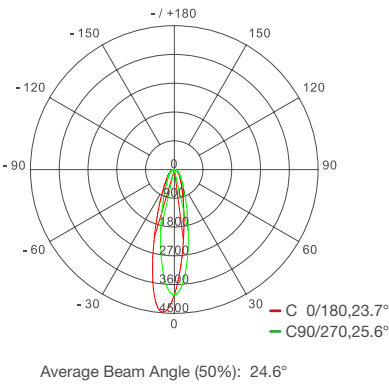

Note: above data tested with P2-8 PRO-3000K+8°. For other data,please consult sales rep.

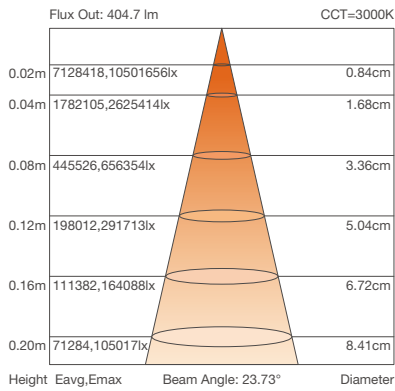

WHE2014
FLEXIBLE WALL WASHER

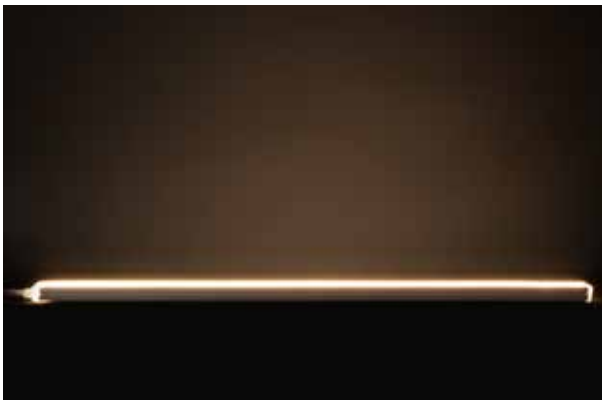

- Flexible and top bendable.
- Excellent waterproof performance.
- Uniform lighting, no dark spots.
- Cuttable and support customization.
- Warranty: 5 years indoor, 3 years outdoor.
- Suitable for wall washing and small space application.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
WHE2014-Single color	DC24V	>90	3000K	1779	103	17.28	140pcs/m	50mm	10000*20*14mm
			3500K	1797	104				
			4000K	1892	109				
			6000K	1854	107				


Note: For more information, please contact our sales representative.

PROFILE DRAWINGS


Unit:mm/inch

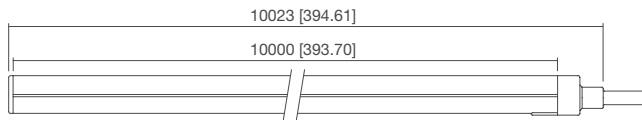

BEAM ANGLE



PHOTOMETRIC

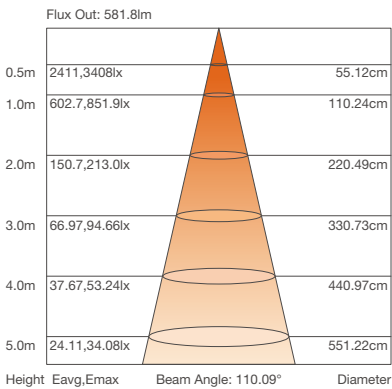

SFO1616
FLEXIBLE WALL WASHER



- Adopt professional lens,with good flexibility, suitable for wall washing
- Combined module and silicone tube, with good weatherability
- Great brightness maintenance, long life span
- Top bend and side bend combined into one
- Single color supports PWM, 0-10V, DALI dimming




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
SFO1616-3030-48-24	DC24V	>80	🟡 2700-6500K	1952	122	16	48pcs/m	41.7mm	5000*16*16mm
		>90	🟡 2700-6500K	1664	104				
SFO1616-2835-48-24	DC24V	\	🔴 Red	512	32	16	48pcs/m	41.7mm	5000*16*16mm
			🟢 Green	1120	70				
			🔵 Blue	240	15				
SFO1616-3030-60-24-WN	DC24V	>90	🟡 2700K	747	122	9	48pcs/m	66.67mm	5000*16*16mm
		>90	⬜ 6500K	828	122	9			
		\	🟡 W+N	1584	104	18			

Note: ☐ The data of 2700K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

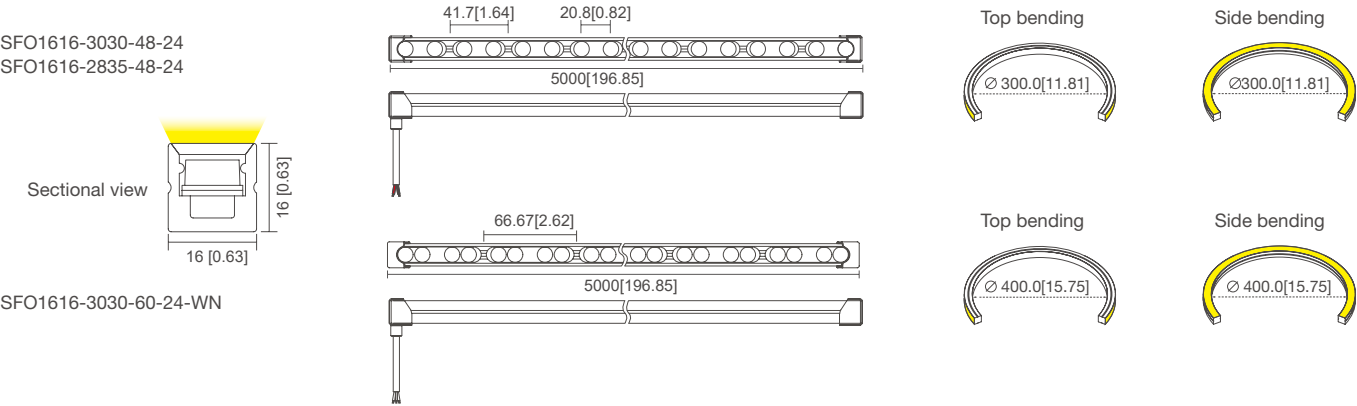

PHOTOMETRIC



Note: above data tested with SFO1616-3030-48-24-W. For other data,please consult sales rep.

SFO2317
FLEXIBLE WALL WASHER



- Adopt professional lens, with good flexibility, suitable for wall washing
- Combined module and silicone tube, with good weatherability
- Great brightness maintenance, long life span
- Top bend and side bend combined into one
- Support PWM, 0~10V, DALI dimming




OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
SFO2317-3030-40-24	DC24V	>80	 2700-6500K	1900	132	14.4	40pcs/m	50mm	5020*25.5*19.5mm
		>90	 2700-6500K	1656	115				
SFO2317-2835-40-24-R	DC24V	\	 Red	504	35	14.4	40pcs/m	50mm	5020*25.5*19.5mm
SFO2317-2835-40-24-G	DC24V	\	 Green	1036	72	14.4	40pcs/m	50mm	5020*25.5*19.5mm
SFO2317-2835-40-24-B	DC24V	\	 Blue	230	16	14.4	40pcs/m	50mm	5020*25.5*19.5mm
SFO2317-5050-40-24-WN	DC24V	>80	 2700K	648	72	9	40pcs/m	50mm	5020*25.5*19.5mm
		>80	 6500K	702	78	9			
		\	 W+N	1350	75	18			


Note: ☐ The data of 2700K-6500K is based on 4000K. ☐ For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

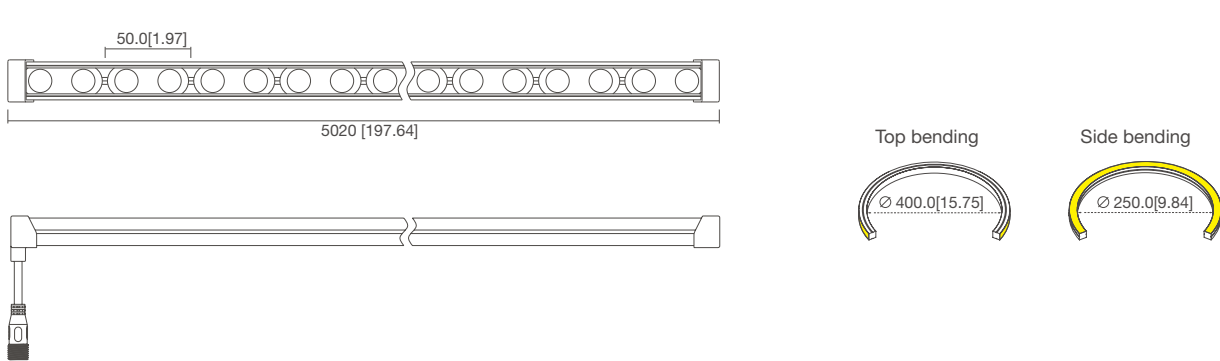

PHOTOMETRIC

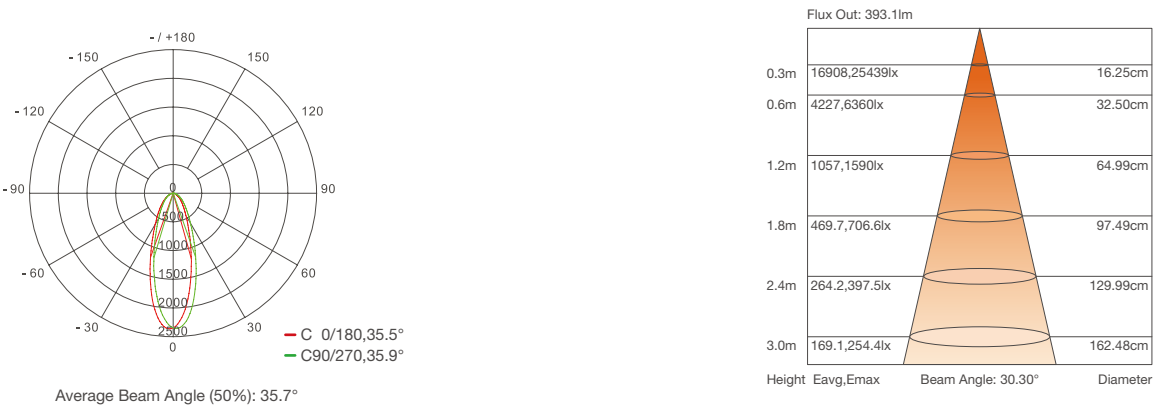

Note: above data tested with SFO3030-40-24-30°. For other data,please consult sales rep.

MFO1611
FLEXIBLE WALL WASHER




- Excellent attenuation performance and long lifespan;
- 3D bending design for easy installation;
- Multiple lens angles available;
- Customizable upon request.
- Supports PWM, 0-10V, and DALI dimming.

OPTICAL & ELECTRICAL PARAMETERS



Model No.	Voltage	Ra	Beam Angle	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
MFO1611-5050-56-24	DC24V	>90	45°	4000K	1170	65	18	56pcs/m	17.9mm	5000*16*11mm
MFO1611-5050-56-24- RGB-SPI	DC24V	\	60°	Red	113	21	5.37	56pcs/m	125mm	5000*16*11mm
				Green	306	57	5.37			
				Blue	64	12	5.37			
				RGB	469	33	14.21			
MFO1611-5050-56-24- RGB-DMX	DC24V	\	60°	Red	98	18	5.47	56pcs/m	125mm	5000*16*11mm
				Green	274	50	5.47			
				Blue	55	10	5.47			
				RGB	421	32	13.15			

PROFILE DRAWINGS

Unit:mm/inch

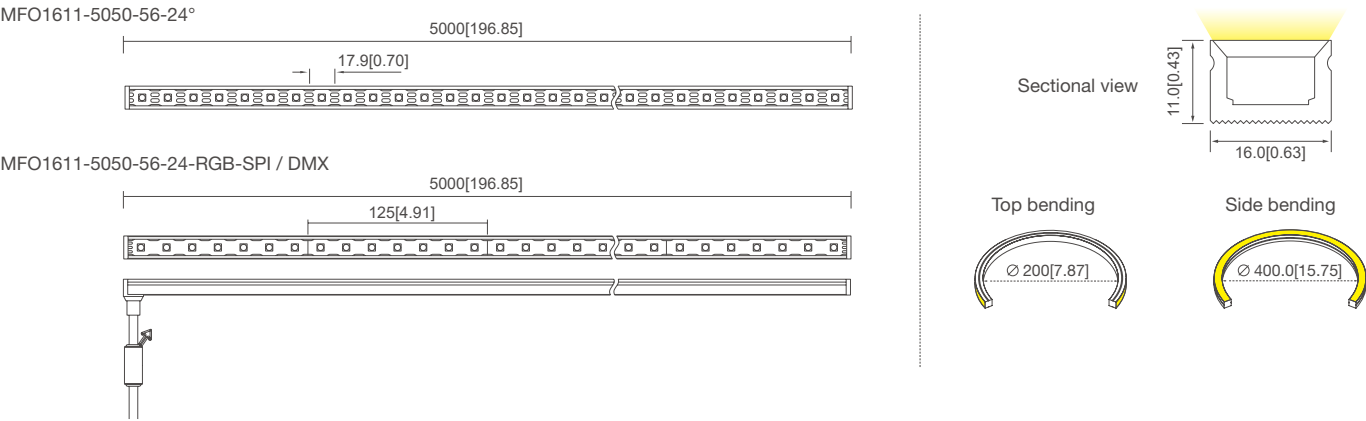

PHOTOMETRIC

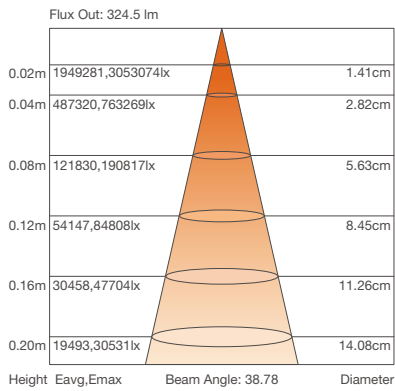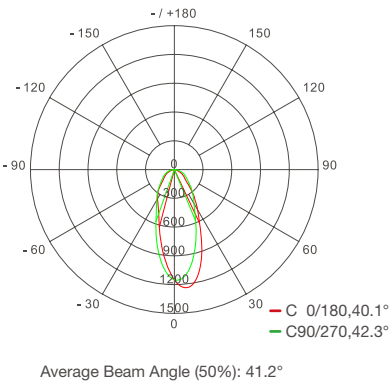

Note: above data tested with MFO1611-5050-56-24-W . For other data,please consult sales rep.

MFO3525
FLEXIBLE WALL WASHER



- Excellent attenuation performance and long lifespan;
- 3D bending design for easy installation;
- Multiple lens angles available;
- Customizable upon request.
- Supports PWM, 0-10V, and DALI dimming.


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
MFO3525-H3535-24-24-W	DC24V	>90	🟡 4000K	2700	125	21.6	24pcs/m	333.3mm	5000*35*25mm
MFO3525-3535-24-24-RGBW DMX	DC24V	>80	🟡 3000K	334	49	7	24pcs/m	250mm	5000*35*25mm
		\	🔴 Red	204	30	7			
		\	🟢 Green	477	70	7			
		\	🔵 Blue	150	22	7			
		\	🌈 RGBW	1125	45	25			



Note: For more information, please contact our sales representative.

PROFILE DRAWINGS

Unit:mm/inch

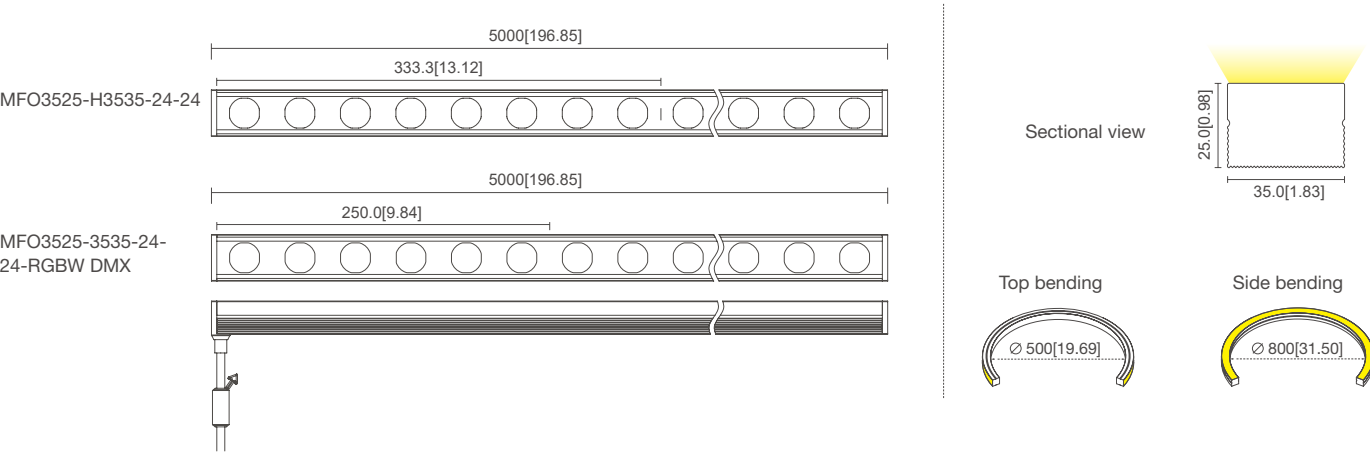

PHOTOMETRIC

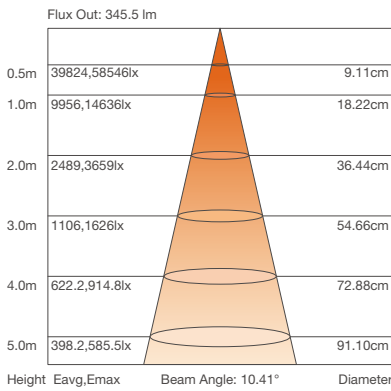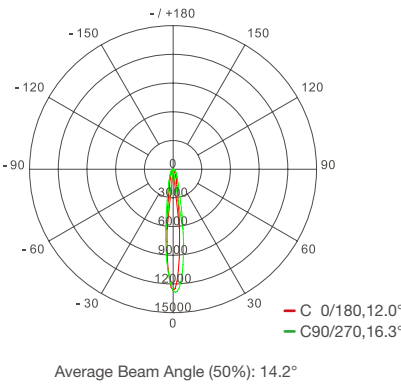

Note: above data tested with MFO3525-H3535-24-24-4000K-12° . For other data,please consult sales rep.

SAUNA ROOM SERIES

Designed for sauna environments, resistant to high temperature and humidity, providing safe, stable, and comfortable illumination.

Working Temperature: **+80~+110°C**

Humidity: **99%**



NSF1617-SN-Single color

SAUNA ROOM



- Color options: Single color.
- Low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in hightemperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY

Model No.	Working Temperature	Storage Temperature	Humidity
NSF1617-SN-Single color	+80~+110°C	-20~+70°C	99%


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1617-SN-Single color	DC24V	>90	● 2700K	497	69	7.2	140pcs/m	50mm	10000*16*17mm
			● 3000K	504	70				
			● 4000K	533	74				
			● 5000K	518	72				
			○ 6500K	533	74				


PROFILE DRAWINGS

Unit:mm/inch

Molding pressed (IP68)

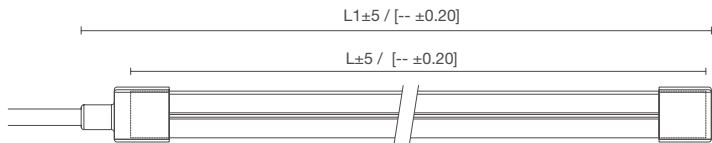



Sectional view



Bending Diameter




PHOTOMETRIC

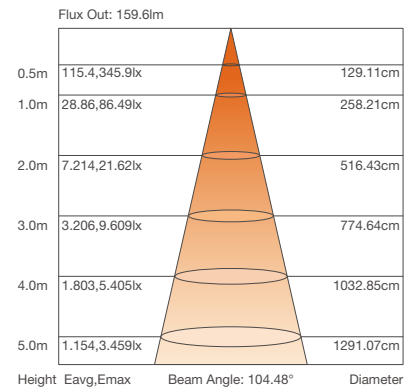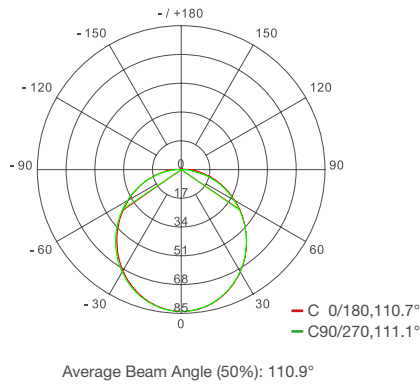

NSF1617-SN-Multiple colors

SAUNA ROOM

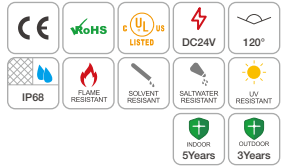

- Color options: WN, RGB, RGBW.
- Low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in hightemperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY

Model No.	Working Temperature	Storage Temperature	Humidity
NSF1617-SN-Multiple colors	+80~+110°C	-20~+70°C	99%


OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1617-SN-WN	DC24V	>90	● 2700K	241	67	3.6	224pcs/m	333.3mm	5000*16*17mm
		>90	● 5500K	252	70	3.6			
		\	● W+N	490	68	7.2			
NSF1617-SN-RGB	DC24V	\	● Red	45	17	2.67	120pcs/m	50.0mm	5000*16*17mm
			● Green	149	56	2.67			
			● Blue	32	12	2.67			
			● RGB	224	28	8.0			


PROFILE DRAWINGS

Unit:mm/inch

Molding pressed (IP68)

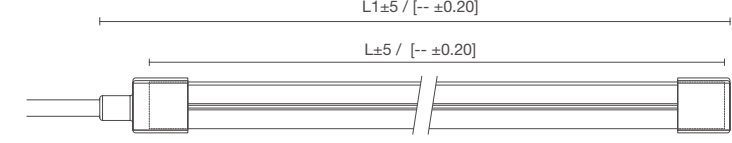



Sectional view



Bending Diameter



PHOTOMETRIC

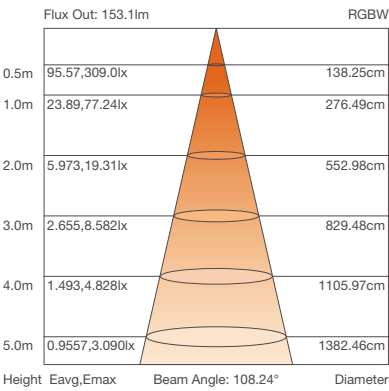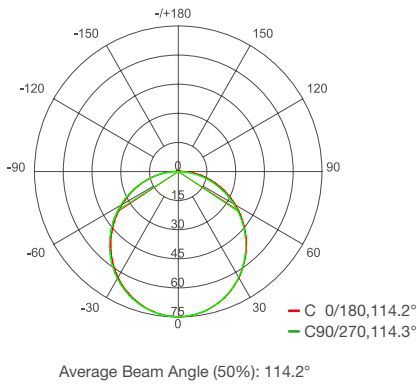

Note: above data tested with NSF1617-SN-RGBW. For other data,please consult sales rep.

NSF1617-SN-DMX

SAUNA ROOM



- DMX control, low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in hightemperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY


Model No.	Working Temperature	Storage Temperature	Humidity
NSF1617-SN-DMX-RGB	+80~+110°C	-20~+70°C	99%

OPTICAL & ELECTRICAL PARAMETERS

Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NSF1617-SN-DMX-RGB	DC24V	\	Red	32	7	4.67	60pcs/m	100mm	5000*16*17mm
			Green	94	22	4.67			
			Blue	21	5	4.67			
			RGB	135	17	8.00			

PROFILE DRAWINGS

Unit:mm/inch

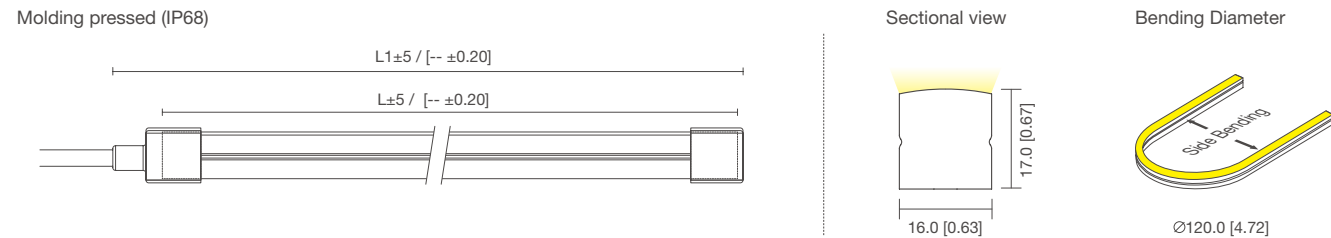

PHOTOMETRIC



Note: above data tested with NSF1617-SN-RGBW. For other data,please consult sales rep.

NDF1617-SN-Single color

SAUNA ROOM



- Color options: Single color.
- Low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in hightemperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY


Model No.	Working Temperature	Storage Temperature	Humidity
NDF1617-SN-Single color	+80~+110°C	-20~+70°C	99%

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617-SN-Single color	DC24V	>90	2700K	540	75	7.2	140pcs/m	50mm	10000*16*17mm
			3000K	540	75				
			4000K	583	81				
			5000K	554	77				
			6500K	561	78				

PROFILE DRAWINGS

Unit:mm/inch

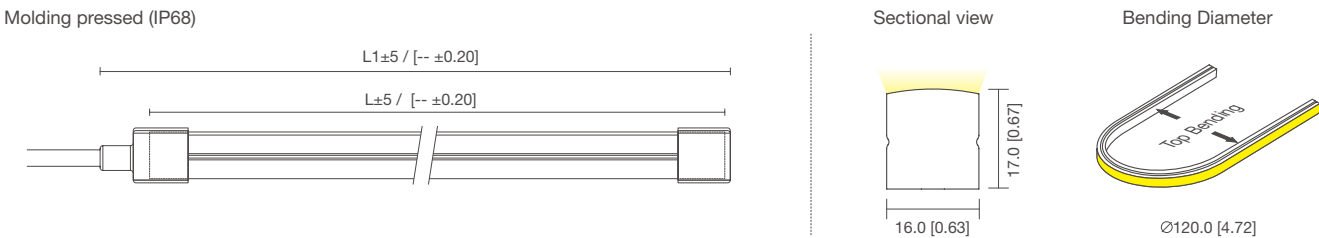

PHOTOMETRIC

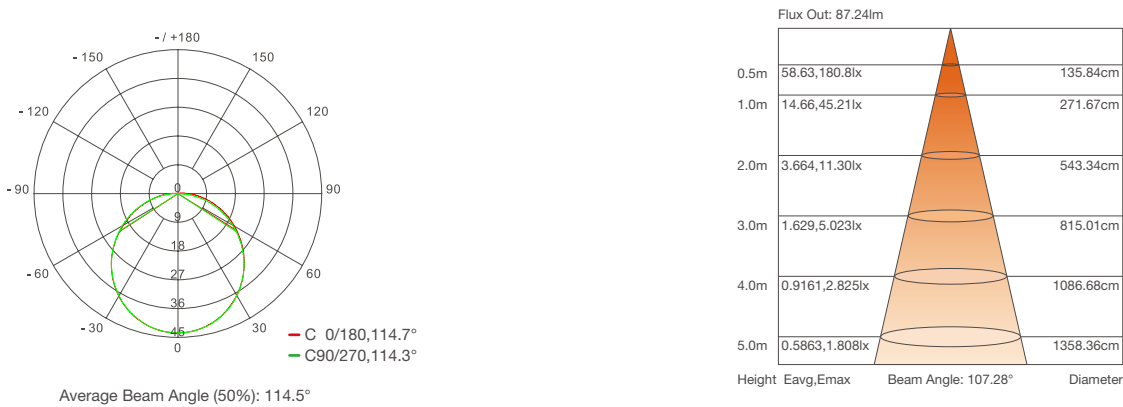

Note: above data tested with NSF1617-SN-RGBW. For other data,please consult sales rep.

NDF1617-SN-Multiple colors
SAUNA ROOM



- Color options: WN, RGB, RGBW.
- Low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in hightemperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY


Model No.	Working Temperature	Storage Temperature	Humidity
NDF1617-SN-Multiple colors	+80~+110°C	-20~+70°C	99%

OPTICAL & ELECTRICAL PARAMETERS



Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617-SN-WN	DC24V	>90	2700K	259	72	3.6	224pcs/m	62.5mm	5000*16*17mm
		>90	5500K	270	75	3.6			
		\	W+N	525	73	7.2			
NDF1617-SN-RGB	DC24V	\	Red	43	16	2.67	72pcs/m	83.3mm	5000*16*17mm
			Green	121	45	2.67			
			Blue	27	10	2.67			
			RGB	184	23	8.0			

PROFILE DRAWINGS

Unit:mm/inch

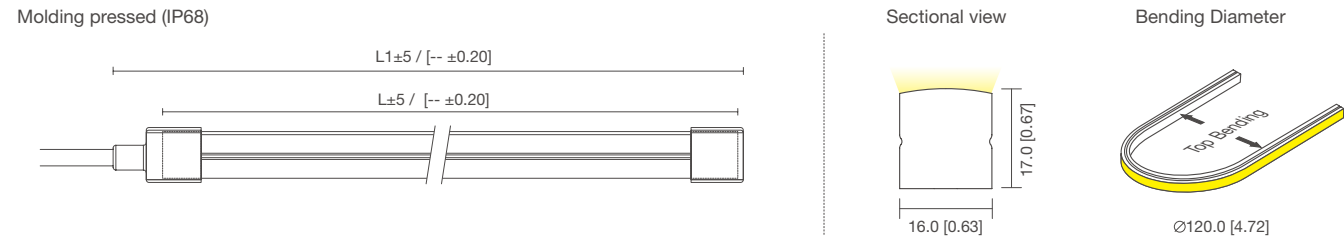

PHOTOMETRIC

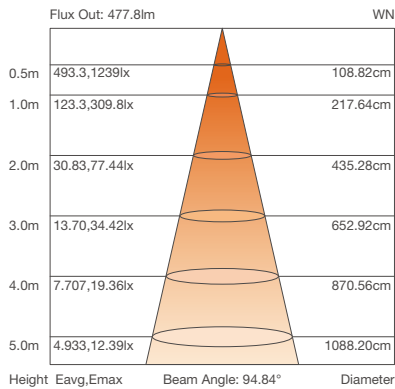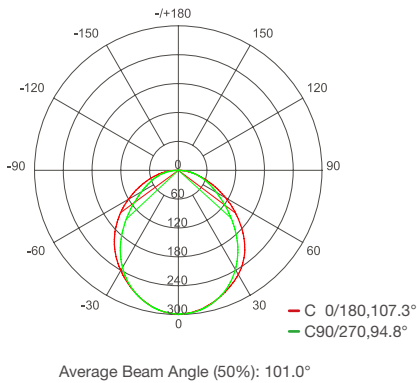

Note: above data tested with NDF1617-SN-WN. For other data,please consult sales rep.

NDF1617-SN-DMX
SAUNA ROOM



- DMX control, low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in hightemperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY


Model No.	Working Temperature	Storage Temperature	Humidity
NDF1617-SN-DMX-RGB	+80~+110°C	-20~+70°C	99%

OPTICAL & ELECTRICAL PARAMETERS



Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
NDF1617-SN-DMX-RGB	DC24V	\	Red	33	8	4.67	60pcs/m	100mm	5000*16*17mm
			Green	103	24	4.67			
			Blue	23	5	4.67			
			RGB	150	19	8.00			

PROFILE DRAWINGS

Unit:mm/inch

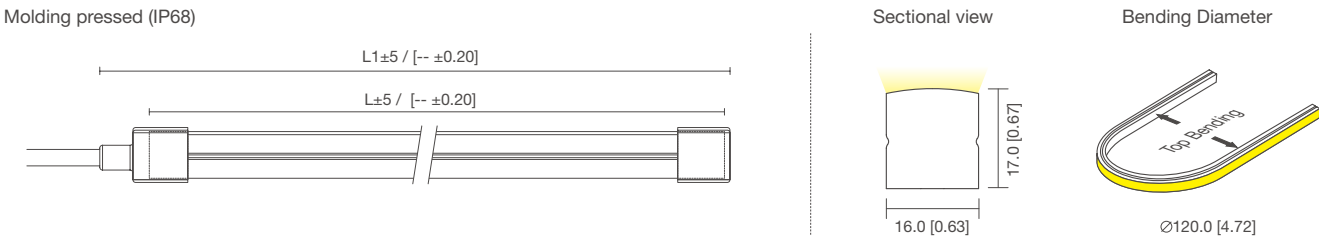

PHOTOMETRIC

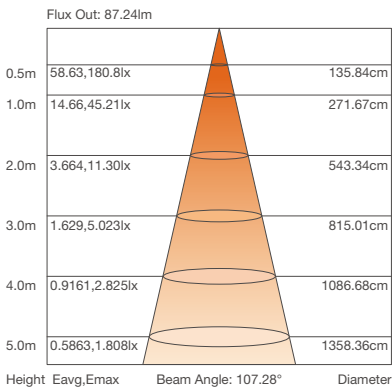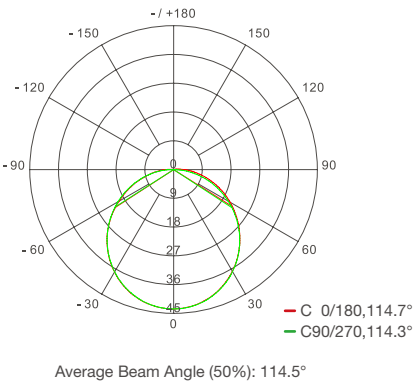

WHE1608-SN-Single color

SAUNA ROOM



- Low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in hightemperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY


Model No.	Working Temperature	Storage Temperature	Humidity
WHE1608-SN-Single color	+80~+110°C	-20~+70°C	99%

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
WHE1608-SN-Single color	DC24V	>90	● 2700K	720	100	7.2	140pcs/m	50mm	10000*16*8mm
			● 3000K	734	102				
			● 4000K	770	107				
			● 5000K	763	106				
			○ 6500K	756	105				

PROFILE DRAWINGS

Unit:mm/inch

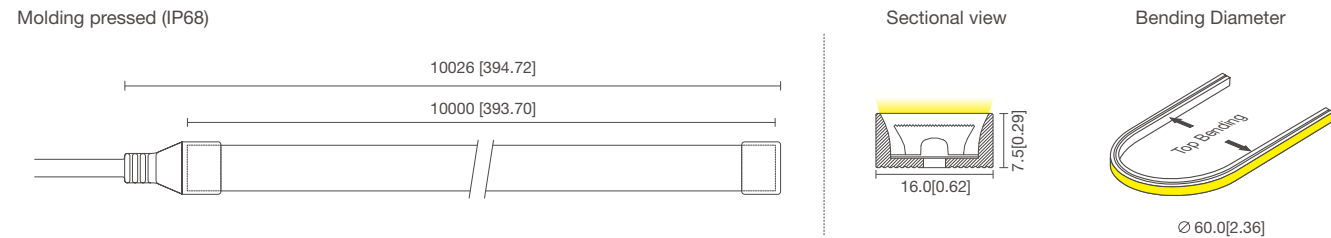

PHOTOMETRIC

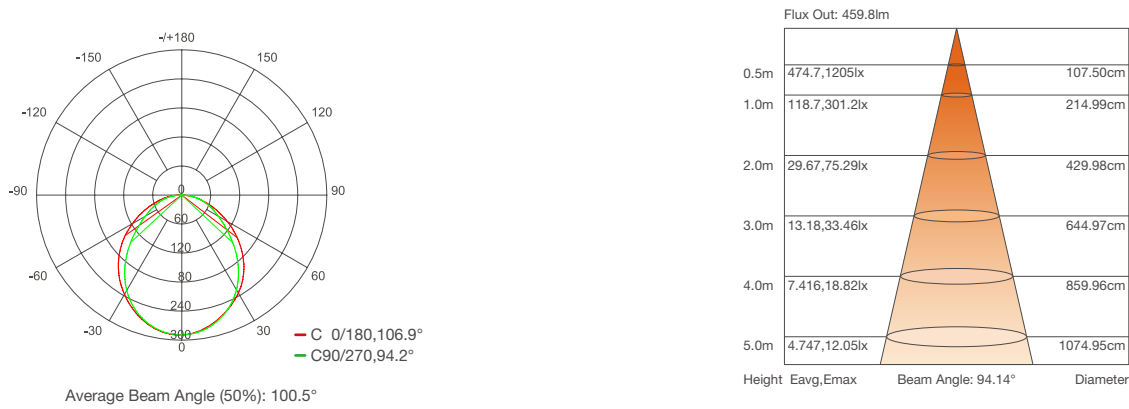

Note: above data tested with WHE1608-SN-2700K. For other data,please consult sales rep.

WHE1608-SN-SPI

SAUNA ROOM



- SPI control, low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in hightemperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY


Model No.	Working Temperature	Storage Temperature	Humidity
WHE1608-SN-SPI-RGB	+80~+110°C	-20~+70°C	99%

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cutttable Length	Product Size L*W*H
WHE1608-SN-SPI-RGB	DC24V	\	● Red	60	15	4	720pcs/m	100mm	5000*16*8mm
			● Green	244	61	4			
			● Blue	36	9	4			
			● RGB	300	30	10			

PROFILE DRAWINGS

Unit:mm/inch

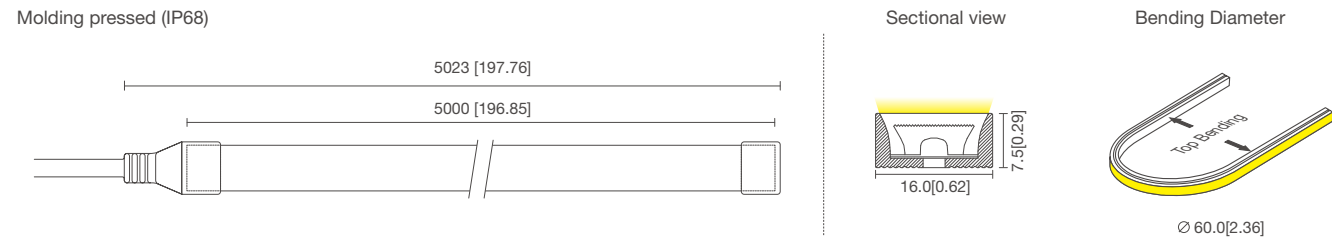

PHOTOMETRIC

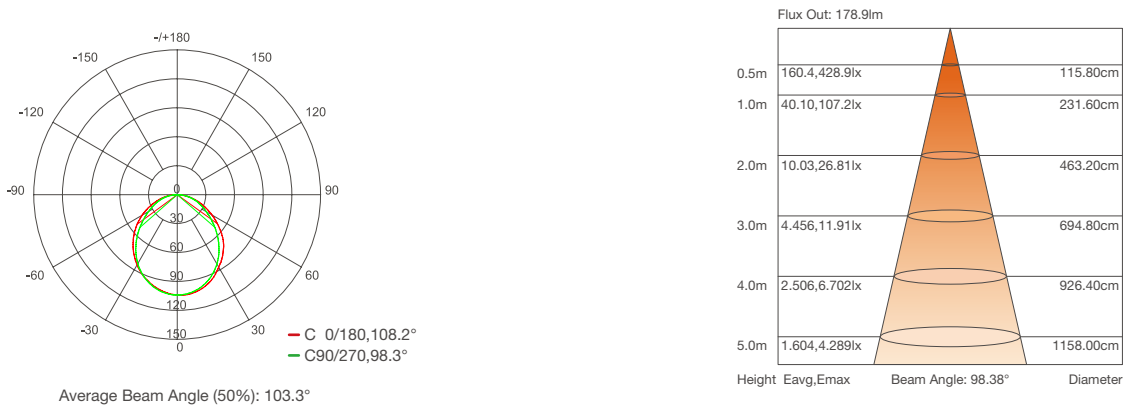

Note: above data tested with WHE1608-SN-SPI at RGB. For other data,please consult sales rep.

WHE1608-SN-DMX

SAUNA ROOM



- DMX control, low drive current, low heat rise, and long lifespan.
- The new waterproof structure ensures long-term stability and effectiveness in high-temperature environments.
- High-temperature resistant design to prevent heat damage.
- Suitable for saunas, showers, and similar environments.
- Multiple specifications, support customization.
- The product must be used at least 1 meter away from heat or steam sources.

TEMP & HUMIDITY


Model No.	Working Temperature	Storage Temperature	Humidity
WHE1608-SN-DMX-RGB	+80~+110°C	-20~+70°C	99%

OPTICAL & ELECTRICAL PARAMETERS


Model No.	Voltage	Ra	Color	Lm/m	Lm/W	W/m	LED QTY	Cuttable Length	Product Size L*W*H
WHE1608-SN-DMX-RGB	DC24V	\	Red	47	11	4.27	60pcs/m	100mm	5000*16*8mm
			Green	158	37	4.27			
			Blue	34	8	4.27			
			RGB	224	28	8.00			

PROFILE DRAWINGS


Unit:mm/inch

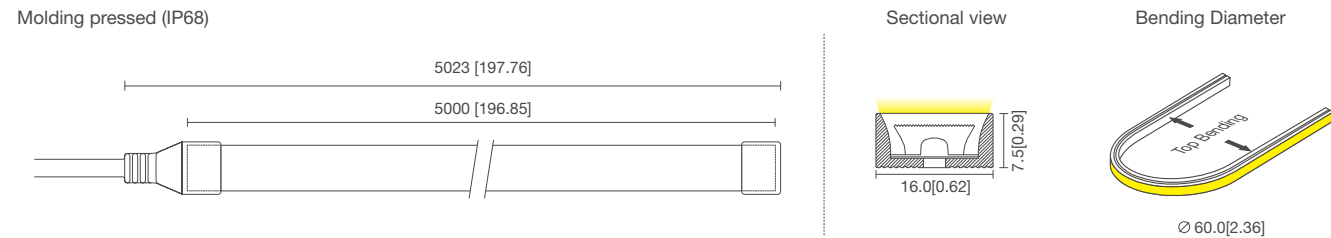

PHOTOMETRIC

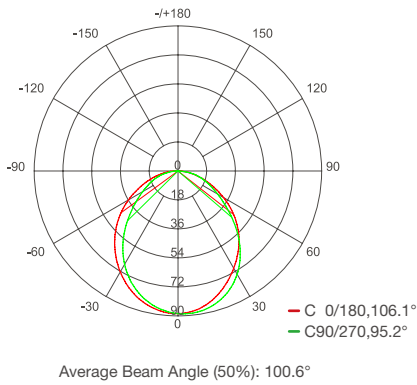

Note: above data tested with WHE1608-SN-DMX at RGB. For other data,please consult sales rep.

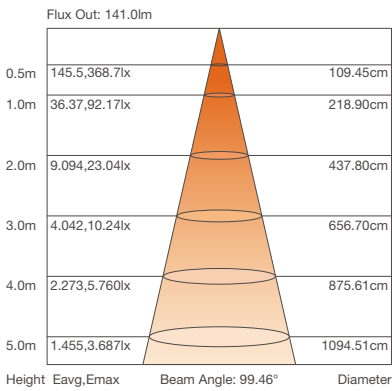

CRNEON SERIES



FEATURES

- Attractive design, multiple colors optional
- Extrusion modeling with excellent weather resistance
- Multiple size optional, cuttable and customizable


APPLICATION

- Applied for advertising neon channel letters etc.



PROFILE DRAWINGS

Unit: mm[inch]

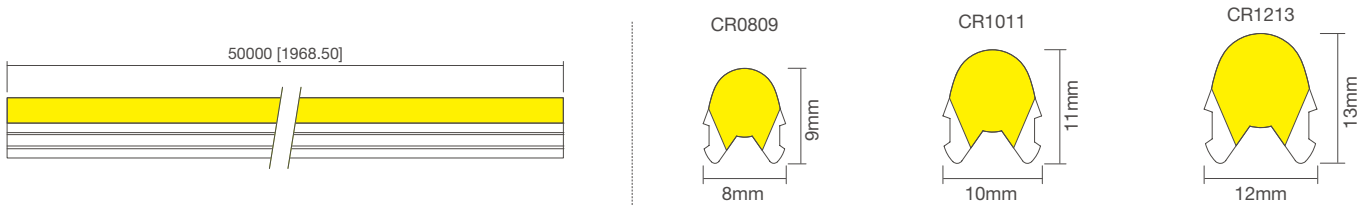

ACCESSORIES



PRODUCT PARAMETERS

Model No.	Voltage (DC)	LED Strip+Cover	Color	CCT/Wavelength	Lm/m	Lm/W	Measured Power
CR0809	12V	WW	W	6107K	291	78	7.2W/m (±10%)
		WR	R	620-625nm	18	5	
		WG	G	520-525nm	19	5	
		WB	B	465-470nm	20	5	
		WY	Y	587-589.5nm	62	17	
		WO	O	600-605nm	75	20	
		BW	B	465-470nm	55	14	
		GW	G	520-525nm	180	44	
		RW	R	620-625nm	69	20	
		OW	O	600-605nm	78	23	
		YW	Y	587-589.5nm	43	13	
		BB	B	465-470nm	8	2	
		GG	G	520-525nm	28	7	
		RR	R	620-625nm	28	8	
		OO	O	600-605nm	38	11	
		YY	Y	587-589.5nm	14	4	

Model No.	Voltage (DC)	LED Strip+Cover	Color	CCT/Wavelength	Lm/m	Lm/W	Measured Power
CR1011	12V	WW	W	6107K	248	66	7.2W/m (±10%)
		WR	R	620-625nm	9	2	
		WG	G	520-525nm	48	13	
		WB	B	465-470nm	16	4	
		WY	Y	587-589.5nm	2	1	
		WO	O	600-605nm	56	15	
		BW	B	465-470nm	61	18	
		GW	G	520-525nm	37	11	
		RW	R	620-625nm	155	38	
		OW	O	600-605nm	49	13	
		YW	Y	587-589.5nm	58	17	
		BB	B	465-470nm	20	6	
		GG	G	520-525nm	10	3	
		RR	R	620-625nm	22	5	
		OO	O	600-605nm	4	1	
		YY	Y	587-589.5nm	27	8	

Model No.	Voltage (DC)	LED Strip+Cover	Color	CCT/Wavelength	Lm/m	Lm/W	Measured Power
CR1213	12V	WW	W	6107K	270	72	7.2W/m (±10%)
		WR	R	620-625nm	7	2	
		WG	G	520-525nm	43	11	
		WB	B	465-470nm	11	3	
		WY	Y	587-589.5nm	3	1	
		WO	O	600-605nm	49	13	
		BW	B	465-470nm	68	20	
		GW	G	520-525nm	35	10	
		RW	R	620-625nm	160	13	
		OW	O	600-605nm	50	13	
		YW	Y	587-589.5nm	66	19	
		BB	B	465-470nm	18	5	
		GG	G	520-525nm	9	3	
		RR	R	620-625nm	20	5	
		OO	O	600-605nm	3	1	
		YY	Y	587-589.5nm	28	8	

LED NEON
INSTALLATION
ACCESSORIES



TOP BENDING

NDF1617

Free

	ASY-1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm Quantity(5/10m): 2-4pcs		ASY-1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm Quantity(5/10m): 2-4pcs
--	---	---	---

Optional

	ASY-1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm		ASY-1617-A3NN0035-MT Item: Aluminum track Size(L*W*H): 35*18.7*19.37mm		ASY-1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.4*16.7mm
	ASY-1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm		ASY-1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm		ASY-1617-A2NN1000-MT Item: Aluminum Channel(with metal spring) Size(L*W*H): 1000*21.2*19mm
	ASY-1617-A6NN0035-MT Item: Aluminum Channel Size(L*W*H): 35*20*21mm		ASY-1617-A6NN1000-MT Item: Aluminum Channel 1000mm (with silicone strip) Size(L*W*H): 1000*20*21mm		ASY-1617-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 35*20*30mm
	ASY-1617-A7NN1000-MT Item:Aluminum Channel 1000mm (with silicone strip)(with wings) Size(L*W*H): 1000*20*30mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm

Indoor Use Only

	ASY-1617-F00NNH-EC Item: Free welding end cap (straight outlet) Size(L*W*H): 49*22*23mm		ASY-1617-F00NNX-EC Item: Free welding end cap Size(L*W*H): 45*22*23mm		ASY-1617-F00NNR-EC Item: Free welding end cap (left outlet) Size(L*W*H): 53*25*23mm
	ASY-1617-F00NNL-EC Item: Free welding end cap (right outlet) Size(L*W*H): 53*25*23mm		ASY-1617-F00NNB-EC Item: Free welding end cap (bottom outlet) Size(L*W*H): 53*22*26mm		ASY-NDF1617-F00NNM-EC Item: Splicing connector 1 (IP65) Size(L*W*H): 88*22*23mm
	ASY-1617-F01NNM-EC Item: Splicing connector 2 Size(L*W*H): 57*23*20mm				

NDF1617L / NDF1617H / NDF1617black

Free

	ASY-1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm Quantity(5/10m): 2-4pcs		ASY-1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm Quantity(5/10m): 2-4pcs
--	---	---	---

Optional

	ASY-1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm		ASY-1617-A3NN0035-MT Item: Aluminum track Size(L*W*H): 35*18.7*19.37mm		ASY-1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.4*16.7mm
	ASY-1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm		ASY-1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm		ASY-1617-A2NN1000-MT Item: Aluminum Channel(with metal spring) Size(L*W*H): 1000*21.2*19mm
	ASY-1617-A6NN0035-MT Item: Aluminum Channel Size(L*W*H): 35*20*21mm		ASY-1617-A6NN1000-MT Item: Aluminum Channel 1000mm (with silicone strip) Size(L*W*H): 1000*20*21mm		ASY-1617-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 35*20*30mm

	ASY-1617-A7NN1000-MT Item:Aluminum Channel 1000mm (with silicone strip)(with wings) Size(L*W*H): 1000*20*30mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm
--	--	--	--	--	---

NDF1717SS

Free

	ASY-1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm Quantity(5/10m): 2-4pcs		ASY-1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm Quantity(5/10m): 2-4pcs
---	---	---	---

Optional

	ASY-1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm
---	--	---	--	---	---

NDF1212

Free

	ASY-NDF1212-N00NNH-EC Item: Front cap Size(L*W*H): 27.5*14.9*14.4mm Quantity (5/10/15m): 3/6/9pcs		ASY-NDF1212-N00NNX-EC Item: Closing End-cap Size(L*W*H): 14*14.9*14.4mm Quantity (5/10/15m): 3/6/9pcs
---	--	---	--

Optional

	ASY-NDF1212-N00NNL-EC Item: Front cap(Left outlet) Size(L*W*H): 27.5*20.9*14.4mm Quantity (5/10/15m): 3/6/9pcs		ASY-NDF1212-N00NNR-EC Item: Front cap (Right outlet) Size(L*W*H): 27*20.4*14.4mm Quantity (5/10/15m): 3/6/9pcs		ASY-NDF1212-N00NNB-EC Item: Front cap (Bottom outlet) Size(L*W*H): 27*20.4*14.9mm Quantity (5/10/15m): 3/6/9pcs
	ASY-NDF1212-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*14.8*15mm Quantity (5/10/15m): 5/10/15pcs		ASY-NDF1212-MNN0500-MT Item: S-type Track Size(L*W*H): 1000*13.1*9.1mm Quantity (5/10/15m): 3/6/9pcs		ASY-NDF1212-A3NN0025-MT Item: Aluminum Channel Size(L*W*H): 35*14.8*15mm Quantity (5/10/15m): 15/30/45pcs
	ASY-NDF1212-F00NNX-EC Item: Free welding end cap (IP54) Size: 41.21*16.9*15.85mm		ASY-NDF1212-F00NNL-EC Item: Free welding connector (IP54) Size: 48.5*36.0*15.95mm		PA3 Item: Screws Size: PA3*10mm
	WR-7516 Item: Silicone Glue Size: 45g/pc				

NDF1010

Free

	ASY-1010-N00NNH-EC Item: Front cap Size(L*W*H): 28*12.4*12.9mm Quantity (5m): 1pcs		ASY-1010-N00NNX-EC Item: Closing End-cap Size(L*W*H): 20*12.4*12.9mm Quantity (5m): 1pcs
---	---	---	---

Optional

	ASY-1010-N00NS-EC Item: Front cap (side outlet) Size(L*W*H): 24*18.4*12.9mm		ASY-1010-N02NNX-EC Item: Closing End-cap Size(L*W*H): 12*12.3*12.8mm		ASY-1010-A4NN0025-MT Item: Aluminum clip Size(L*W*H): 25*12*12.5mm
	ASY-1010-A2NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*11.7*9.5mm		ASY-NDF1010-F02NNM Item: Mid-connector Size(L*W*H): 40*11.5*11mm		ASY-NDF1010-F01NNH Item: Power Input Connector Size(L*W*H): 25*11.5*11mm



WR-7516
Item: Silicone Glue
Size: 45g/pc



PA3
Item: Screws
Size: PA3*10mm

NDF1005

Free



ASY-NDF1005-N00NNH-EC
Item: Front cap
Size(L*W*H): 25.0*12.7*7.6mm
Quantity (5m): 4pcs



ASY-NDF1005-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 11*12.7*6.6mm
Quantity (5m): 4pcs

Optional



ASY-NDF1005-P1NN0020-MT
Item: PC installation clip
Size(L*W*H): 25*12*9mm
Quantity (5m): 15pcs



ASY-NDF1005-A3NN0020-MT
Item: Aluminum clip
Size(L*W*H): 20*12.4*7mm
Quantity (5m): 15pcs



ASY-NDF1005-P3NN1000-MT
Item: PC channel
Size(L*W*H): 1000*12*9mm
Quantity (5m): 5pcs



ASY-NDF1005-F00NNH-EC
Item: Front connector set
Size(L*W*H): 32.8*15.6*10.4mm
Quantity (5m): 1pcs



PA3
Item: Screws
Quantity (5m): 30pcs
Size: PA3*10mm



WR-7516
Item: Silicone Glue
Quantity (5m): 1pcs
Size: 45g/pc

NDF1306-COB

Free



Item: Front cap
Size(L*W*H): 29*14.7*7.3mm
Quantity (5m): 2-4pcs



Item: Closing End-cap
Size(L*W*H): 12*14.7*6.8mm
Quantity (5m): 2-4pcs

Optional



Item: Plastic clip
Size(L*W*H): 20*15*6.5mm



PA3
Item: Screws
Size: PA3*10mm



WR-7516
Item: Silicone Glue
Size: 45g/pc

NDR2018

Free



ASY-NDR2018-N00NNH-EC
Item: Front cap
Size(L*W*H): 50*23.2*21.2mm
Quantity (10m): 2-4pcs



ASY-NDR2018-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 22.5*23.2*21.2mm
Quantity (10m): 2-4pcs

Optional



ASY-NDR2018-N00NNL-EC
Item: Front cap (Left outlet)
Size(L*W*H): 42*46*21mm



ASY-NDR2018-N00NNR-EC
Item: Front cap (Right outlet)
Size(L*W*H): 42*46*21mm



ASY-NDR2018-P1NN0020-MT
Item: Clip
Size(L*W*H): 20*25*10mm



ASY-NDR2018-P3NN1000-MT
Item: Plastic Channel
Size(L*W*H): 1220*25.5*10mm



ASY-NDR2018-A2NN1000-MT
Item: Front connector set
Size(L*W*H): 1000*24.47*10mm



ASY-NDR2018-A4NN0035-MT
Item: Aluminum track
Size(L*W*H): 25*24.1*10.8mm



WR-7516
Item: Silicone Glue
Size: 45g/pc



PA3
Item: Screws
Size: PA3*10mm

NDR1414

Free



ASY-NDR1414-N00NNH-EC
Item: Front cap
Size(L*W*H): 31*16*15mm
Quantity (15m): 2-4pcs



ASY-NDR1414-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 10*17*16mm
Quantity (15m): 2-4pcs

Optional



ASY-NDR1414-P1NN0016-MT
Item: Plastic Clip



ASY-NDR1414-RNN0012-MT
Item: PC channel



ASY-NDR1414-A4NN0025-MT
Item: Front connector set
Size(L*W*H): 25*18*10mm



PA3
Item: Screws
Size: PA3*10mm



WR-7516
Item: Silicone Glue
Size: 45g/pc

NDR0604-COB

Free



ASY-NDR0604-COB PLUS-N00NH-EC
Item: Front cap
Size(L*W*H): 20.0*8.0*12.0mm
Quantity (5m): 2pcs



ASY-NDR0604-COB-PLUS-N00NX-EC
Item: Closing End-cap
Size(L*W*H): 11.5*8.0*12.0mm
Quantity (5m): 2pcs

Optional



ASY-NDR0604-PLUS-A1NN1000-MT
Item: Aluminum Channel
Size(L*W*H): 1000*9.5*3.7mm



PA3
Item: Screws
Size: PA3*10mm



WR-7516
Item: Silicone Glue
Size: 45g/pc

NDR1004-COB

Free



ASY-NDR1004-N00NH-EC
Item: Front cap
Size(L*W*H): 15*12*6.2mm
Quantity (5m): 2pcs



ASY-NDR1004-N00NX-EC
Item: Closing End-cap
Size(L*W*H): 10.5*12.1*6.1mm
Quantity (5m): 2pcs

Optional



ASY-NDR1004-A1NN1000-MT
Item: Aluminum Channel
Size(L*W*H): 1000*13.5*3.7mm



PA3
Item: Screws
Size: PA3*10mm



WR-7516
Item: Silicone Glue
Size: 45g/pc

SIDE BENDING

NSF1617

Free



ASY-1617-N00NNH-EC
Item: Front cap
Size(L*W*H): 30*18*18mm
Quantity(5/10m): 2-4pcs



ASY-1617-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 18*19*18mm
Quantity(5/10m): 2-4pcs

Optional



ASY-1617-N00NNS-EC
Item: Front cap (side outlet)
Size(L*W*H): 25*30*19mm



ASY-1617-A3NN0035-MT
Item: Aluminum track
Size(L*W*H): 35*18.7*19.37mm



ASY-1617-MNN0500-MT
Item: S-type Track
Size(L*W*H): 500*17.4*16.7mm

	ASY-1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm		ASY-1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm		ASY-1617-A2NN1000-MT Item: Aluminum Channel(with metal spring) Size(L*W*H): 1000*21.2*19mm
	ASY-1617-A6NN0035-MT Item: Aluminum Channel Size(L*W*H): 35*20*21mm		ASY-1617-A6NN1000-MT Item: Aluminum Channel 1000mm (with silicone strip) Size(L*W*H): 1000*20*21mm		ASY-1617-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 35*20*30mm
	ASY-1617-A7NN1000-MT Item:Aluminum Channel 1000mm (with silicone strip)(with wings) Size(L*W*H): 1000*20*30mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm

Indoor Use Only

	ASY-1617-F00NNH-EC Item: Free welding end cap (straight outlet) Size(L*W*H): 49*22*23mm		ASY-1617-F00NNX-EC Item: Free welding end cap Size(L*W*H): 45*22*23mm		ASY-1617-F00NNR-EC Item: Free welding end cap (left outlet) Size(L*W*H): 53*25*23mm
	ASY-1617-F00NNL-EC Item: Free welding end cap (right outlet) Size(L*W*H): 53*25*23mm		ASY-1617-F00NNB-EC Item: Free welding end cap (bottom outlet) Size(L*W*H): 53*22*26mm		ASY-NDF1617-F00NNM-EC Item: Splicing connector 1 (IP65) Size(L*W*H): 88*22*23mm
	ASY-1617-F01NNM-EC Item: Splicing connector 2 Size(L*W*H): 57*23*20mm				

NSF1617-black

	ASY-1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm Quantity(5/10m): 2-4pcs		ASY-1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm Quantity(5/10m): 2-4pcs		
	ASY-1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm		ASY-1617-A3NN0035-MT Item: Aluminum track Size(L*W*H): 35*18.7*19.37mm		ASY-1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.4*16.7mm
	ASY-1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm		ASY-1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm		ASY-1617-A2NN1000-MT Item: Aluminum Channel(with metal spring) Size(L*W*H): 1000*21.2*19mm
	ASY-1617-A6NN0035-MT Item: Aluminum Channel Size(L*W*H): 35*20*21mm		ASY-1617-A6NN1000-MT Item: Aluminum Channel 1000mm (with silicone strip) Size(L*W*H): 1000*20*21mm		ASY-1617-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 35*20*30mm
	ASY-1617-A7NN1000-MT Item:Aluminum Channel 1000mm (with silicone strip)(with wings) Size(L*W*H): 1000*20*30mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm

NSF1617-TS

	ASY-1616-P1NN0020-MT Item: Plastic Clip Size(L*W*H): 20*16*13mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm
--	---	---	--	--	---------------------------------------

NSF1212

	ASY-NSF1212-N00NNH-EC Item: Front cap Size(L*W*H): 27.5*14.9*14.4mm Quantity (10m): 6pcs		ASY-NSF1212-N00NNX-EC Item: Closing End-cap Size(L*W*H): 14*14.9*14.4mm Quantity (10m): 10pcs		
	ASY-NSF1212-N00NNL-EC Item: Front cap(Left outlet) Size(L*W*H): 27.5*20.9*14.4mm		ASY-NSF1212-N00NNR-EC Item: Front cap (Right outlet) Size(L*W*H): 27*20.4*14.4mm		ASY-NSF1212-N00NNB-EC Item: Front cap (Bottom outlet) Size(L*W*H): 27*20.4*14.9mm
	ASY-NSF1212-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*14.8*15mm		ASY-NSF1212-MNN1000-MT Item: S-type Track Size(L*W*H): 1000*13.1*9.1mm		ASY-NSF1212-A3NN0025-MT Item: Aluminum Channel Size(L*W*H): 35*14.8*15mm
	WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm		

NSF1220

	Item: Front cap Size(L*W*H): 35*15*23mm		Item: Closing End-cap Size(L*W*H): 16.5*15*23mm		
	Item: Front cap(Left outlet) Size(L*W*H): 30*20*23mm		Item: Front cap (Right outlet) Size(L*W*H): 30*20*23mm		Item: Front cap (Bottom outlet) Size(L*W*H): 20*15*38mm
	Item: Aluminum track Size(L*W*H): 35*24*15mm		Item: Aluminum Channel Size(L*W*H): 1000*24*15mm		WR-7516 Item: Silicone Glue Size: 45g/pc
	PA3 Item: Screws Size: PA3*10mm				

NSF1017

	ASY-NSF1017-N00NNH-EC Item: Front cap Size(L*W*H): 33*12*17mm Quantity (10/15m): 2-4pcs		ASY-NSF1017-N00NNX-EC Item: Closing End-cap Size(L*W*H): 13*12*17mm Quantity (10/15m): 2-4pcs		
	ASY-NSF1017-N00NNL-EC Item: Front cap(Left outlet) Size(L*W*H): 26.1*19.2*18.2mm		ASY-NSF1017-N00NNR-EC Item: Front cap (Right outlet) Size(L*W*H): 26.1*19.2*18.2mm		ASY-NSF1017-N00NNB-EC Item: Front cap (Bottom outlet) Size(L*W*H): 26.1*24.2*12.2mm

	ASY-NSF1017-A3NN0025-MT Item: Aluminum track Size(L*W*H): 25*12.3*17mm		ASY-NSF1017-MNN0500-MT Item: S-type Track Size(L*W*H): 500*11*14.6mm		ASY-NSF1017-P1NN0015-MT Item: Plastic Clip Size(L*W*H): 12*12*12mm
	ASY-NSF1017-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*12.3*17mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm

NSF1010

Free					
	ASY-NSF1010-N00NNH-EC Item: Front cap Size(L*W*H): 28*12.4*12.9mm Quantity (5m): 2pcs		ASY-NSF1010-N00NNX-EC Item: Closing End-cap Size(L*W*H): 20*12.4*12.9mm Quantity (5m): 2pcs		
Optional					
	ASY-NSF1010-N00NS-EC Item: Front cap (side outlet) Size(L*W*H): 24*18.4*12.9mm		ASY-NSF1010-A4NN0025-MT Item: Aluminum clip Size(L*W*H): 25*12*12.5mm		ASY-NSF1010-A2NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*11.7*9.5mm
	WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm		

NSF1010

Free



ASY-NSF1010-N00NNH-EC
Item: Front cap
Size(L*W*H): 28*12.4*12.9mm
Quantity (5m): 2pcs



ASY-NSF1010-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 20*12.4*12.9mm
Quantity (5m): 2pcs

Optional



ASY-NSF1010-N00NS-EC

Item: Front cap (side outlet)
Size(L*W*H): 24*18.4*12.9mm



ASY-NSF1010-A4NN0025-MT

Item: Aluminum clip
Size(L*W*H): 25*12*12.5mm



ASY-NSF1010-A2NN1000-MT

Item: Aluminum Channel
Size(L*W*H): 1000*11.7*9.5mm



WR-7516

Item: Silicone Glue
Size: 45g/pc



PA3

Item: Screws
Size: PA3*10mm

NSF0612

Free



ASY-NSF0612-N00NNH-EC

Item: Front cap

Size(L*W*H): 28*14*9.23mm

Quantity (5m): 3pcs



ASY-NSF0612-N00NNX-EC

Item: Closing End-cap

Size(L*W*H): 13*14*8mm

Quantity (5m): 3pcs

Optional



ASY-NSF0612-N00NNS-EC

Item: Front cap (Side outlet)

Size(L*W*H): 23*20*14mm



ASY-NSF0612-N00NNB-EC

Item: Front cap (bottom outlet)

Size(L*W*H): 2.5*4*10mm



ASY-NSF0612-A3NN0035-MT

Item: Aluminum track

Size(L*W*H): 35*7.8*13.5mm

	ASY-NSF0612-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*7.80*13.5m		ASY-NSF0612-P1NN0014-MT Item: Plastic Clip Size(L*W*H): 12*10*12mm		WR-7516 Item: Silicone Glue Size: 45g/pc
	PA3 Item: Screws Size: PA3*10mm				

NSF0410

Free					
	ASY-NSF0410-N00NNH-EC Item: Front cap Size(L*W*H): 10*4.5*12mm Quantity (5m): 2pcs		ASY-NSF0410-N00NNX-EC Item: Closing End-cap Size(L*W*H): 10*4.5*12mm Quantity (5m): 2pcs		
Optional					
	ASY-NSF1010-N00NS-EC Item: Front cap (side outlet) Size(L*W*H): 24*18.4*12.9mm		Item: Aluminum clip		ASY-NSF0410-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*8.6*12.5mm
	WR-7516 Item: Silicone Glue Size: 45g/pc				

NSF0309

Optional					
	ASY-0804-N00NNH-EC Item: Front cap Size(L*W*H): 18*10.4*6mm		ASY-0804-N00NNX-EC Item: Closing End-cap Size(L*W*H): 10.4*10*6mm		WR-7516 Item: Silicone Glue Size: 45g/pc

NSR1025

Free



ASY-NSR1025-N00NNH-EC
Item: Front cap
Size(L*W*H): 45*26*12mm
Quantity (5/10m): 2-4pcs



ASY-NSR1025-N00NNX-EC
Item: Closing End-cap
Size(L*W*H): 27*16*14mm
Quantity (5/10m): 2-4pcs

Optional



ASY-NSR1025-N00NNL-EC

Item: Front cap (Left outlet)
Size(L*W*H): 18*25*27mm



ASY-NSR1025-N00NNR-EC

Item: Front cap (Right outlet)
Size(L*W*H): 18*25*27mm



ASY-NSR1025-N00NNB-EC

Item: Front cap (Bottom outlet)
Size(L*W*H): 18*14*39mm



ASY-NSR1025-A4NN0035-MT

Item: Aluminum track
Size(L*W*H): 35*15*21mm



ASY-NSR1025-A2NN1000-MT

Item: Aluminum Channel
Size(L*W*H): 1000*12.3*17mm



ASY-NSR1025-MNN0500-EC

Item: S-type Track
Size(L*W*H): 500*11*17mm



WR-7516

Item: Silicone Glue
Size: 45g/pc



PA3

Item: Screws
Size: PA3*10mm

NSR0817

Free

	ASY-NSR0817-N00NNH-EC Item: Front cap Size(L*W*H): 30*12*19mm		ASY-NSR0817-N00NNX-EC Item: Closing End-cap Size(L*W*H): 12*12.5*18mm
--	---	---	---

Optional

	ASY-NSR0817-N00NNL-EC Item: Front cap(Left outlet) Size(L*W*H): 16.5*25*19mm		ASY-NSR0817-N00NNR-EC Item: Front cap (Right outlet) Size(L*W*H): 16.5*25*19mm		ASY-NSR0817-N00NNB-EC Item: Front cap (bottom outlet) Size(L*W*H): 16.5*12*33mm
	ASY-NSR0817-A1NN0025-MT Item: Aluminum Channel 25mm Size(L*W*H): 25*10.6*15.5mm		ASY-NSR0817-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*10.6*15.5mm		WR-7516 Item: Silicone Glue Size: 45g/pc
	PA3 Item: Screws Size: PA3*10mm				

NSR0615

Free

	ASY-NSR0615-N00NNH-EC Item: Front cap Size(L*W*H): 30*9.57*16.4mm Quantity (5m): 3pcs		ASY-NSR0615-N00NNX-EC Item: Closing End-cap Size(L*W*H): 14*10*16mm Quantity (5m): 3pcs
---	--	--	--

Optional

	ASY-NSR0615-N00NNL-EC Item: Front cap(Left outlet) Size(L*W*H): 19*28*17mm		ASY-NSR0615-N00NNR-EC Item: Front cap (Right outlet) Size(L*W*H): 19*9.5*28mm		ASY-NSR0615-N00NNB-EC Item: Front cap (Bottom outlet) Size(L*W*H): 26*18*19mm
	ASY-NSR0615-P1NN0015-MT Item: Plastic Clip Size(L*W*H): 12*9*10mm Quantity (5m): 10pcs		ASY-NSR0615-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*7.8*13.5mm		ASY-NSR0615-A3NN0035-MT Item: Aluminum track Size(L*W*H): 35*7.8*13.5mm
	WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm		

NSF0512

Free

	ASY-NSR0512-N00NNH-EC Item: Front cap Size(L*W*H): 11*14*8mm Quantity (5m): 3pcs		ASY-NSR0512-N00NNX-EC Item: Closing End-cap Size(L*W*H): 11*14*8mm Quantity (5m): 3pcs
--	---	---	---

Optional

	ASY-NSR0512-P1NN0015-MT Model No.: Plastic Clip Size(L*W*H): 12*9*10mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm
--	--	---	--	--	---------------------------------------

N2-4

Free

	Item: Front cap Size(L*W*H): 45*12.2*26.2mm		Item: Closing End-cap Size(L*W*H): 26.2*12.2*16mm
---	--	---	--

Optional

	Item: Front cap(Left outlet) Size(L*W*H): 18*25*27mm		Item: Front cap (Right outlet) Size(L*W*H): 18*25*27mm		Item: Front cap (Bottom outlet) Size(L*W*H): 18*14*39mm
	Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21*15.2mm		Item: Aluminum channel 1000mm Size(L*W*H): 1000*21*15.2mm		Item: S-type Track Size(L*W*H): 500*11*14.6mm
	WR-7516 Item: Silicone Glue Size: 45g/pc		Item: Screws(matching S-type track) Dimensions: Ø3*15mm		PA3 Item: Screws Size: PA3*10mm


3D NEON

N2-8 pro

Free

	ASY-1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm Quantity(5/10m): 2-4pcs		ASY-1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm Quantity(5/10m): 2-4pcs
---	---	---	---

Optional

	ASY-1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm		ASY-1617-A3NN0035-MT Item: Aluminum track Size(L*W*H): 35*18.7*19.37mm		ASY-1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.4*16.7mm
	ASY-1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm		ASY-1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm		ASY-1617-A2NN1000-MT Item: Aluminum Channel (with metal spring) Size(L*W*H): 1000*21.2*19mm
	ASY-1617-A6NN0035-MT Item: Aluminum Channel Size(L*W*H): 35*20*21mm		ASY-1617-A6NN1000-MT Item: Aluminum Channel 1000mm (with silicone strip) Size(L*W*H): 1000*20*21mm		ASY-1617-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 35*20*30mm
	ASY-1617-A7NN1000-MT Item:Aluminum Channel 1000mm (with silicone strip)(with wings) Size(L*W*H): 1000*20*30mm		WR-7516 Item: Silicone Glue Size: 45g/pc		PA3 Item: Screws Size: PA3*10mm

N2-8 plus

Free (16*17mm)

	ASY-1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm		ASY-1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm
---	--	---	--

Optional (16*17mm)

 ASY-1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm	 ASY-1617-A3NN0035-MT Item: Aluminum track Size(L*W*H): 35*18.7*19.37mm	 ASY-1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.4*16.7mm
 ASY-1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm	 ASY-1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm	 ASY-1617-A2NN1000-MT Item: Aluminum Channel(with metal spring) Size(L*W*H): 1000*21.2*19mm
 ASY-1617-A6NN0035-MT Item: Aluminum Channel Size(L*W*H): 35*20*21mm	 ASY-1617-A6NN1000-MT Item: Aluminum Channel 1000mm (with silicone strip) Size(L*W*H): 1000*20*21mm	 ASY-1617-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 35*20*30mm
 ASY-1617-A7NN1000-MT Item:Aluminum Channel 1000mm (with silicone strip)(with wings) Size(L*W*H): 1000*20*30mm	 WR-7516 Item: Silicone Glue Size: 45g/pc	 PA3 Item: Screws Size: PA3*10mm

Optional (20*20mm)

 ASY-2020-N00NNH-EC Item: Front cap Size(L*W*H): 25*25*45mm	 ASY-2020-N00NNX-EC Item: Closing End-cap Size(L*W*H): 25*25*22mm	 ASY-2020-SNNXXXX-MT Item: Stainless steel clip Size(L*W*H): 22*25*35mm
 ASY-2020-A7NN0035-MT Item: Aluminum Channel Size(L*W*H): 25*23*35mm	 ASY-2020-A7NN0035-MT Item: Aluminum Channel (with wings) Size(L*W*H): 30*23*35mm	 WR-7516 Item: Silicone Glue Size: 45g/pc
 PA3 Item: Screws Size: PA3*10mm		

NMF1617TS

Optional

 ASY-1616-P1NN0020-MT Item: Plastic Clip Size(L*W*H): 20*16*13mm	 WR-7516 Item: Silicone Glue Size: 45g/pc	 PA3 Item: Screws Size: PA3*10mm
---	---	---

NMF1010

Free

 ASY-NMF1010-N00NNH-EC Item: Front cap Size(L*W*H): 24*18.4*12.9mm Quantity (5m): 1pcs	 ASY-NMF1010-N00NNX-EC Item: Closing End-cap Size(L*W*H): 20*12.4*12.9mm Quantity (5m): 1pcs
---	--

Optional

 ASY-NSF1010-A4NN0025-MT Item: Aluminum clip Size(L*W*H): 25*12*12.5mm Quantity (5m): 15pcs	 ASY-NSF1010-A2NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*11.7*9.5mm Quantity (5m): 5pcs	 ASY-NMF1010-MNN0500-MT Item: S-type Track Size(L*W*H): 500*11.12*9.98mm Quantity (5m): 5pcs
 WR-7516 Item: Silicone Glue Size: 45g/pc	 PA3 Item: Screws Size: PA3*10mm	

NMF1617

Free

 ASY-1617-N00NNH-EC Item: Front cap Size(L*W*H): 30*18*18mm Quantity(30m): 6-12pcs	 ASY-1617-N00NNX-EC Item: Closing End-cap Size(L*W*H): 18*19*18mm Quantity(30m): 6-12pcs
--	--

Optional

 ASY-1617-N00NNS-EC Item: Front cap (side outlet) Size(L*W*H): 25*30*19mm	 ASY-1617-A3NN0035-MT Item: Aluminum track Size(L*W*H): 35*18.7*19.37mm	 ASY-1617-MNN0500-MT Item: S-type Track Size(L*W*H): 500*17.4*16.7mm
 ASY-1617-A1NN1000-MT Item: Aluminum Channel Size(L*W*H): 1000*19.3*18.7mm	 ASY-1617-A4NN0035-MT Item: Aluminum clip (with metal spring) Size(L*W*H): 35*21.2*19mm	 WR-7516 Item: Silicone Glue Size: 45g/pc
 PA3 Item: Screws Size: PA3*10mm		

HIGH VOLTAGE SERIES

AN2-4

Optional

 Item: Installation set Quantity (15/30m): 30/60pcs	 WR-7516 Item: Silicone Glue Size: 45g/pc
--	--

Indoor Use Only

 Item: Input connector (straight outlet) Quantity (15/30m): 2/4pcs	 Item: End caps Quantity (15/30m): 1/2pcs	 Item: L Connector Quantity (15/30m): 1/2pcs
 Item: End caps Quantity (15/30m): 2/4pcs	 Item: Bottom exit Quantity (15/30m): 2/4pcs	 Item: Right side exit Quantity (15/30m): 2/4pcs
 Item: Left side exit Quantity (15/30m): 2/4pcs		

AWHE1608-D

Free

 Item: Plastic Clip Size(L*W*H): 25*19*11.8 mm	 PA3 Item: Screws Size: PA3*10mm
--	--

Optional

 Item: Front cap Size(L*W*H): 38.0*18.6*16.2 mm	 Item: Closing End-cap Size(L*W*H): 17.0*18.6*9.8mm	 WR-7516 Item: Silicone Glue Size: 45g/pc
---	---	---

AWHE1707

Optional



Item: Mid-connector
Size(L*W*H): 38*20*11mm



Item: L-Shape Connector
Size(L*W*H): 35*35*11mm



Item: PC Clip
Size(L*W*H): 15*22*10mm



Item: Closing-end Cap
Size(L*W*H): 20*17*10mm

ASN2-3

Optional



Item: Closing-end cap
Size(L*W*H): 14.3*9.8*14.5mm



Item: Clip
Size(L*W*H): 15*14.2*12.1mm



Item: Input folding cover
Size(L*W*H): 34*13.7*12.5mm



Item: Splicing folding cover
Size(L*W*H): 35.4*35*8.1mm



Item: Splicing plug
Size(L*W*H): 30*11*8.5mm



Item: 500mm EU standard plug cable
Size(L*W*H):



WR-7516
Item: Silicone Glue
Size: 45g/pc



PA3
Item: Screws
Size: PA3*10mm

UNDERWATER NEON

UMF2020 / 2222

Free



Item: Front cap (straight outlet)
Size(L*W*H): 25*25*50mm



Item: Closing-end cap
Size(L*W*H): 25*25*22mm

Optional



Item: Front cap (Side outlet)
Size(L*W*H): 45*25*30mm

360° NEON

NCR23



Pendant Kit - output wire two in one Pendant Kit - hardware and PC tube set Ceiling Kit - hardware set Ceiling Kit - hardware and PC tube set



Pendant Horizontal Kit-hardware and PC tube set Pendant Kit-steel cable and PC groove Pendant Kit-steel cable and hook



Ceiling Kit - PC groove Plastic Clip Splice set



Hardware end-cap set



Blueview Elec-Optic Tech Co., Ltd

Tel: +86-28-81480011

Fax: +86-28-81481258

Web: www.blueviewled.com Email: sales@blueviewled.com

📍 No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, Sichuan, China