



NEW PRODUCTS *COLLECTION*

www.blueviewled.com

◀ 2026 ▶

CONTENTS

Strip Light

COB Series

NEW HN-SC-480-24	01
NEW EN-FC-528-24	02
NEW EN-FC-600-24	02

Short Cut Series

TN-G5050-80-24-RGB	03
TN-GF5050-72-24-RGBW	03
FN-HG2835C+-XXX-24	04
TN-HG2835C+-XXX-XX	04
MN-G2016C-160-24	05
TN-G2016C-320-24	05

Digital Series

DN-2835-120-24-RGB-D	06
DN-5050C-60-12/24-RGB-D	07
DN-N5-120-24-RGB-DD	08
DN-F4040-108-24-RGBW	09
DN-F5050-60-24-RGBW	10
D5H-RGBWN-216-24	11
DMXN-S5050-60-24-RGBWN	12

Multi Color Series

TN-S2835T-XXX-24-WN	13
TN-SD2835-XXX-XX	14
TN-2121-320-24-RGB	15
TN-F4040-160-24-RGBW	16
TN-F5050-56-48 RGBW	17

Long Run Series

LN-H2835Z-64/128-24	18
LN-2835Z-XXX-48-XXX	19

S-Type Series

NEW GFWS-2835	20
----------------------	----

High Efficiency Series

NEW FN-H2835P-XXX-XX	21
FN-H2835Z10-XXX-24	22
FN-H2835ZG-XXX-24	23

Flexible Sheet

NEW H150-XXX-XJN-HG2835C+-XXX-24	24
H150-DMXN-2835-512-24-RGBW	25
H150-RGBW-TN-HG2835C+-800-24	26

Neon Flex

Dual-Bend Series

NMF1010	27
NEW NMF1010H	28
NEW NMF1010A	29
NMF1617	30
NEW NMF1617 PRO	31
N2-8 PLUS	32
NEW N2-8 PRO HIGH EFFICIENCY	33
N2-8 PRO 48V	34

Top-Bend Series

NDR0604-COB PLUS	35
NDR1004-COB PLUS	36
NEW NDF1617 PRO	37

CONTENTS

Side-Bend Series

NEW NSF1617 PRO	38
NSF0309	39

Sauna Room Series

WHE1608	40
NDF1617-SN	41
NSF1617-SN	41

Underwater Series

UMF2020	42
UMF2222-WN	42

Flexible Wall Washer

NEW SFO SERIES	43
NEW MFO SERIES	44

Power Supply

NEW PZP	46
----------------	----

Landscape Lighting

LED Pixel Light

NEW D35-HD	47
NEW D35-TC	47
NEW D50-MW	47

Rigid Wall Washer

NEW W30L-22	48
NEW ACWW-PRO-RGBW	49

General Lighting

LED Panel Light

NEW BVPL036-001G	50
-------------------------	----

LED Down Light

NEW BVDL015	51
NEW BVDL018	51
NEW BVDL024	51

LED Ceiling Light

NEW BVCS015	52
NEW BVCS020	52
NEW BVCS025	52
NEW BVDL016	52

Module Light

NEW QG05-E	53
NEW M3	54
M2	55

Light Bar

NEW YD-WBN	56
BP2-W	57
H3-NW	58
YD2-NW	59
FB-X 2.0	60



WCOB Dotless Lighting Strip

HN-SC-480-24

- Milky white surface for improved light diffusion.
- Smoother linear lighting with a completely **dot-free effect**.



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
HN-SC-480-24(HS)	3000K	> 90	1350	115	12	W8*H2.3mm	50mm	5m



Free Cut COB Strip

EN-FC-528/600-24

- Min cutting length **1.89mm**.
- Up to **100lm/W**.
- High density **528/600LEDs/m**.

EN-FC-528-24



EN-FC-600-24




Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
EN-FC-528-24(HS)	2700K	> 90	1224	93	13	W8*H2.3mm	1.89mm	5m
EN-FC-600-24(HS)	2700K	> 90	954	68	10	W10*H2.3mm	3.33mm	5m



Single LED Cut Multi-Color Strip

TN-G5050-80-24-RGB
TN-GF5050-72-24-RGBW

- RGB/RGBW Optional
- Min. cutting length **12.5mm**.

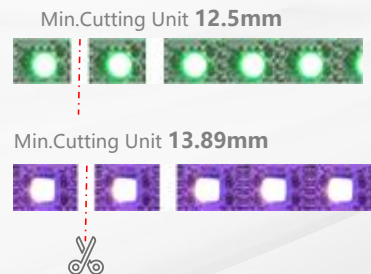

Dimmable: PWM / DALI / 0(1)-10V

Model	Color	CCT/NM	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
TN-G5050-80-24-RGB	RGB	/	915	53	17.28	W10*H2.5mm	12.5mm	5m
TN-GF5050-72-24-RGBW	RGBW	/	1120	54	20.72	W10*H2.5mm	13.89mm	4m



Single LED Cut CCT Strip

FN-HG2835C+-XXX-24
TN-HG2835C+-XXX-XX

- Up to **160lm/W**.
- Min. cutting length **4.17mm**.

Min.Cutting Unit

4.17mm 5.95mm



Min.Cutting Unit **4.17mm**



Up to **160lm/W**



Dimmable: PWM / DALI / 0(1)-10V

Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
FN-HG2835C+-168-24	4000K	> 90	3080	153	20.16	W8*H1.8mm	5.95mm	4.5m
FN-HG2835C+-240-24	4000K	> 90	2815	163	17.28	W10*H1.8mm	4.17mm	6m
TN-HG2835C+-240-24-WN	W: 2700K	> 90	2102	146	14.4	W10*H2.5mm	4.17mm	3m
	N: 6500K	> 90	2232	155	14.4			



Short Cut Strip

MN-G2016C-160-24

TN-G2016C-320-24-WN

- Every one or two LEDs cuttable.
- Min. cutting length **6.3mm**.
- Mini **5mm** width available.

Min.Cutting Unit **6.3mm**



Min.Cutting Unit **6.3mm**



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
MN-G2016C-160-24	4000K	> 90	998	130	7.68	W5*H1.3mm	6.3mm	6m
TN-G2016C-320-24-WN-8mm	W+N	/	1950	127	15.36	W8×H1.3mm	6.3mm	3m
TN-G2016C-320-24-WN-10mm	W+N	/	1981	129	15.36	W10*H1.3mm	6.3mm	5m



RGB Digital Strip

DN-2835-120-24-RGB-D

- 120 LEDs/m high density design.
- Each group of LEDs can be **independently controlled**.



Model	Color	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
DN-2835-120-24-RGB-D	RGB	787	34	23.16	W10×H1.8mm	50mm	5m



RGB Digital Strip

DN-5050C-XXX-XX-RGB-D

- Ultra cost-effective.
- Integrated constant-current circuitry.



Model	Color	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
DN-5050C-30-24-RGB-D	RGB	214	32	6.6	W10*H2.2mm	200mm	10m
DN-5050C-48-24-RGB-D	RGB	332	31	10.56	W10*H2.2mm	125mm	9m
DN-5050C-60-24-RGB-D	RGB	413	31	13.2	W12*H2.2mm	100mm	8m



Built-in IC RGB Digital Strip

DN-N5-120-24-RGB-DD

- Adopt built-in IC 5050 SMD.
- Each LED can be **controlled individually**.



Model	Color	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
DN-N5-120-24-RGB-DD	RGB	435	35.6	12.24	W10×H2.2mm	50mm	3m



RGBW Digital Strip

DN-F4040-108-24-RGBW

- RGBW 4in1 4040LEDs.
- SPI control.
- Each segment can be **independently controlled**.



Model	Color	CCT/NM	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
DN-F4040-108-24-RGBW	R	620-630	190	16	11.66	W12*H2.1mm	55.6mm	7m
	G	520-530	583	50	11.66			
	B	450-460	114	9	11.66			
	W	4000K	538	46	11.66			
	RGBW	/	1253	37	33.69			



RGBW Digital Strip

DN-F5050-60-24-RGBW

- RGBW 4in1 5050LEDs.
- SPI control.
- Each segment can be **independently controlled**.



Model	Color	CCT/NM	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
DN-F5050-60-24-RGBW	R	615-625	97	15	6.48	W14*H2.2mm	100mm	7m
	G	515-525	272	42	6.48			
	B	460-470	58	9	6.48			
	W	2700	226	35	6.48			
	RGBW	10000	636	34	18.72			



RGB+WN Digital Strip

D5H-RGBWN-216-24

- RGB+W+N LEDs, 5-channels SPI strip.
- Natural white close to warm white with excellent color mixing.



IC: FW1903S

Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
D5H-RGBWN-216-24	RGB+22K+65K	> 80	1334	58	23	W15*H1.8mm	83.3mm	7m



RGBWN Digital Strip

DMXN-S5050-60-24-RGBWN

- RGBWN 5in1 5050LEDs.
- DMX control.



Model	Color	CCT/NM	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
DMXN-S5050-60-24-RGBWN	R	619-625	142	21	6.72	W14*H2.5mm	100mm	6m
	G	518-521	309	46	6.72			
	B	465-470	67	10	6.72			
	W	2250-2325	342	51	6.72			
	N	6110-6825	423	63	6.72			
	RGBWN	/	1240	52	24			



Multi Power Strip

TN-S2835T-XXX-24-WN

- Multiple power integrated in one PCB board.
- CCT controllable.
- **Reduce the SKU.**



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
TN-S2835T-140-24-WN	2700K	> 90	273/542	114/113	2.4/4.8	W10*H1.8mm	100mm	11m
	6500K	> 90	274/536	114/112	2.4/4.8			7m
	W+N	/	1593	111	14.4			6m



CCT Tunable Strip

TN-SD2835-XXX-XX

- **2-wire** stepless dimming and CCT tuning.
- **0-100%** dimming range.
- Compatible with controllers for precise dimming.



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
TN-SD2835-120-24	2700K-6500K	> 90	1100	77	14.4	W10×H2.5mm	50mm	7m



High Density RGB Strip

TN-2121-320-24-RGB

- Ultra-high density **320LEDs/m**.
- Every 16LEDs can be cut.
- Dimmable via external controller.



Model	Color	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
TN-2121-320-24-RGB	RGB	786	52	14.4	W10×H1.6mm	50mm	3.5m



RGBW Strip

TN-F4040-160-24-RGBW

- **RGBW 4in1** 4040LEDs.
- 8 LEDs/segment, high efficiency.
- High density **160LEDs/m**.



Model	Color	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
TN-F4040-160-24-RGBW	RGBW	1248	65	19.2	W10×H2.1mm	50mm	3m



48V Strip

TN-F5050-56-48 RGBW

- DC **48V** input.
- One power end max run **17m**.



Model	Color	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
TN-F5050-56-48 RGBW	R	74	39	1.92	W16*H2mm	250mm	17m
	G	213	99	1.92			
	B	38	19	1.92			
	4000K	218	113	1.92			
	RGBW	543	67	7.68			



Long Run & High Efficiency Strip

LN-H2835Z-XXX-24

- One power end max run **30m**.
- High efficiency up to **180lm/W**.



Dimmable: PWM, ≤10 kHz


Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
LN-H2835Z-64-24	4000K	> 90	575	180	3.2	W10×H1.6mm	125mm	30m
LN-H2835Z-128-24	4000K	> 90	1600	178	9.0	W12×H1.6mm	62.5mm	22m
LN-H2835Z-160-24	4000K	> 90	2135	178	12	W10xH1.6mm	50mm	10m



Long Run 48V Strip

LN-2835Z-XXX-48-XXX

- One power end max run **63m**.
- High efficiency, up to **135lm/W**.
- CRI≥90 / CRI≥95 optional.




Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
LN-2835Z-72-48-500lm	4000K	> 90	554	135	4.1	W10*H1.8mm	166.7mm	63m
LN-2835Z-120-48-1000lm	4000K	> 90	1080	135	8	W10*H1.8mm	100mm	48m

NEW


GreatWall S-type Strip

GFWS-2835

- A better solution than traditional modules.
- Higher brightness at lower power.
- Bendable in all directions.
- **IP67** rating.

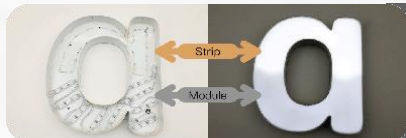

Higher brightness
at lower power.

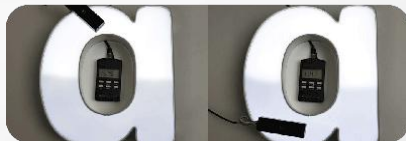

Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
GFWS-2835T-72-12	4000K	> 80	678	113	6	W6.8×H1.5mm	41.67mm	2m
GFWS-2835T-72-24	4000K	> 90	600	100	6	W6.8×H1.5mm	83.33mm	4m
GFWS-HG2835-60-24	4000K	> 80	1022	143	7.2	W6.8×H1.8mm	16.7mm	2m



NEW

High Cost-Effective Strip

FN-H2835P-XXX-XX

- **175lm/W** high efficiency.
- 3800lm/m high brightness.
- SDCM ≤3.
- Ra90+ / Ra95+ available.



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
FN-H2835P-160-24-W10	4000K	> 90	2520	175	14.4	W10*H1.8mm	50mm	6m
FN-H2835P-240-24-W14	4000K	> 90	3780	175	21.6	W14*H1.8mm	33.3mm	6m



High Efficiency Strip With 10 years Warranty

FN-H2835Z10-240-24

- High CRI90 / CRI95, SDCM ≤ 3 .
- **Gold-plated** pads for enhanced corrosion resistance.
- **10-year warranty**, L70 B50 ≥ 102000 h.




Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
FN-H2835Z10-240-24	4000K	> 95	2375	132	18	W10×H1.8mm	33.3mm	5m



High-Efficiency & High-Brightness Strip

FN-H2835ZG-XXX-24

- Ra90.
- High efficiency $\geq 182\text{lm/W}$.
- Ultra-Bright up to 7862lm/m .

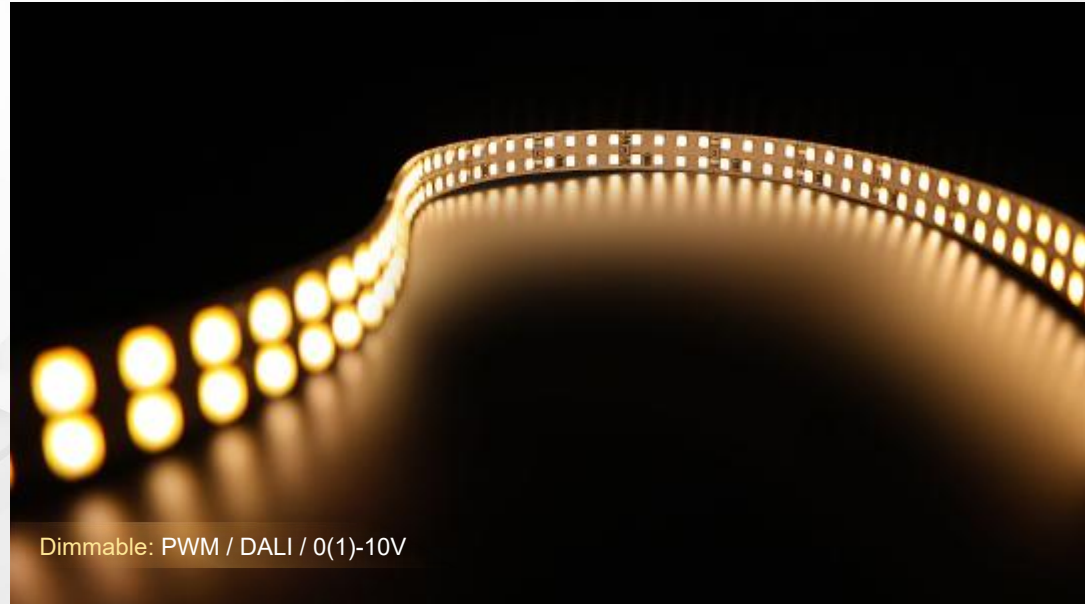

Dimmable: PWM / DALI / 0(1)-10V

Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
FN-H2835ZG-80-24	4000K	> 90	2621	182	14.4	W10*H1.6mm	100mm	5m
FN-H2835ZG-160-24	4000K	> 90	4717	182	25.9	W10*H1.6mm	50mm	4m
FN-H2835ZG-288-24	4000K	> 90	7862	182	43.2	W12*H1.6mm	27.8mm	3m



NEW

Ultra-long PCB Flexible Sheet

H150-XXX-XJN-HG2835C+
-XXX-24

- **Unlimited length** (*customizable as required*).
- Reel-to-reel design, no solder joints.
- Single unit cutting.
- Up to **152lm/W**.



Dimmable: PWM / DALI / 0(1)-10V / DMX


Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
H150-W-FJN-HG2835C+-200-24	4000K	> 90	4864	152	32	W9600*H240mm	83.33mm	4m
H150-WN-TJN-HG2835C+-324-24	2700K	> 90	3680	142	25.9	W9600*H240mm	83.33mm	4m
	6500K	> 90	3939	152	25.9			
	W+N	> 90	7515	145	51.83			
H150-RGBW-TJN-HG2835C+-512-24	RGBW (40K)	/	4752	75	63.36	W9600*H240mm	83.33mm	4m



Digital RGBW Flexible Sheet

H150-DMXN-2835-512-24-RGBW

- DMX control.
- Creating rich color changing effects via controller.
- Available IP process: IP20/64/65.

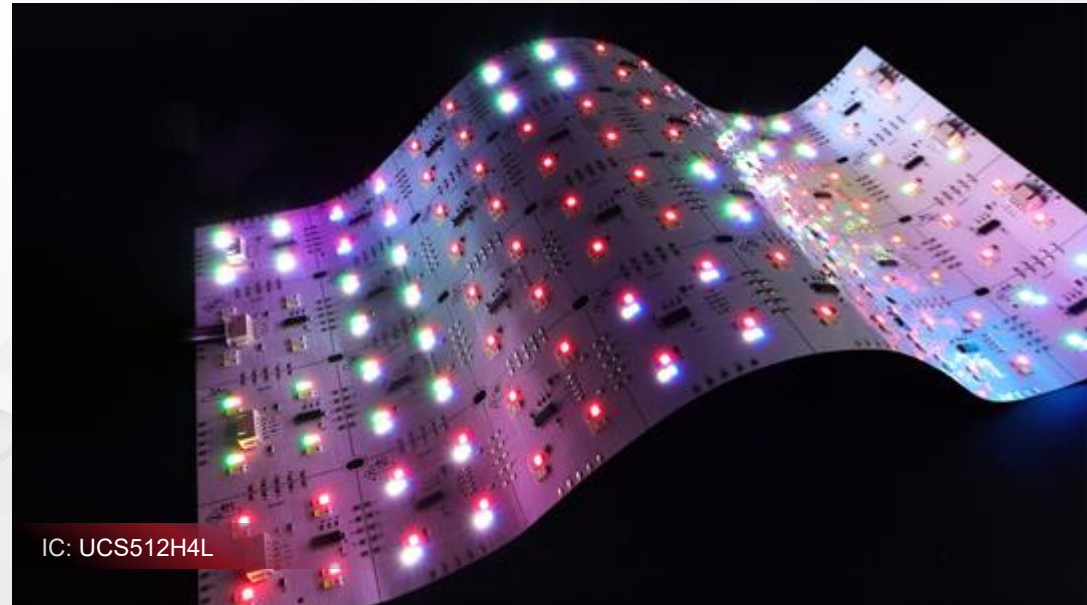


Model	Color	CCT/NM	Lm/pcs	Lm/W	W/pcs	Product Size	Min.Cutting Unit	Max Run
H150-DMXN-2835-512-24-RGBW	R	620-625	305	20	15.1	W480*H2.5*L240mm	60x60mm	1pcs
	G	525-530	841	55	15.1			
	B	465-470	172	11	15.1			
	W	6500K	1090	72	15.1			
	RGBW	/	2432	61	39.69			



Free Cutting RGBW Flexible Sheet

H150-RGBW-TN-HG2835C+-800-24

- Creating rich color changing effects via controller.
- High efficiency up to 150lm/W.
- Single-unit cutting.

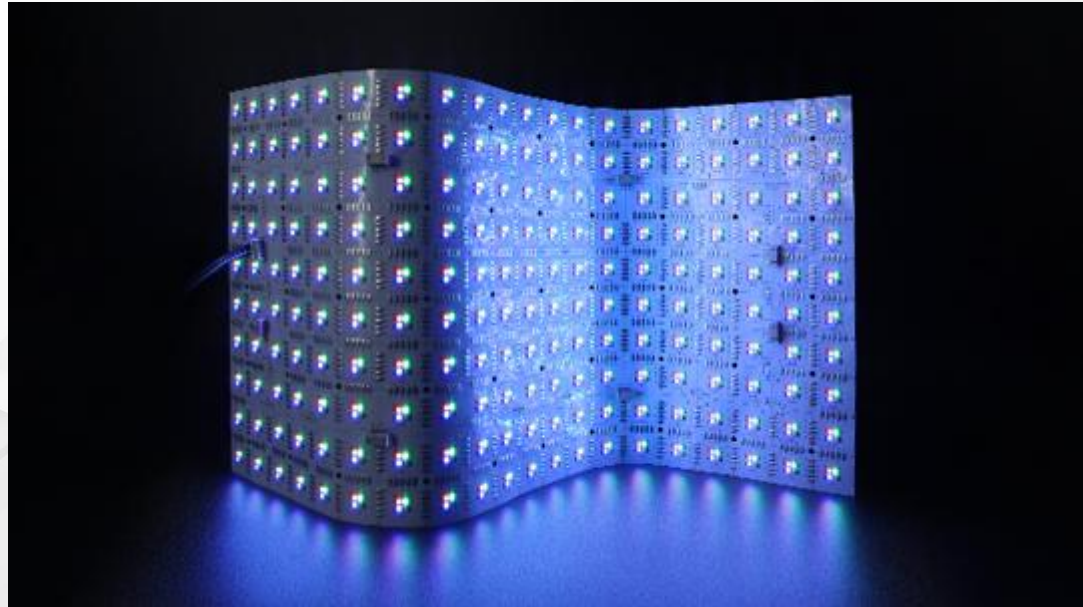




Model	Color	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Min.Cutting Unit	Max Run
H150-RGBW-TN-HG2835C+-800-24	4000K	> 90	2160	150	14.4	W610×L305mm	30.5x30.5mm	2pcs
	RGBW	/	2803	59	47.52			



Dual-Bend Mini Neon

NMF1010

- Mini size **10mm** width.
- Dual-bend application with good flexibility.

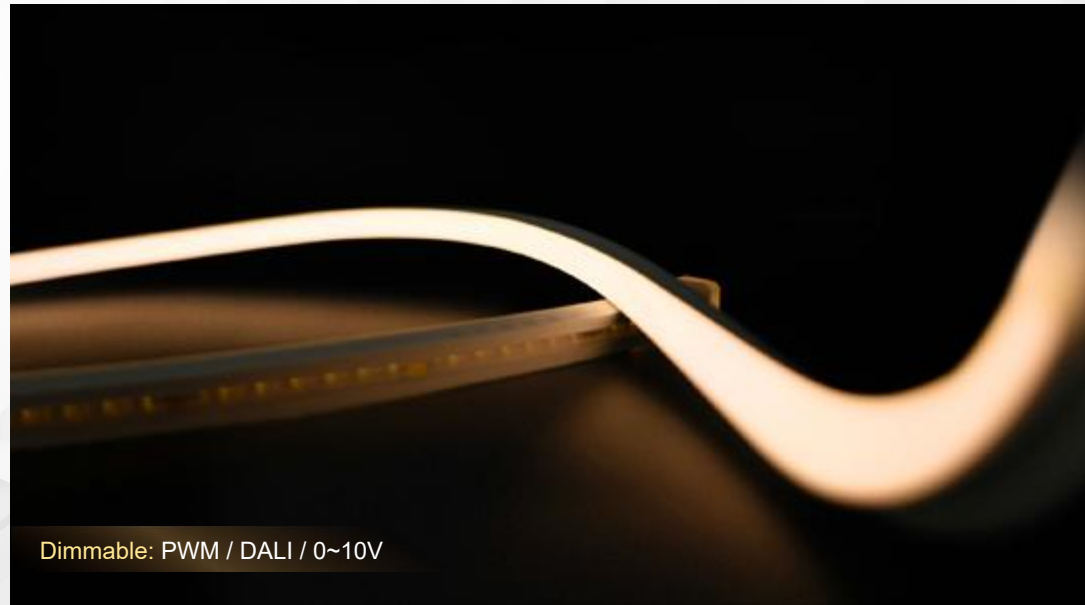

Dimmable: PWM / DALI / 0~10V



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NMF1010	4000K	> 90	624	78	8	W10*H10.5mm	50mm	5m

NEW

Dual-Bend Mini Neon

NMF1010H

- High efficiency, up to **100lm/W**.
- Mini size **10mm** width.
- **IP67/IP68** optional.





Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NMF1010H-Single color	3000K	> 90	808	101	8	W10×H10.5mm	50mm	5m

NEW

Dual-Bend Mini Neon

NMF1010A

- Free cut design.
- Min. cutting unit **5.95mm**.
- Mini size **10mm** width.
- **IP67/IP68** optional.





Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NMF1010A-Single color	2700K	> 90	459	57	8	W10×H10.5mm	5.95mm	5m



Dual-Bend Neon

NMF1617

- Dual-bend application with good flexibility.
- **W/CCT/RGB/RGBW** optional.



Dimmable: W: PWM

WN/RGB/RGBW: PWM / 0~10V / DALI



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NMF1617	4000K	> 90	912	76	12	W16*H17mm	50mm	5m

NEW

Dual-Bend Neon

NMF1617 PRO

- Support both top and side bending.
- Available in **free-cut**, **high-efficiency**, and **long-run** series.





Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NMF1617 PRO(H)	4000K	> 80	1074	109	9.6	W16*H17mm	71.4mm	10m



Trouble-free Architectural Neon

N2-8 PLUS

- Single Color/CCT/RGB/RGBW/Pixel Optional.
- New structure with enhanced stability.
- One power end max run **20m**.
- Support **dual bending**.



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
N2-8 PLUS (L)	4000K	> 90	553	48	11.52	W16*H17mm	20.83mm	20m





NEW

Outdoor Application Neon

N2-8 PRO HIGH EFFICIENCY

- Support both top and side bending.
- One power end max run **10m**.
- Up to **108lm/W**.





Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
N2-8 Pro High efficiency (L)	4000K	> 90	1037	108	9.6	W16×H17mm	71.43mm	10m
N2-8 Pro High efficiency (H)	4000K	> 90	1575	105	15	W16×H17mm	71.43mm	7m



48V Input Neon

N2-8 PRO 48V

- 48V input voltage.
- **Dual-bend** with good flexibility.
- One power end max run **50m**.



Dimmable: W: PWM



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
N2-8 PRO 48V	4000K	> 90	566	59	9.6	W16*H17mm	125mm	50m



COB PLUS

NDR0604

- Excellent linear effect.
- Ultra-small size **6mm** width.
- High efficiency **140lm/W** and high brightness.





Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NDR0604-COB Plus	4000K	> 90	1022	142	7.2	W6*H4mm	27.78mm	5m



COB PLUS

NDR1004

- Excellent linear effect.
- Small size **10mm** width.
- High efficiency **145lm/W** and high brightness.






Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NDR1004-COB Plus	4000K	> 90	1450	145	10	W10*H4mm	27.78mm	5m

NEW

Top-Bend Neon

NDF1617 PRO

- Up to **100lm/W**.
- One power end max run **10m**.

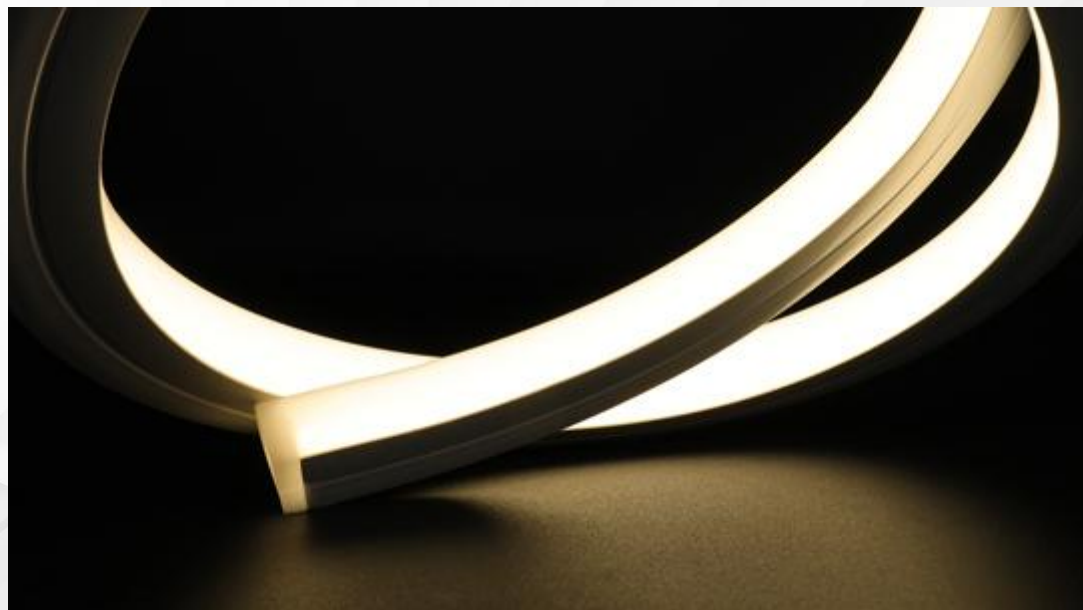



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NDF1617 PRO	4000	> 80	988	103	9.6	W16*H17mm	50mm	10m

NEW

Side-Bend Neon

NSF1617 PRO

- Up to **89lm/W**.
- One power end max run **10m**.




Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NSF1617 PRO	4000	> 80	854	89	9.6	W16*H17mm	50mm	10m



Side-Bend Mini Neon

NSF0309

- Mini Size **3*9mm**.
- Side bending with good flexibility.



Dimmable: PWM / DALI / 0~10V



Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NSF0309	4000K	> 80	389	54	7.2	W3×H9mm	41.67mm	5m



Sauna Room Strip

WHE1608-SN-FC-480-24(HS)

- UL passed.
- Max temperature resistance **110°C**.
Humidity 99%.
- **Ultra-low** operating temperature rise,
extended lifespan.





Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
WHE1608-SN-FC-480-24(HS)	4000K	> 80	410	82	5	W16*H7.5mm	50mm	10m



Sauna Room Neon

NDF1617-SN / NSF1617-SN

- **UL passed**, max temperature resistance **110°C** / humidity **99%**.
- W/CCT/RGB/RGBW/Pixel optional.
- **Ultra-low** operating temperature rise, extended lifespan.





Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
NDF1617-SN-Single color	4000K	> 90	583	81	7.2	W16×H17mm	50mm	10m
NDF1617-SN-RGBW	RGBW	/	232	29	8	W16×H17mm	83.33	5m
NSF1617-SN-Single color	4000K	> 90	533	74	7.2	W16×H17mm	50mm	10m



Underwater Neon

UMF2020 / UMF2222

- **IK10** • **IP68** • **3M**depth
- One power end max run **20m**.
- ≤5PPM Chlorine Resistance.
- UL676 E545183.

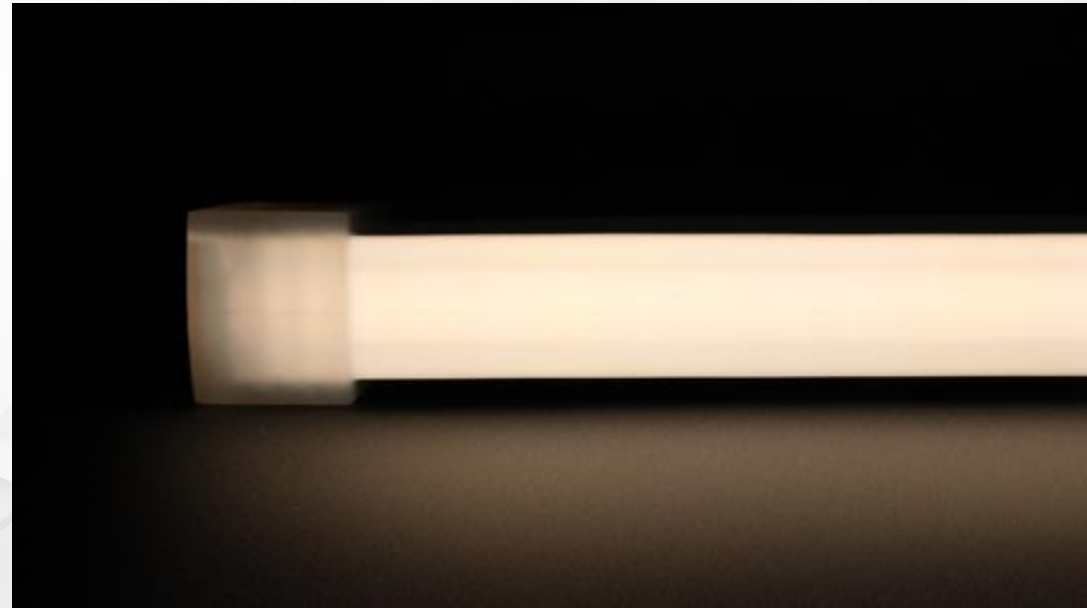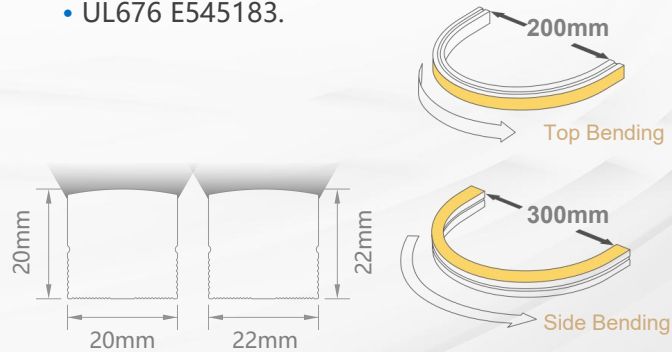


Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
UMF2020(L)-W	4000K	> 90	576	50	11.52	W20×H20mm	20.83mm	20m
UMF2222-WN	W+N	/	648	45	14.4	W22×H22mm	23.81mm	10m

NEW

Flexible Wall Washer

SFO Series

- Modules integrated with silicone tube, **IP67** rating.
- **Dual-bend** with good flexibility.
- Multiple angles and specifications available.

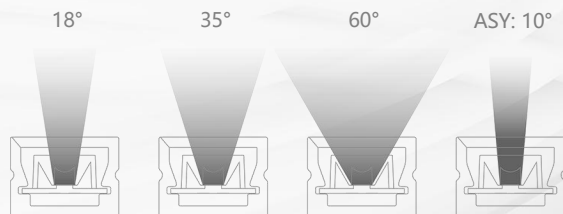

Dimmable: PWM / DALI / 0(1)-10V / DMX





Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
SFO1616-3030-48-24	4000K	> 90	1792	112	16	W16×H16mm	41.7mm	6m
SFO2317-3030-40-24	4000K	> 90	1656	115	14.4	W23×H17mm	50mm	7m
SFO2319-3535-40-24	3000K	> 90	1955	115	17	W23×H19mm	200mm	5m

NEW

Flexible Wall Washer

MFO Series

- Silicone extrusion process, **IP67** rating.
- **Dual-bend** with good flexibility.
- Multiple angles and specifications available.



Dimmable: PWM / DALI / 0(1)-10V / DMX

Model	Color	Ra	Lm/m	Lm/W	W/m	Product Size	Min.Cutting Unit	Max Run
MFO2420-3030-40-24	4000K	> 80	1792	112	16	W24xH20mm	50mm	6m
MFO3525-H3535-24-W	4000K	> 80	2700	125	21.6	W35×H25mm	333.3mm	3m
MFO3525-3535-24-RGBW DMX	RGBW (30K)	/	1125	45	25	W35×H25mm	250mm	6m

NEW

Flexible Wall Washer

MFO Series

Wall washing height up to **8m**

9m

8m

7m

6m







5m

4m

3m

2m

1m

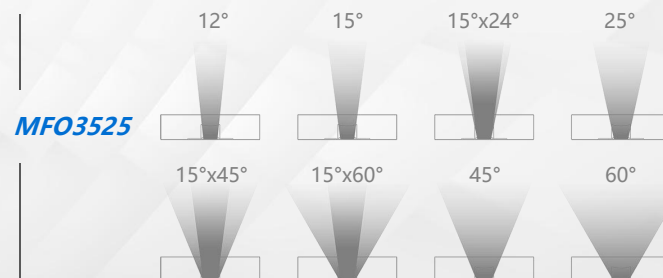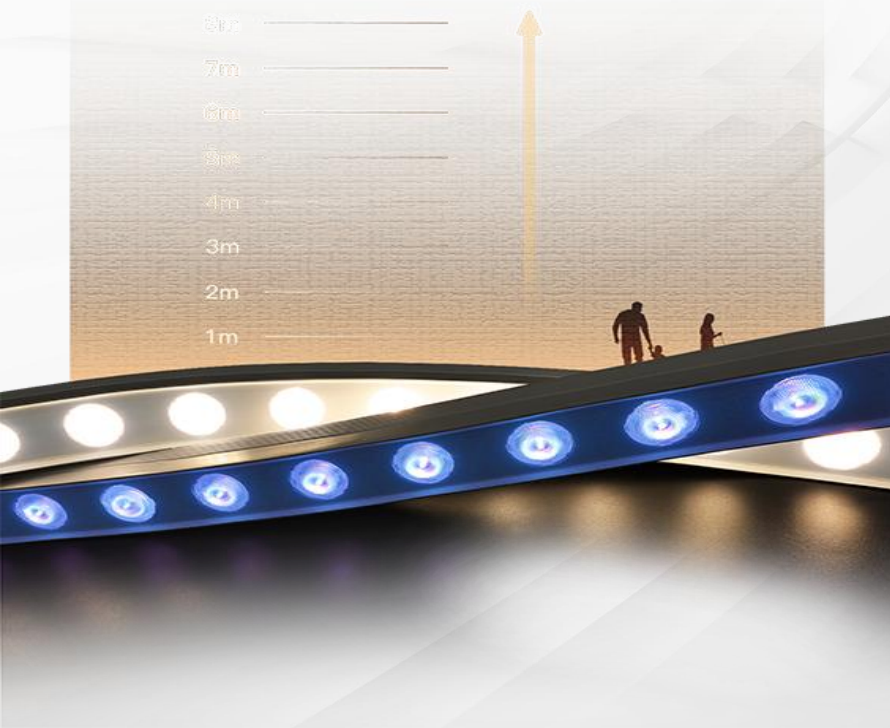

NEW

Power Supply for Outdoor Lighting

PZP-XXX-12/24

- **5 Years warranty**, Quality guaranteed
—— **product & labor fully covered.**
- High power factor: $PF \geq 0.9$.
- Excellent heat dissipation.
- **IP67 rating.**



Model	Rated Output Power	Max Output Current	Power Factor (PF)	Power Efficiency	Voltage Range
PZP-60-12/24	60W	5.0/0.25A	≥ 0.95	88.5%	85VAC~264VAC
PZP-100-12/24	100W	8.33/4.16A	≥ 0.95	89%	
PZP-200-12/24	200W	16.66/8.33A	≥ 0.98	93.5%	
PZP-300-12/24	300W	25/12.5A	≥ 0.98	93.5%	

NEW

LED Pixel Light

D35-HD / D35-TC / D50-MW

- SPI control.
- Creating rich color changing effects via controller.
- Cuttable per module.



Model	Color	Ra	Beam Angle	Lm/pcs	Lm/W	W/pcs	Product Size	Min.Cutting Unit	Max Run
D35-HD-SX	RGBW (35K)	/	160°	59.9	34	1.8	W44.6×H31.2mm	1pcs	60pcs
D35-TC-SX	RGBW (35K)	/	110°	76.7	44	1.8	W44.6×H21.6mm	1pcs	60pcs
D50-MW-SX	RGBW (35K)	/	145°	69	37	1.8	W52×H62.3mm	1pcs	60pcs

NEW

Rigid Wall Washer

W30L-22

- **Fully sealed waterproof design** with optical-grade PMMA lens.
- Available in White, CCT, RGB, and RGBW.



Model	Color	CCT	Ra	Lm/m	Lm/W	W/m	Product Size	Max Run
W30L-22	W	4000K	> 80	1530/2040/3060	85	18/24/36	W31.5×H68×L1000mm	4m
	RGBW	/	/	378/504/756	21	18/24/36		



NEW

Rigid Wall Washer

ACWW-PRO-RGBW

- Uses **high-brightness** 3535 LEDs and high-uniformity lenses.
- Supports dynamic lighting effects via **built-in microchips** or DMX control.




Beam Angle	Color	Ra	Lm/pcs	Lm/W	W/m	Product Size	Voltage
15°x15°	RGBW (30K)	> 80	3261	56.85	48	L1200*W50*H57.3mm	AC110~270V
25°x25°	RGBW (30K)	> 80	3546	61.65	48		
35°x35°	RGBW (30K)	> 80	3624	62.89	48		

NEW

LED Panel Light

BVPL036-001G

- Optical flame-retardant PC diffuser, RoHS compliant.
- Adopt premium **OSRAM** 2835 LEDs.
- Optical-grade PMMA lens with light transmittance over **91%**.

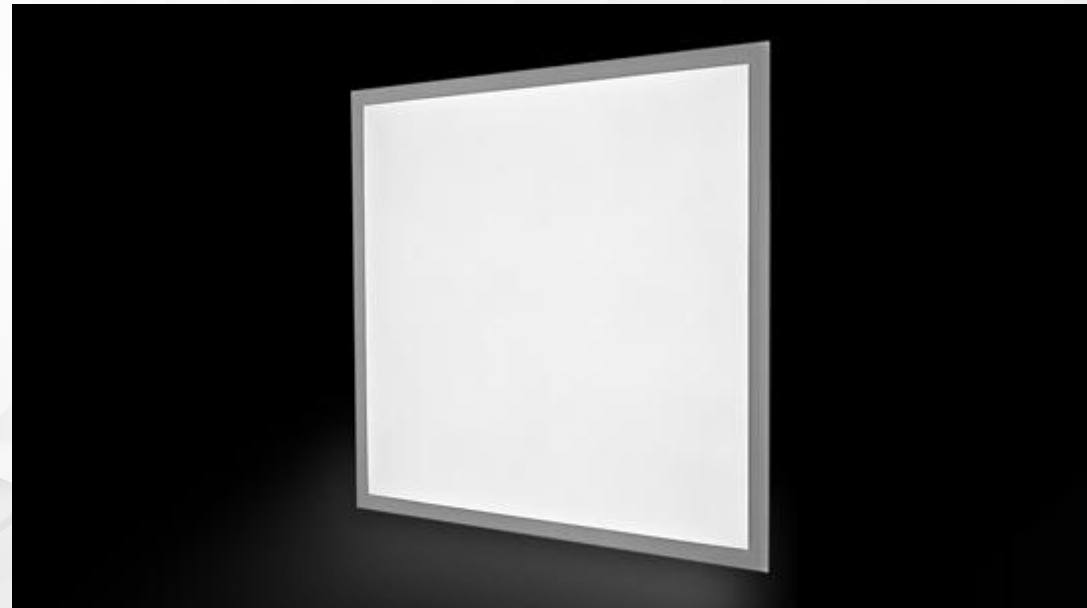

Model	Color	Ra	Beam Angle	Luminous Flux	Power	Power Factor (PF)	Product Size	Voltage
BVPL036-001G	4000K	> 90	110°	3554Lm	36W	> 0.9	L603*W603*H35mm	AC110~277V

NEW

LED Down Light

BVDL024 / 018 / 015

- **UL certified.**
- Recessed design ensures low glare.
- Adopt premium **OSRAM** light source.
- High power factor, high efficiency, low THD, and flicker-free operation.



Model	Color	Ra	Beam Angle	Cut-out Hole Size	Luminous Flux	Power	Power Factor (PF)	IP Rating	Product Size	Voltage
BVDL024	2700K-6500K	> 90	15° / 24° / 36°	145mm	2411Lm	24W	> 0.9	IP20	Ø157*H78mm	AC110-277V
BVDL018	2700K-6500K	> 90	15° / 24° / 36°	95mm	1530Lm	18W	> 0.9	IP20	Ø108*H64mm	AC110-277V
BVDL015	2700K-6500K	> 90	15° / 24° / 36°	95mm	1275Lm	15W	> 0.9	IP54	Ø105*H57mm	AC110-277V

NEW

LED Ceiling Light

BVCS015 / 020 / 025 BVDL016

- **UL certified.**
- Adjustable for flexible lighting in different applications.
- Adopt premium **OSRAM** COB light source.
- High power factor, high efficiency, low THD, and flicker-free operation.



Model	Color	Ra	Beam Angle	Cut-out Hole Size	Luminous Flux	Power	Power Factor (PF)	IP Rating	Product Size	Voltage
BVCS015	2700K-6500K	> 90	15° / 24° / 36°	90mm	1473Lm	15W	> 0.9	IP20	Ø95*H92mm	AC110-277V
BVCS020	2700K-6500K	> 90	15° / 24° / 36°	145mm	1713Lm	20W	> 0.9	IP20	Ø168*H188mm	AC110-277V
BVCS025	2700K-6500K	> 90	15° / 24° / 36°	145mm	2089Lm	25W	> 0.9	IP20	Ø168*H188mm	AC110-277V
BVDL016	2700K-6500K	> 90	15° / 24° / 36°	95mm	1380Lm	16W	> 0.9	IP20	Ø110*H95mm	AC110-277V

NEW

High Efficiency LED Module

GQ05-E

- Up to **160lm/W**.
- **180°** large beam angle.



Model	CCT	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Max Run[double feed]
GQ05-E	6500K	> 70	196	163	1.2	W17.5×H10.8xL65.5mm	50pcs

NEW

High Efficiency LED Module

M3

- Up to **170lm/W**.
- **175°** large beam angle.
- Integrated Lens with Injection Molding, **IP68** rating.



Model	CCT	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Max Run
M3	6500K	> 70	184	170	1.08	W17×H10.9xL74mm	30pcs



High Efficiency LED Module

M2

- **IP67** rating.
- Up to **160lm/W**.
- 175° large beam angle.



Model	CCT	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Max Run
M2-2	6200K-6800K	> 70	80	160	0.5	W12.9*H12.1*L44.5mm	90pcs

NEW

Full-Range Color-Tunable Light Bar

YD-WBN

- **6500K** Cool White + **2700K** Warm White + **Blue** (B).
- 3-Color mixing for wide-range color tuning.
- Secondary lens for uniform light distribution.



Dimmable: PWM / DALI / 0(1)-10V

Model	Color	CCT	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Max Run
YD-WBN-09436	N	2700K	> 90	688	86	8	W16.5×H5.3xL940mm	10pcs
	W	6500K	> 90	752	94	8		
	B	450-455nm	/	112	14	8		





Edge-lit Light Bar

BP2-W

- Designed for edge-lit lightboxes.
- Lightbox surface uniformity ≥ 0.6 .



Model	Color	CCT	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Max Run
BP2-W-0918	White	3000K-10000K	> 80	2349	145	16.2	W22×H12.7xL900mm	2pcs



High Efficiency Light Bar

H3-NW

- Up to **150lm/W**.
- Curtain style.
- Lightbox surface uniformity **≥0.8**.



Model	Color	CCT	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Max Run
H3-NW-93024	W	2700K	> 80	1512	150	10.08	W20×H7.1xL930mm	10pcs
	N	6500K	> 80	1512	150	10.08		



Dual Color Temperature Light Bar

YD2-NW

- Dual color temperature.
- Curtain style.
- Lightbox surface uniformity ≥ 0.8 .





Model	Color	CCT	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Max Run
YD2-NW-93024	W	2700K	> 80	1037	90	11.52	W20×H7.1xL930mm	10pcs
	N	6500K	> 80	1060	92	11.52		



Border Tubing Light

FB-X 2.0


- Branded LEDs.
- Fully silicone-encapsulated with **IP67** rating.
- Using PC frosted cover, **V2** flame-retardant.

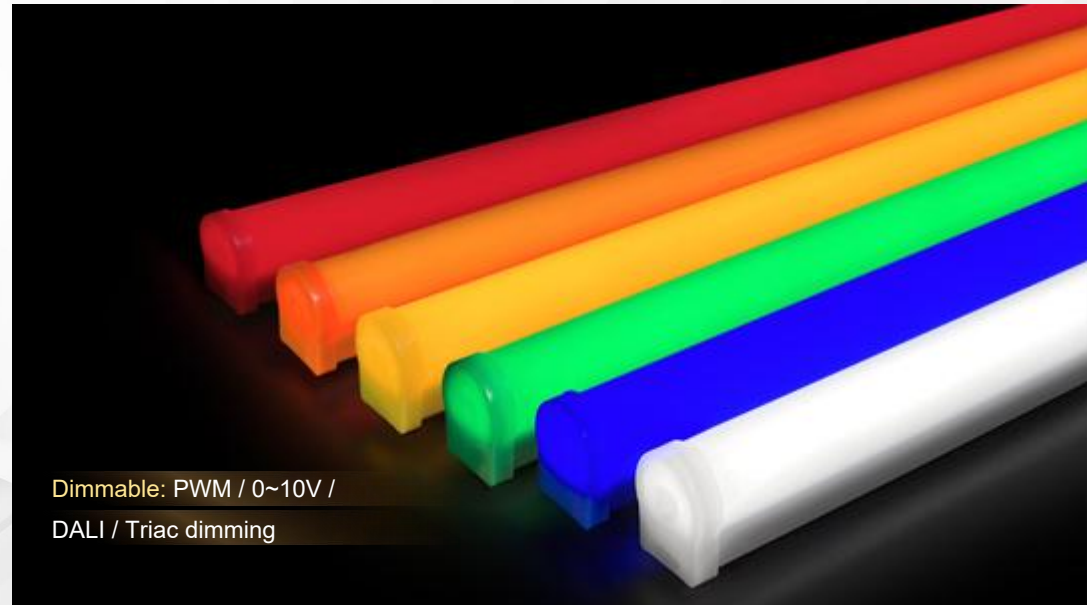


Model	Color	Ra	Lm/pcs	Lm/W	W/pcs	Product Size	Min.Cutting Unit	Max Run
FB-R 2.0-24294	Red	/	228	21	10.58	W29×H32mm	50mm	4pcs
FB-G 2.0-24294	Green	/	294	27	10.58	W29×H32mm	50mm	4pcs
FB-B 2.0-24294	Blue	/	97	9	10.58	W29×H32mm	50mm	4pcs
FB-O 2.0-24294	Orange	/	219	20	10.58	W29×H32mm	50mm	4pcs
FB-Y 2.0-24294	Yellow	/	807	76	10.58	W29×H32mm	50mm	4pcs
FB-A 2.0-24294	Amber	/	346	32	10.58	W29×H32mm	50mm	4pcs
FB-W 2.0-24294	White	> 80	1153	109	10.58	W29×H32mm	50mm	4pcs

90° CORNER CONNECTER


*90° corner connector without light source,
designed to solve corner-installation challenges.*




90° outer connector



90° corner connector



90° inside connector

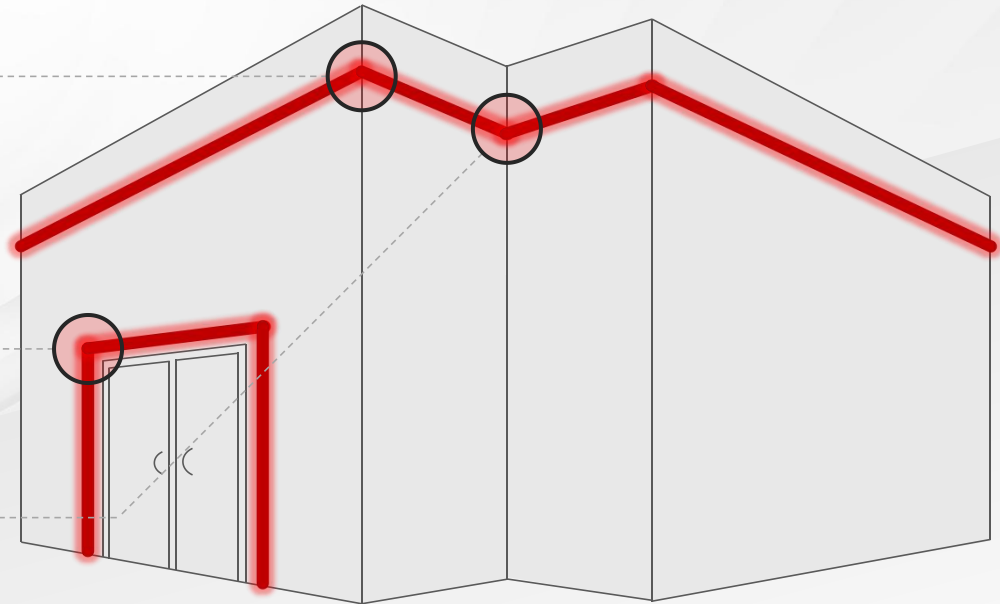




Tel: +86 28 8148 0011
Fax: +86 28 8148 1258
e-mail: sales@blueviewled.com
web : www.blueviewled.com
Postcode : 610207



Address :

No.1000, Section 2, 2nd Konggang Road,
Southwest Aviation Industrial Zone, Chengdu, Sichuan, China.

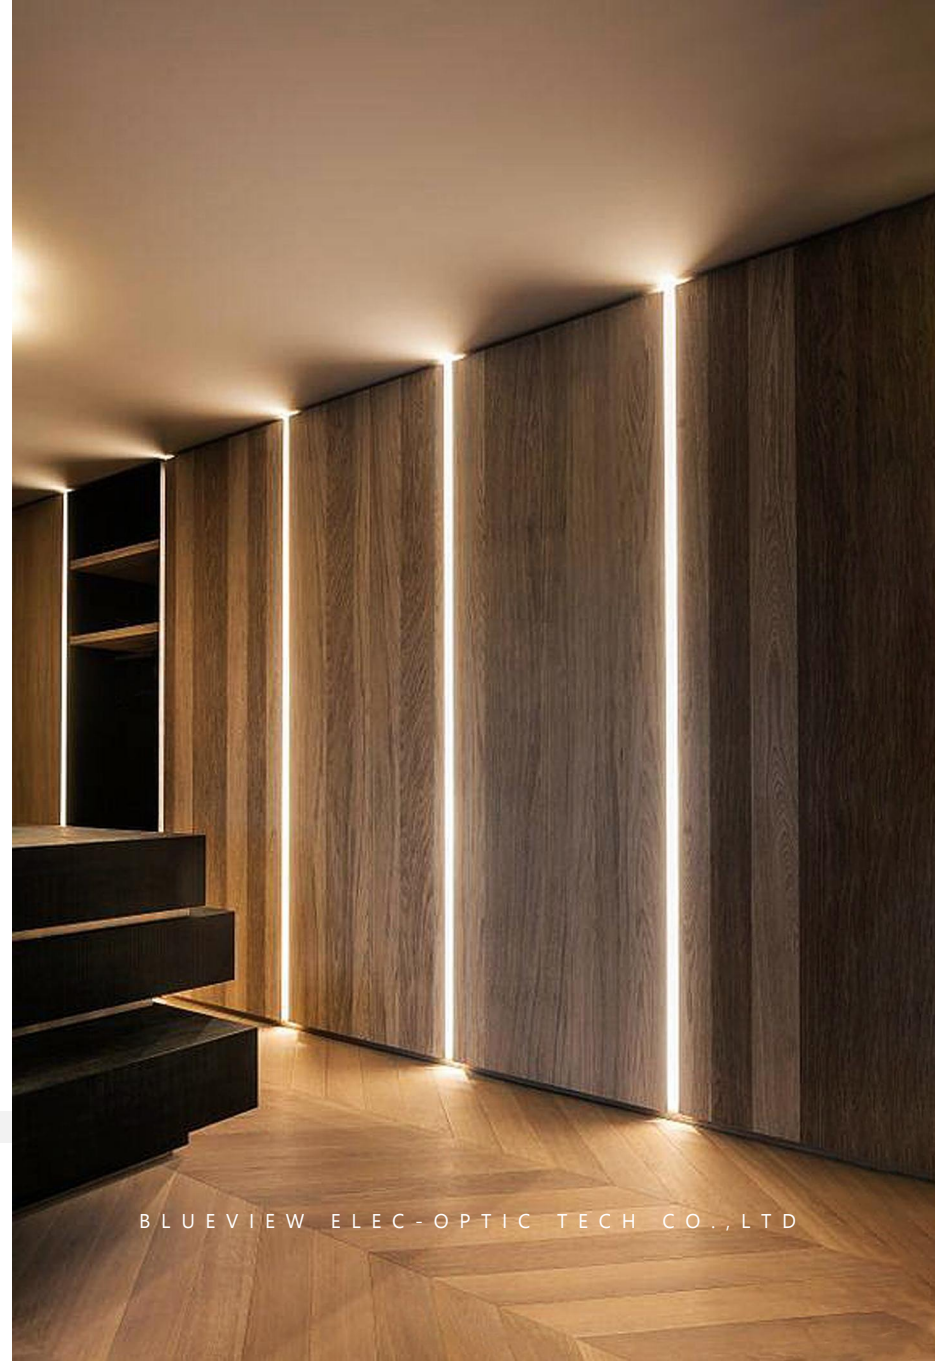

BLUEVIEW ELEC-OPTIC TECH CO.,LTD